

SPECIFICATIONS

Mechanical

Centre Contact Capvtivation: 22N.
Durability: 500 Cycles

Electrical

Nominal Impedance: 50W
Frequency Range: Not Rated
Centre Contact Resistance: 3.0mW max.
Contact Resistance: 12.0mW max
Insulation Resistance: 5000MW min.

Physical

Body: Copper Alloy
Insulator: Engineering Plastic
Contact: Copper Alloy
Plating: See "ORDERING INFORMATION"


RF Coaxial Connector

SMA Series

SMA Straight For Panel Jack




DRAWING

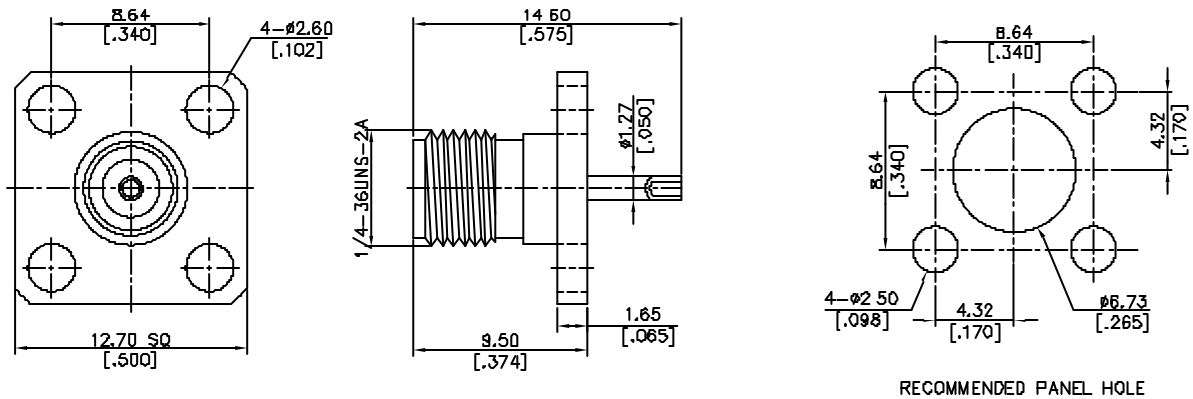

ORDERING INFORMATION

PRODUCT NO. : **KF 5 3N 0 8 - 8 S02 - 4 Y**

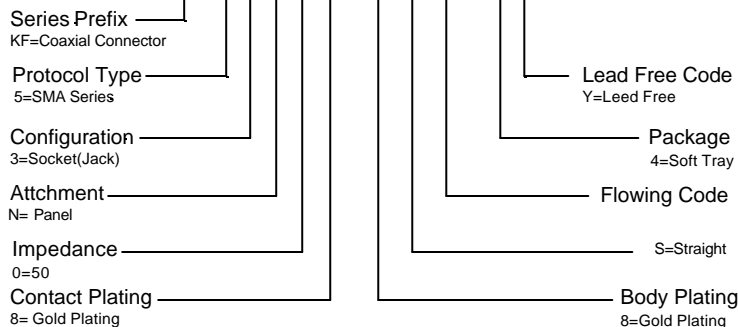

All specification & dimensions are subject to change, please call your nearest Foxconn sales representative for update information.