


1. Structure

- 1.1 Chip Size : 2.00mm X 2.00mm
- 1.2 Chip thickness : $400 \pm 20 \mu\text{m}$
- 1.3 Metallization : Top - Al, Bottom - Au
- 1.4 Passivation : Silicon Oxide
- 1.5 Bonding Pad Size
 - Anode(top) : $170 \mu\text{m} \times 170 \mu\text{m}$
- 1.6 Active Area : $1.72 \text{mm} \times 1.72 \text{mm}$

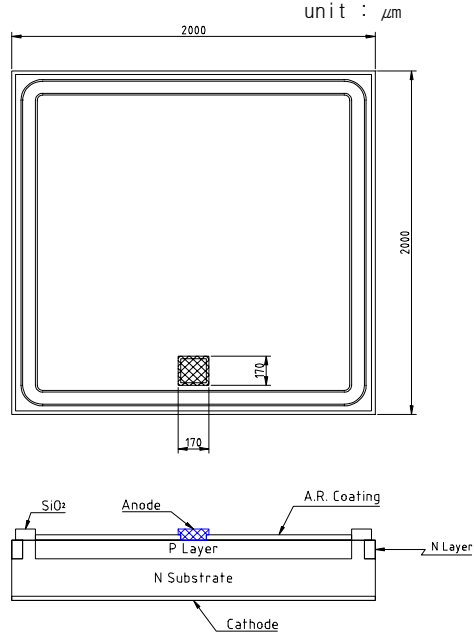

2. Electro-Optical Characteristics

(Ta=25°C)

Parameter	Symbol	Min	Typ	Max	Unit	Test Condition
Open Circuit Voltage	V_{OP}	0.3	0.32		V	Note(1)
Short Circuit Current	I_{SC}	25	32		μA	Note(1)
Spectrum Sensitivity	λ	430 ~ 1,100			nm	
Peak Sensing Wavelength	λ_P		940		nm	
Forward Voltage	V_F	0.5		1.3	V	$I_F=10\text{mA}$
Dark Current	I_D		5	10	nA	$V_R=10\text{V}$
Reverse Breakdown Voltage	B_{VR}	30			V	$I_R=10\mu\text{A}$

Note(1): Parallel light of 1,000Lux illumination is applied by a Tungsten lamp

3. Maximum Ratings

(Ta=25°C)

Parameter	Symbol	Maximum rating	Unit
Reverse Breakdown Voltage	BVR	30	V
Junction Temperature	TJ	150	°C

AUK Corp.

Eoyang factory, 513-5 Eoyang-dong, Iksan, 570-210, Korea

Tel. +82 63 839 1111 Fax. +82 63 835 8259

www.auk.co.kr

