


627-410/422

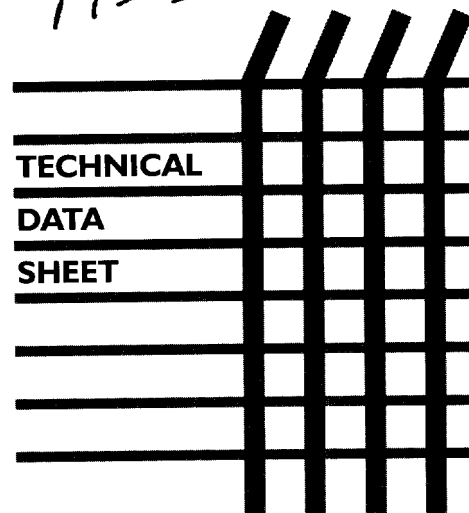

AT293

Premier CLOSURE PLATE TAPE
Issue U1-02 January 1996

Description

A polythene coated fabric with a strong heat and cold resistant adhesive which has been specifically designed with a built in safety feature. The adhesive will set when temperatures are consistently at the top end of its service temperature range, over long periods of time. If thermosetting does occur it indicates the appliance may not have been serviced regularly or there is a problem with the appliance.

Applications

For sealing of gas fire closure plates to a variety of surfaces including plaster, brick and polished stone.

Specifications

Meets British Gas specification PRS10

Technical Data

Typical values

Thickness	0.300mm
Breaking Load	85N/cm
Elongation	30%
Adhesion	
Steel	4.2N/cm
Self	2.7N/cm
Aluminium	4.1N/cm
Service Temp	-50°C to 110°C
Application Temp	5°C to 45°C

Note

Except where indicated otherwise, the above figures are average values and should not be regarded as MAXIMUM or MINIMUM values for specification purposes. The Company reserve the right to improve products and any change in specification will result in a re-issue of the relevant 'Technical Data' sheet. Customers should satisfy themselves that the tape is suitable for their requirements whether after such modifications or otherwise. Please check that you have the latest issue of the 'Technical Data' sheet. All slitting and length tolerances are to British Standards, but other tolerances are available by request. Before use the customer is advised to consult the Health & Data sheet produced by the company for this product, which is available on request.

Storage

Tapes stored below the minimum application temperature will require warming up to that level before use. Up to 24 hours may be required for this to take place.

24 Hour Technical Service Hotline 0116 265 1210 • Fax: 0116 265 3070

ADVANCE TAPES INTERNATIONAL LTD., P.O. BOX 122, LEICESTER LE4 5RA
TELEPHONE: 0116 251 0191. FAX: 0116 265 2046.

