

B30**FEMALE HEADER**
PROFILE : 5.8 mm SIDE-ENTRY TYPE (DUAL ROW)

PITCH: 2.54mm

MATERIAL

INSULATOR - PBT (UL 94V-0)

CONTACT - COPPER ALLOY

SPECIFICATIONS**CURRENT RATING**

1 AMP DC

CONTACT RESISTANCE

30 MILLIOHM MAX.

INSULATION RESISTANCE





1000 MEGOHM MIN.

DIELECTRIC VOLTAGE

500V AC FOR ONE MINUTE

OPERATING TEMPERATURE

-40°C TO 105°C

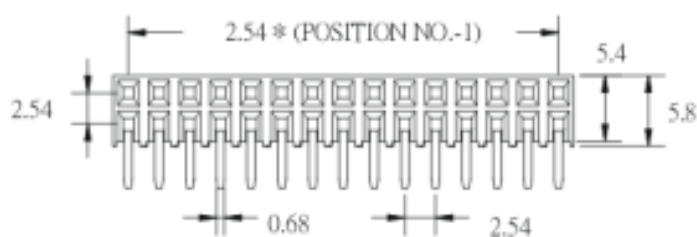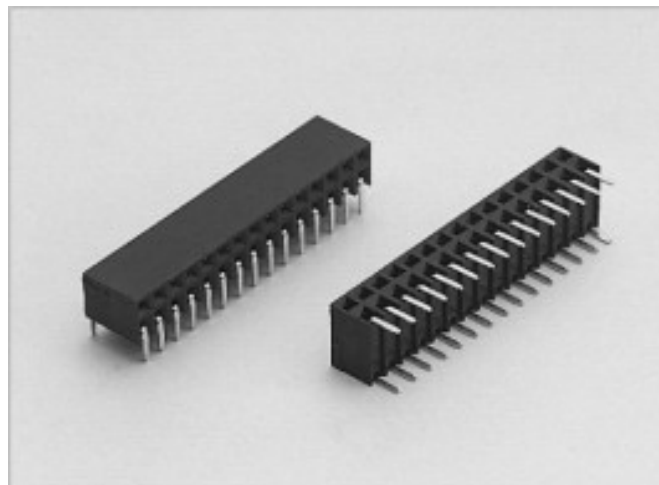

i@

HOW TO ORDER:B30 - 1 - 2 - 3 - 4

1.NO. OF CONTACT	2.CONTACT MATERIAL	3.CONTACT PLATING	4.INSULATOR COLOR
DUAL ROW 2*2 - 2*40	B: PHOSPHOR BRONZE	T: TIN PLATED S: SELECTIVE G: GOLD FLASH A: 5 μ " INCH GOLD B: 10 μ " INCH GOLD C: 15 μ " INCH GOLD D: 30 μ " INCH GOLD	1. BLACK