
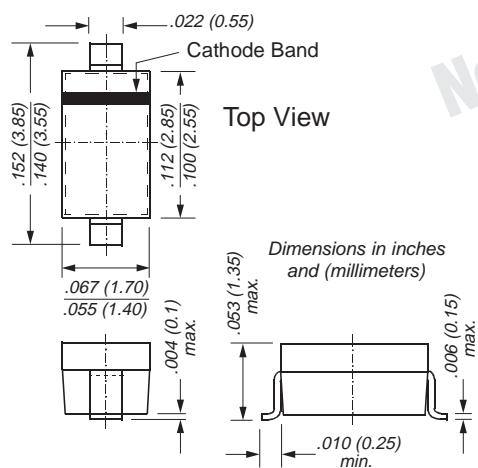



SOD-123


Low VF Small Surface Mount Schottky Rectifier

**Reverse Voltage 20V
Forward Current 0.5A**

Mounting Pad Layout

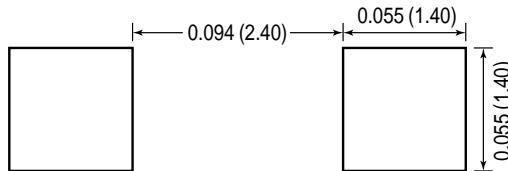

Mechanical Data

- Case:** SOD-123 plastic case
Polarity: Band denotes cathode end
Weight: 0.01g
Marking Code: B2
Packaging Codes/Options:
 D3/10K per 13" reel (8mm tape)
 D4/3K per 7" reel (8mm tape)

Features

- For surface mounted applications
- Low profile package
- Ideal for automated placement
- Low power loss, high efficiency
- High temperature soldering:
 $250^{\circ}\text{C}/10$ seconds at terminals

Maximum Ratings and Thermal Characteristics ($\text{T}_A = 25^{\circ}\text{C}$ unless otherwise noted)

Parameter	Symbol	Value	Unit
Maximum repetitive peak reverse voltage	V_{RRM}	20	V
Working peak reverse voltage	V_{RWM}	20	V
Maximum DC blocking voltage	V_R	20	V
Max. average forward rectified current at rated V_R , $T_C = 115^{\circ}\text{C}$	$I_{F(AV)}$	0.5	A
Peak forward surge current 8.3ms single half sine-wave $T_L = 25^{\circ}\text{C}$	I_{FSM}	5.5	A
Voltage rate of change at rated V_R , $T_J = 25^{\circ}\text{C}$	dv/dt	1,000	V/ μs
Typical thermal resistance junction to lead junction to ambient	$R_{\Theta JL}$ $R_{\Theta JA}$	118 206	$^{\circ}\text{C/W}$
Operating junction and storage temperature	T_J , T_{STG}	-55 to +125	$^{\circ}\text{C}$

Electrical Characteristics ($\text{T}_A = 25^{\circ}\text{C}$ unless otherwise noted)

Maximum instantaneous forward voltage ⁽¹⁾	at $I_F = 0.1\text{A}$, $T_J = 25^{\circ}\text{C}$ at $I_F = 0.1\text{A}$, $T_J = 100^{\circ}\text{C}$ at $I_F = 0.5\text{A}$, $T_J = 25^{\circ}\text{C}$ at $I_F = 0.5\text{A}$, $T_J = 100^{\circ}\text{C}$	V_F	0.300 0.220 0.385 0.330	V
Maximum DC reverse current	$V_R = 10\text{V}$, $T_J = 25^{\circ}\text{C}$ $V_R = 10\text{V}$, $T_J = 100^{\circ}\text{C}$ $V_R = 20\text{V}$, $T_J = 25^{\circ}\text{C}$ $V_R = 20\text{V}$, $T_J = 100^{\circ}\text{C}$	I_R	75 5 250 8	μA mA μA mA

Note: (1) Pulse test: 300 ms pulse width, 1% duty cycle.

10/26/01

Low VF Small Surface Mount Schottky Rectifier

Ratings and Characteristic Curves (TA = 25°C unless otherwise noted)

Fig. 1 – Derating Curve Output Rectified Current

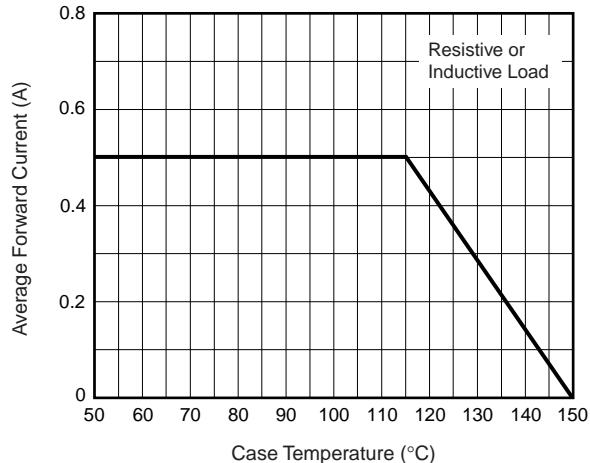


Fig. 2 – Maximum Non-Repetitive Peak Forward Surge Current

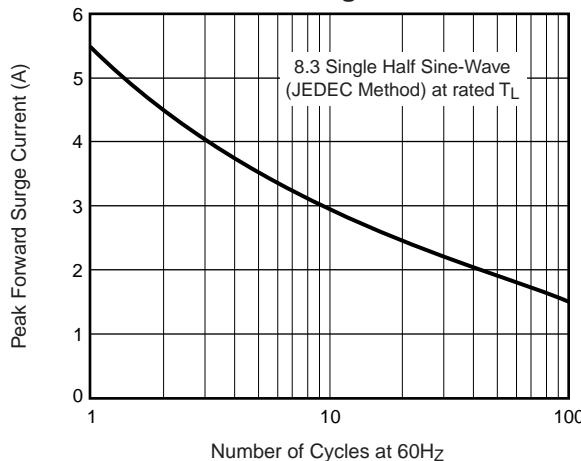


Fig. 3 – Typical Instantaneous Forward Characteristics

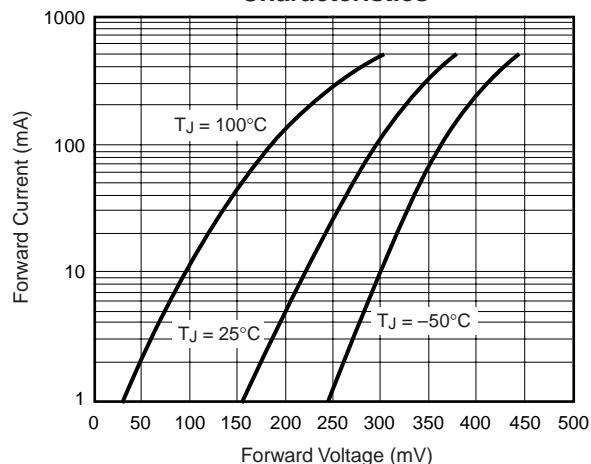


Fig. 4 – Typical Reverse Characteristics

