




Trimmer Potentiometers


3352 Series 1/8" Round Trimming Potentiometers




- Single-turn / Cermet / Industrial / Open Frame
- Stable cermet element offers infinite resolution
- Very low profile
- Thumb and screwdriver adjustment
- Power Rating: 0.5 watt at 85°C

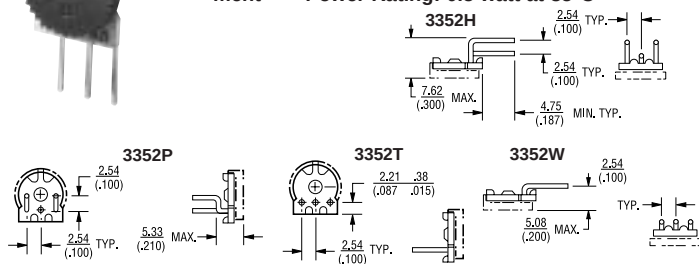

3386 Series 1/8" Square Trimming Potentiometers





- Single-Turn / Cermet / Industrial / Sealed
- Power Rating: .5 watt at 85°C
- Tolerance: $\pm 10\%$
- PC board stand-offs and retention feature
- Also available: More Resistive Values, Tape and Reel, Knob for Finger Adjust, Extended Shaft, Cross Slot Rotors. Call.

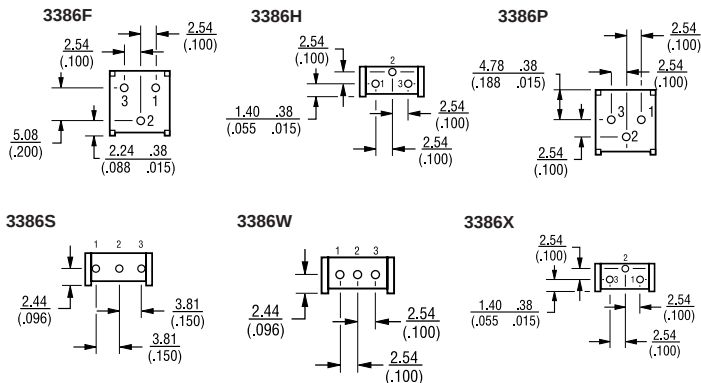

Mfr.'s Type	Mfr.'s Type	Ohms	Each	
			1-99	100-499
3352T-1-101	3352W-1-101	100	1.06	.85
3352T-1-201	...	200		
3352T-1-501	...	500		
3352T-1-102	3352W-1-102	1000		
3352T-1-202	...	2000		
3352T-1-502	3352W-1-502	5000		
3352T-1-103	3352W-1-103	10,000		
3352T-1-203	3352W-1-203	20,000		
3352T-1-503	3352W-1-503	50,000		
3352T-1-104	3352W-1-104	100,000		
3352P-1-102	3352H-1-102	1000	1.06	.85
3352P-1-502	3352H-1-502	5000		
3352P-1-103	3352H-1-103	10,000		

3362 Series 1/8" Trimming Potentiometers

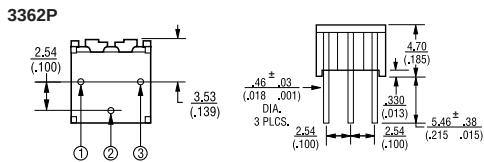


- Single-Turn / Cermet / Industrial / Sealed
- Rotor designed for automatic machine adjust interface
- Withstands harsh environments
- Power Rating: .50 watt at 70°C
- Adjustment Angle: 240° nom.
- Resistance Tolerance: $\pm 10\%$

Mfr.'s Type	Ohms	Temperature Coefficient	Each	
			1-99	100-499
3362P-1-101	100	± 100 ppm/°C	.89	.71
3362P-1-201	200			
3362P-1-501	500			
3362P-1-102	1000			
3362P-1-502	5000			
3362P-1-103	10,000			
3362P-1-503	50,000			
3362P-1-504	500,000			

Mfr.'s Type	Mfr.'s Type	Ohms	Each	
			1-99	100-499
...	3386H-1-101	100	1.00	.80
...	3386H-1-201	200		
...	3386H-1-501	500		
3386F-1-501	3386H-1-102	1000		
3386F-1-102	3386H-1-202	2000		
3386F-1-202	3386H-1-502	5000		
3386F-1-502	3386H-1-103	10,000		
3386F-1-103	3386H-1-203	20,000		
3386F-1-203	3386H-1-503	50,000		
3386F-1-503	3386H-1-104	100,000		
3386F-1-104	3386H-1-105	1,000,000		
3386P-1-101	...	100	1.00*	.80*
3386P-1-201	...	200		
3386P-1-501	...	500		
3386P-1-102	3386S-1-102	1000		
3386P-1-202	...	2000		
3386P-1-502	...	5000		
3386P-1-103	3386S-1-103	10,000		
3386P-1-203	...	20,000		
3386P-1-253	...	25,000		
3386P-1-503	...	50,000		
3386P-1-104	...	100,000		
3386P-1-204	...	200,000		
3386P-1-504	...	500,000		
3386P-1-105	...	1,000,000		
3386W-1-501	3386X-1-501	500	1.00	.80
3386W-1-102	3386X-1-102	1000		
3386W-1-202	...	2000		
3386W-1-502	3386X-1-502	5000		
3386W-1-103	3386X-1-103	10,000		
3386W-1-203	3386X-1-203	20,000		
3386W-1-503	3386X-1-503	50,000		
3386W-1-104	3386X-1-104	100,000		
3386W-1-204	...	200,000		
3386W-1-105	...	1,000,000		

*3386S.....(1-99) 1.11 (100-499) .89

Adjustment Tools



Features

- Meets UL 94V-0
- Pocket clip
- For use on most trimmer shafts/rotors
- Recessed end for use with extended shafts

Mfr.'s Type H-90 Each 1.61
Mfr.'s Type H-91* Each 1.61
*Recommended for use with trimmer models 3224 and 3214.

Trimming Potentiometers
Available in packages as small as 3mm.
Surface and through-hole mounting.
Cermet, wirewound and carbon elements.
Single and multiturn models.
Sealed and open-frame.
Top, side, front and rear adjustment.

Carlton-Bates Company is a full line Bourns® distributor. Consult us for complete information on products not shown in this catalog.