

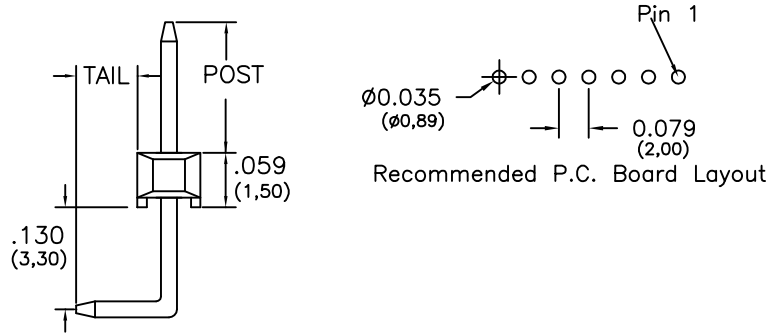
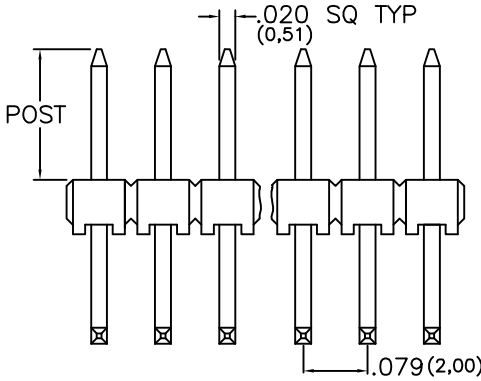
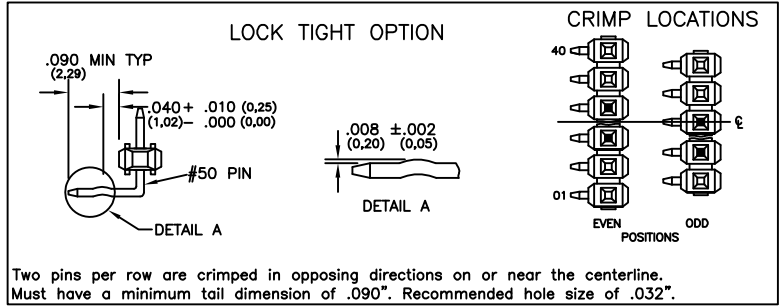


Major League Electronics .079 cl Terminal Strip Headers - Custom - Right Angle - Elevated

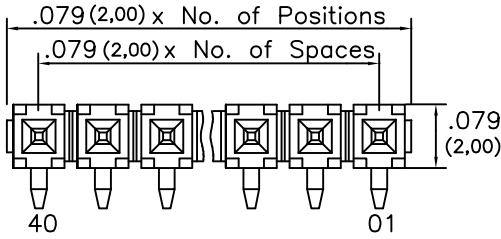

Length (L) – Post Height (P) – .209 (5.31) = Tail length (T)

Ordering Information

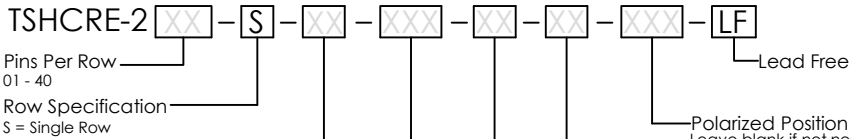

Pin Options				
Length		Max. Post Height		
.377	9.58mm	.078	1.98mm	01
.397	10.08mm	.098	2.48mm	02
.417	10.59mm	.118	3.00mm	04
.456	11.58mm	.157	3.99mm	05
.555	14.10mm	.256	6.50mm	06
.575	14.61mm	.276	7.01mm	08
.594	15.09mm	.295	7.49mm	10

Plating Options	
G	10µ Gold on Contact Area / Flash on Tail
T	Matte Tin All Over
GT	10µ Gold on Contact Area / Matte Tin on Tail
H	30µ Gold on Contact Area / Matte Tin on Tail
F	Gold Flash over Entire Pin

Desired Post Height
 Please specify
 e.g. .100 (2.54) = 100

Specifications


- Current Rating: 3.0 Ampere
- Insulation Resistance: 1000MΩ Min.
- Dielectric Withstanding: 500V AC
- Contact Resistance: 20 mΩ Max.
- Operating Temperature: -40°C to + 105°C
- Max. Process Temperature:
 - Peak: 260°C up to 10 secs.
 - Process: 230°C up to 60 secs.
 - Wave: 260°C up to 6 secs.
 - Manual Solder: 350°C up to 5 secs.

Materials

- Contact Material: Phosphor Bronze
- Insulator Material: Nylon 6T
- Plating: Au or Sn over 50µ" (1,27) Ni

Products cut to specific sizes are uncancellable/nonreturnable

Parts are subject to change without notice

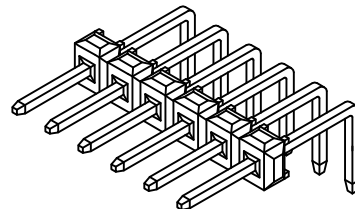

Mates with:

- BCSS,
- BSSH,
- BSSHC,
- BSSQ,
- BSSQC,
- BSSQM,
- LMSBC,
- LSSHSM,
- SMBC,
- SSHQ,
- SSHQR,
- SSHR,
- SSHS,
- SSHSM,
- ULSMBC

TSHCRE-2-S SERIES

.079cl Single Row - Custom - Elevated
 Terminal Strip Headers - Right Angle

20 FEB 07

Scale
 NTS

UNLESS OTHERWISE SPECIFIED
 DIMENSIONS IN INCHES (MM)
 TOLERANCES ARE:

ONE PLACE DECIMALS ±.100
 TWO PLACE DECIMALS ±.010
 THREE PLACE DECIMALS ±.005
 FOUR PLACE DECIMALS ±.0020

ANGLES
 ±5°



4235 Earnings Way, New Albany, Indiana, 47150, USA
 1-800-782-3486 (USA/Canada/Mexico)
 Tel: 812-944-7244
 Fax: 812-944-7268
 E-mail: mle@mlelectronics.com
 Web: www.mlelectronics.com

Edition
 1

Sheet
 1/1