



EC6A SERIES

7.5WATT 2:1 INPUT RANGE

DC-DC CONVERTERS



FEATURES

- * 7.5W Isolated Output
- * 24-Pin DIP Package
- * Efficiency to 87%
- * 2:1 Input Range
- * Regulated Outputs
- * Pi Input Filter
- * Continuous Short Circuit Protection
- * CE Mark Meets 2004/108/EC
- * UL60950-1 Approval
- * Without Tantalum Capacitor inside



MODEL NUMBER	INPUT VOLTAGE	OUTPUT VOLTAGE	OUTPUT CURRENT		INPUT CURRENT		% EFF.	Capacitor Load max.
			MIN.	MAX.	NO LOAD	FULL LOAD		
EC6A01	9-18VDC	5VDC	0 mA	1500 mA	25 mA	781 mA	80	4700uF
EC6A02	9-18VDC	12VDC	0 mA	625 mA	25 mA	753 mA	83	4700uF
EC6A03	9-18VDC	15VDC	0 mA	500 mA	25 mA	744 mA	84	4700uF
EC6A04	9-18VDC	±5VDC	0 mA	±750 mA	30 mA	772 mA	81	2200uF
EC6A05	9-18VDC	±12VDC	0 mA	±310 mA	30 mA	753 mA	83	2200uF
EC6A06	9-18VDC	±15VDC	0 mA	±250 mA	30 mA	753 mA	83	2200uF
EC6A07	9-18VDC	3.3VDC	0 mA	1500 mA	25 mA	529 mA	78	4700uF
EC6A11	18-36VDC	5VDC	0 mA	1500 mA	20 mA	377 mA	83	4700uF
EC6A12	18-36VDC	12VDC	0 mA	625 mA	20 mA	359 mA	87	4700uF
EC6A13	18-36VDC	15VDC	0 mA	500 mA	20 mA	359 mA	87	4700uF
EC6A14	18-36VDC	±5VDC	0 mA	±750 mA	25 mA	372 mA	84	2200uF
EC6A15	18-36VDC	±12VDC	0 mA	±310 mA	25 mA	356 mA	87	2200uF
EC6A16	18-36VDC	±15VDC	0 mA	±250 mA	25 mA	372 mA	84	2200uF
EC6A17	18-36VDC	3.3VDC	0 mA	1500 mA	20 mA	264 mA	78	4700uF
EC6A21	36-72VDC	5VDC	0 mA	1500 mA	10 mA	193 mA	81	4700uF
EC6A22	36-72VDC	12VDC	0 mA	625 mA	10 mA	184 mA	85	4700uF
EC6A23	36-72VDC	15VDC	0 mA	500 mA	10 mA	182 mA	86	4700uF
EC6A24	36-72VDC	±5VDC	0 mA	±750 mA	15 mA	191 mA	82	2200uF
EC6A25	36-72VDC	±12VDC	0 mA	±310 mA	15 mA	182 mA	85	2200uF
EC6A26	36-72VDC	±15VDC	0 mA	±250 mA	15 mA	184 mA	85	2200uF
EC6A27	36-72VDC	3.3VDC	0 mA	1500 mA	10 mA	136 mA	76	4700uF

NOTE: 1. Nominal Input Voltage: 12, 24 or 48VDC

SPECIFICATIONS

All Specifications Typical At Nominal Line, Full Load, and 25°C Unless Otherwise Noted

INPUT SPECIFICATIONS:

Input Voltage Range	12V	9-18V
	24V	18-36V
	48V	36-72V
Input Surge Voltage (100ms max.)	12V	20Vdc max.
	24V	50Vdc max.
	48V	100Vdc max.
Input Filter	Pi Type	

OUTPUT SPECIFICATIONS:

Voltage Accuracy	±2.0% max.	
Voltage Balance (Dual)	±1.0% max.	
Temperature Coefficient	±0.05%/°C	
Ripple & Noise, 20MHz BW	100mV p-p max.	
Short Circuit Protection	Continuous	
Line Regulation Single/Dual (note 1)	±0.2% max.	
Load Regulation Single (note 2)	±0.5% max.	
	Dual (note 3)	±1.0% max.
Start up time	EC6A0XX	5ms typ.
	Other	20ms typ.


NOTE:

1. Measured From High Line to Low Line
2. Measured From Full Load to 10% Load
3. Measured From Full Load to 1/4 Load
4. Suffix "S" to the Model Number with SMD packages
5. Maximum case temperature under any operating condition should not be exceeded 100°C

GENERAL SPECIFICATIONS:


Efficiency	See Table	
Isolation Resistance	10 ⁹ ohm min.	
Isolation Capacitance	560pF typ.	
Isolation Voltage	1500VDC min.	
Switching Frequency	300KHz typ.	
Operating Ambient Temperature Range	-40°C to +85°C	
De-rating, Above 71°C	Linearly to Zero power at 100°C	
Case Temperature (note 5)	100°C max.	
Cooling	Natural Convection	
Storage Temperature Range	-40°C to +100°C	
Humidity	95% RH max. Non condensing	
MTBF	MIL-STD-217F, GB25°C, Full Load	1800Khrs typ.
Dimensions	DIP	1.25x0.80x0.40 inches(31.8x20.3x10.2mm)
	SMD	1.25x0.80x0.45 inches(31.8x20.3x11.4mm)
Weight	18.4g	
Case Material	Black Coated Copper with Non-conductive Base	

Typical Derating curve for Natural Convection

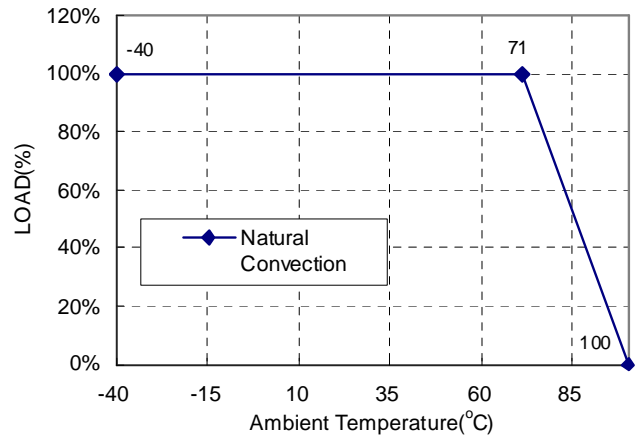

Case A Dimensions:

NOTE: Pin Size is 0.02" Inch (0.5mm) DIA
 All Dimensions In Inches (mm)
 Tolerances Inches: X.XX= ±0.02 , X.XXX= ±0.010
 Millimeters: X.X= ±0.5 , X.XX=±0.25

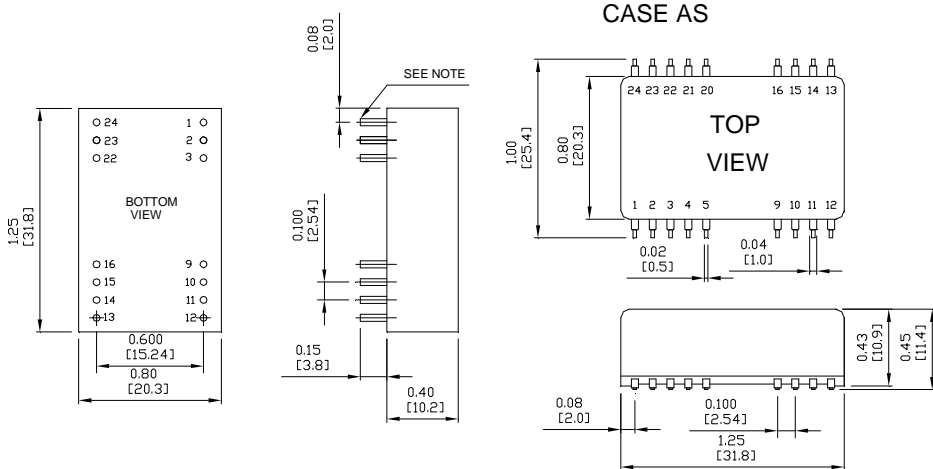

Pin	PIN CONNECTION			
	Single Output		Dual Output	
	DIP	SMD	DIP	SMD
1,24	NP	NC	NP	NC
2,3	-V Input		-V Input	
4,5	NP	NC	NP	NC
9	NC		Common	
10,15	NC		NC	
11	NC		-V Output	
12,13	NP	NC	NP	NC
14	+V Output		+V Output	
16	-V Output		Common	
20,21	NP	NC	NP	NC
22,23	+V Input		+V Input	

* NC-NO CONNECTION WITH PIN
 * NP-NO PIN

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Cincon:

[EC6A27](#) [EC6A01](#) [EC6A02](#) [EC6A03](#) [EC6A04](#) [EC6A05](#) [EC6A06](#) [EC6A07](#) [EC6A11](#) [EC6A12](#) [EC6A13](#) [EC6A14](#)
[EC6A15](#) [EC6A16](#) [EC6A17](#) [EC6A21](#) [EC6A22](#) [EC6A23](#) [EC6A24](#) [EC6A25](#) [EC6A13S](#) [EC6A03S](#) [EC6A24S](#)
[EC6A11S](#) [EC6A27S](#) [EC6A02S](#) [EC6A15S](#) [EC6A26](#) [EC6A25S](#) [EC6A23S](#) [EC6A04S](#) [EC6A12S](#) [EC6A22S](#)
[EC6A05S](#) [EC6A07S](#) [EC6A21S](#) [EC6A06S](#) [EC6A17S](#) [EC6A26S](#) [EC6A01S](#) [EC6A14S](#) [EC6A16S](#)