



397 Route 281 – P.O. Box 1175
Tully, New York 13159-1175
Phone: 315 696-6676
Fax: 315 696 9923
Email: sales@acipower.com
www.acipower.com

ACR-0621-1805

PRODUCT DATA SHEET – PAGE 1 OF 2

7.7" SINGLE BANK LED RAIL

(Single Bank, 62V @ 82mA)

10/21/09

GENERAL DESCRIPTION


The ACR-0621-1805 is designed as a replacement for field replaceable, dual tube, single edge lit 8.4" CCFL displays. The rail utilizes protection circuit to ensure the whole rail will not fail in the unlikely event of an individual LED failure.

The rail requires the use of a constant current source to properly drive the LED's.

The LED rail is compatible with any of ACI's I-Drive series of LED Drivers.

MECHANICAL / ENVIRONMENTAL

- Weight = 5.2 grams
- Altitude = 35,000 Ft maximum
- Humidity < 95% non-condensing
- Size (L x W x H) = 7.700 IN x 0.240 IN x 0.128 IN
- PCB thickness = 0.032 IN
- Input connector = CON1
- RoHS compliant

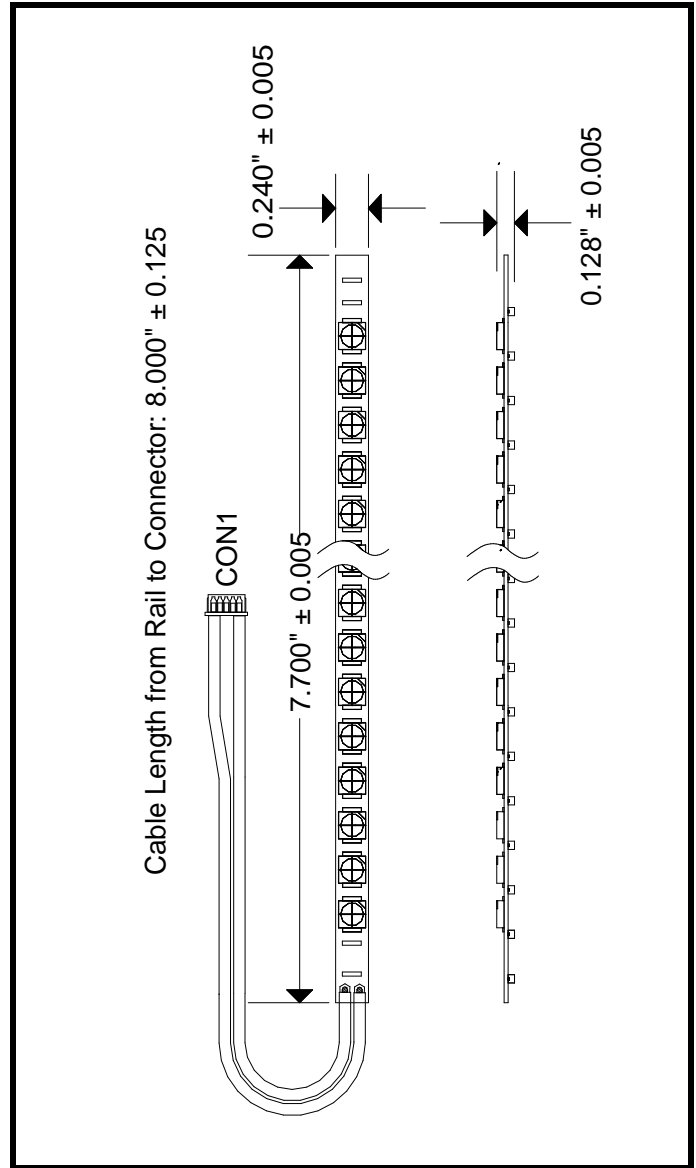

397 Route 281 – P.O. Box 1175
Tully, New York 13159-1175
Phone: 315 696-6676
Fax: 315 696 9923
Email: sales@acipower.com
www.acipower.com

PRODUCT DATA SHEET – PAGE 2 OF 2

MAXIMUM RATINGS

10/21/09

Symbol	Parameter	Value	Unit
Tled	Operating temperature of LED edge light (light rail contact)	-30 to +85	Deg-C
Tstg	LED Rail storage temperature	-40 to +100	Deg-C
Ifwd	Maximum LED edge-light forward current (DC)	125	mA

LED OPTICAL CHARACTERISTICS

LED Manufacturer specifications for reference purpose only

Symbol	Parameter	Test Conditions	Min	Typ	Max	Unit
BL	LED Brightness	Ifwd = 300mA	72	78.8	85.6	Lm
X	White X coordinate			0.319		-
Y	White Y coordinate			0.317		-

LED RAIL ELECTRICAL CHARACTERISTICS

Ifwd = 82mA, Tled = +75Deg-C (LED's without heat sinking to the display)

Symbol	Parameter	Test Conditions	Min	Typ	Max	Unit
Vfwd	LED rail forward voltage drop		55	62	69	Vdc

TYPICAL LED RAIL PERFORMANCE GRAPHS

