

# SPECIFICATION FOR APPROVAL

## 承認書

Description : Piezo Audio Indicator

Kingstate Part No. : KPEG272

Customer's Model No. : \_\_\_\_\_

Specification No. : PKD-7407

Number Of The Edition : 1.2

| CUSTOMER'S APPROVED SIGNATURE |  |  |
|-------------------------------|--|--|
|                               |  |  |

志豐電子股份有限公司 KINGSTATE ELECTRONICS CORP.





Address: 10F, No. 69-11, Sec. 2, Chung Cheng E. Rd., Tamshui County, Taipei Hsien, Taiwan, R.O.C.

International sales dept: TEL:886-2-2809-5651 FAX:886-2-2809-7151

Domestic sales dept: TEL:886-2-2809-0668 FAX:886-2-28096748

<http://www.kingstate.com.tw>

| Approved by   | Checked by  | Issued by       |
|---|---|-----------------|
|  9/20/05 |  9/20/05 | Fei<br>9/20/05' |

## A. SCOPE 範疇


This specification applies piezo audio indicator, **KPEG272**

此規格書適用於壓電式蜂鳴器, **KPEG272**

## B. SPECIFICATION 規格

| No. | Item   | Unit  | Specification                           | Condition   |
|-----|--|-------|---|---|
| 1   | Resonant frequency<br>共振頻率                     | KHz   | 3.5 ± 0.5                               |   |
| 2   | Operating Volt. range<br>操作電壓範圍                | VDC   | 3 ~ 28                                  |   |
| 3   | Current consumption<br>消耗電流                    | mA    | MAX 6                                   | at 12VDC  |
| 4   | Sound pressure level<br>輸出音壓                   | dB    | MIN 88                                  | at 30cm/12VDC   |
| 5   | Rated Voltage<br>額定電壓                          | VDC   | 12                                      |   |
| 6   | Tone<br>聲音                                     |       | Continuous<br>直音                        |   |
| 7   | Operating temp.<br>操作溫度                        |       | -30 ~ +85                               |   |
| 8   | Storage temp.<br>儲存溫度                          |       | -40 ~ +95                               |   |
| 9   | Dimension<br>尺寸                                | mm    | 31.5 x H14.4                            | See appearance drawing<br>請參照外觀尺寸圖  |
| 10  | Weight (MAX)<br>重量                             | gram  | 7.0                                     |   |
| 11  | Material<br>材質                                 |       | ABS UL-94 1/16" HB HIGH HEAT<br>(BLACK) |   |
| 12  | Terminal<br>端子                                 |       | Pin type<br>(鍍全錫Plating Sn)             | See appearance drawing<br>請參照外觀尺寸圖  |
| 13  | Environmental<br>Protection Regulation<br>環保法規 |       | RoHS                                    |   |
| 14  | Storage life<br>保存期限                           | month | 6                                       | 6 months preservation at room temp.<br>(25±3 ), Humidity40%<br>在室溫下25±3 ,濕度40%以下可保存6個月. |

## C. APPEARANCE DRAWING 外觀尺寸圖

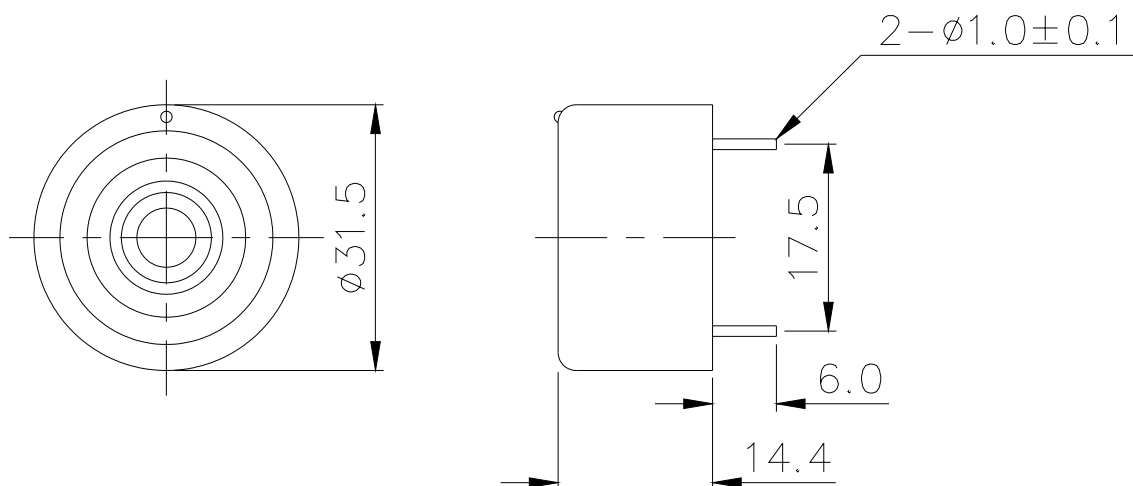


Tol : ± 0.5

Unit : mm

## D. MEASURING METHOD 測量方法

S.P.L. Measuring Circuit 音壓測試接線圖

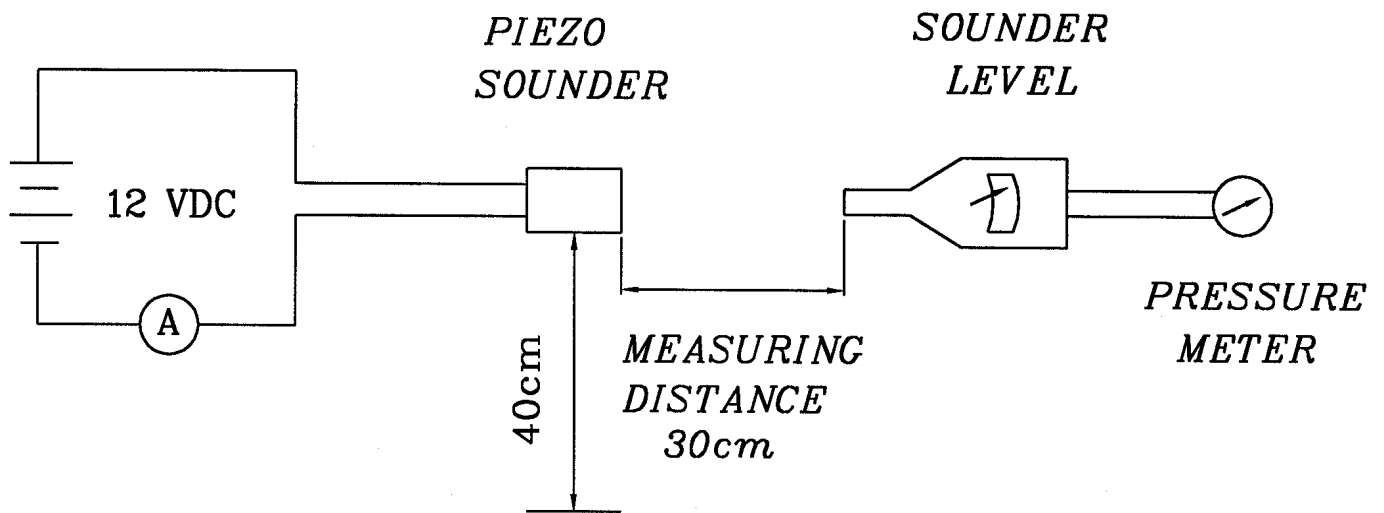


Mic : RION S.P.L meter UC30 or equivalent

Mic : RION 噪音計 UC30 或同等品

## E. VOLTAGE: SOUND PRESSURE LEVEL / VOLTAGE: CURRENT CONSUMPTION


CHARACTERISTICS 電壓與音壓/電壓與耗電流之特性

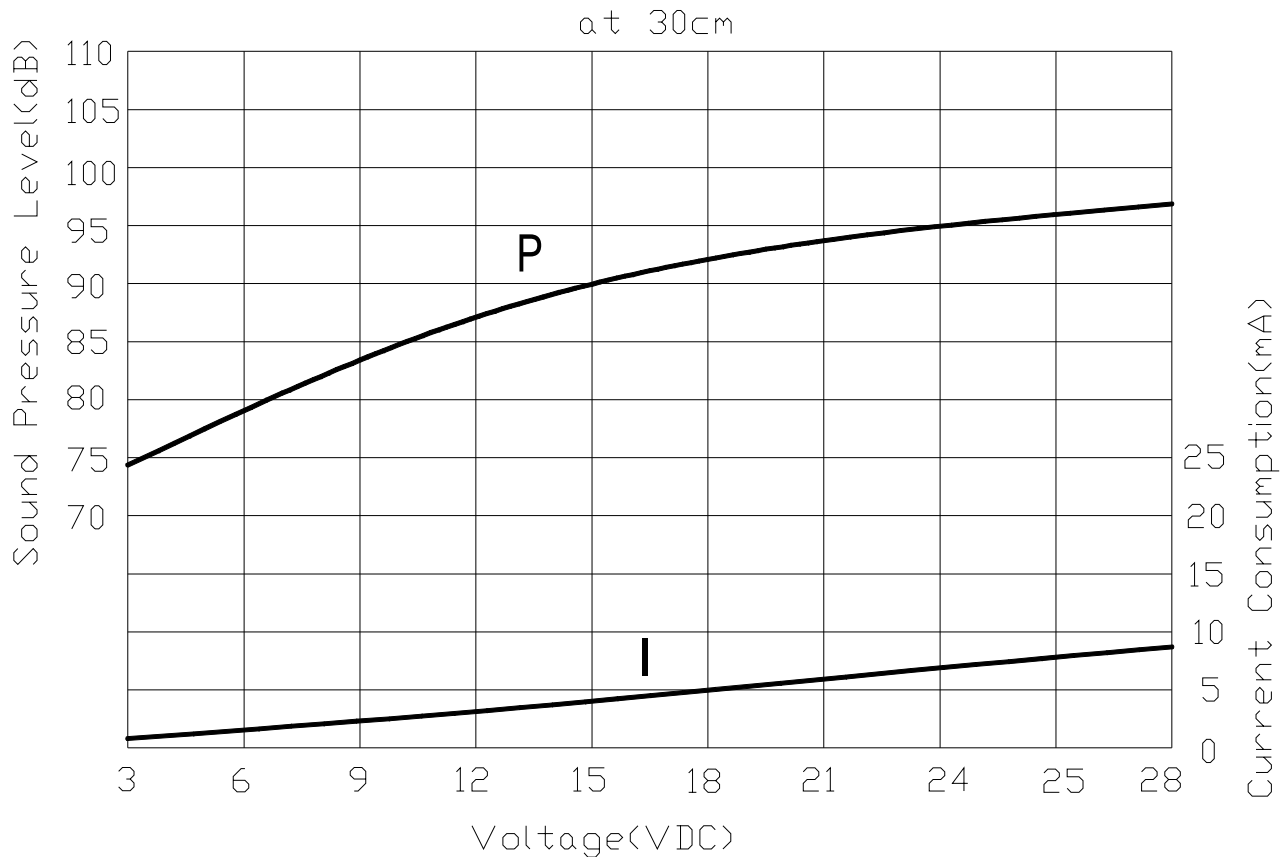

## F. MECHANICAL CHARACTERISTICS 機械特性

| No. | Item                                 | Test Condition  | Evaluation standard  |
|-----|--------------------------------------|---|--|
| 1   | Solderability<br>焊錫附著性               | Lead terminals are immersed in rosin for 5 seconds and then immersed in solder bath of $+270\pm5$ for $3\pm1$ seconds.<br>端子部份浸入松香溶液 5 秒後,再浸入 $+270\pm5$ 溶錫槽中 $3\pm1$ 秒.  | 90% min. lead terminals shall be wet with solder. (Except the edge of terminal)<br>浸入端子部份附著焊錫 90%以上.(末端斷面不算)   |
| 2   | Soldering Heat Resistance<br>焊錫耐熱性   | Lead terminal are immersed up to 1.5mm from solder's body in solder bath of $+300\pm5$ for $3\pm0.5$ seconds or $+260\pm5$ for $10\pm1$ seconds.<br>距離端子根部 1.5mm 的位置,浸入 $+300\pm5$ 的焊錫槽 $3\pm0.5$ 秒,或 $+260\pm5$ 的焊錫槽 $10\pm1$ 秒. | No interference in operation<br>操作上無任何不良   |
| 3   | Terminal Mechanical Strength<br>端子強度 | The force 10 seconds of 9.8N (1.0kg) is applied to each terminal in axial direction.<br>各端子的軸方向施以 9.8N (1.0kg) 的力量 10 秒.  | No damage and cutting off<br>端子不鬆動, 不脫落  |
| 4   | Vibration<br>振動試驗                    | Buzzer shall be measured after being applied vibration of amplitude of 1.5mm with 10 to 55hz band of vibration frequency to each of 3 per-pendicular directions for 2 hours.<br>振動週波數 10 55HZ、全振幅 1.5mm 於 X.Y.Z 3 個方向,各 2 小時.     | The value of oscillation frequency/ current consumption should be in 10% compared with initial ones. The SPL should be in $\pm 10$ dB compared with initial one. |
| 5   | Drop test<br>落下測試                    | The part only shall be dropped from a height of 75cm onto a 40mm thick wooden board 3 times in 3 axes (X.Y.Z). (a total of 9 times).<br>單體從 75 公分高處, X.Y.Z.3 個方向,各 3 回,落於 40mm 厚木板上.  | 諧振頻率與消耗電流變化量須在 $\pm 10\%$ 內. 輸出音壓變化量須在 $\pm 10$ dB 內.  |

## G. ENVIRONMENT TEST 環境測試
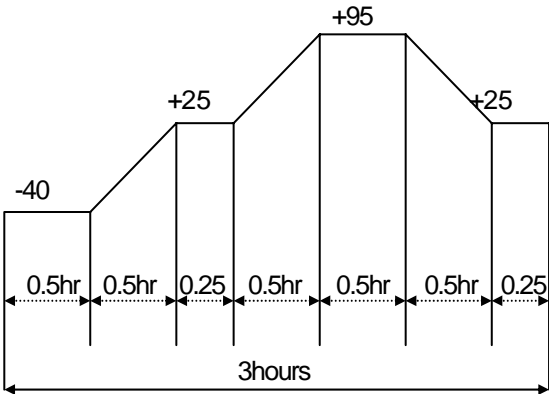
| No. | Item                       | Test Condition   | Evaluation standard  |
|-----|----------------------------|--|--|
| 1   | High temp. test<br>高溫測試    | After being placed in a chamber at $+95$ for 240 hours<br>置於 $+95$ 環境中 240 小時  | Being placed for 4 hours at $+25$ , buzzer shall be measured. The value of oscillation frequency/ current consumption should be in $\pm 10\%$ compared with initial ones. The SPL should be in $\pm 10$ dB compared with initial one.<br>經測試後, 靜置於 $+25$ (室溫) 環境中 4 小時後, 諧振頻率與消耗電流變化量須在 $\pm 10\%$ 內. 輸出音壓變化量須在 $\pm 10$ dB 內. |
| 2   | Low temp. test<br>低溫測試     | After being placed in a chamber at $-40$ for 240 hours<br>置於 $-40$ 環境中 240 小時  |  |
| 3   | Humidity test<br>相對濕度測試    | After being placed in a chamber at $+40$ and $90\pm 5\%$ relative humidity for 240 hours<br>置於 $+40$ , 相對濕度 $90\pm 5\%$ 環境中 240 小時   |  |
| 4   | Temp. cycle test<br>溫度循環試驗 | The part shall be subjected to 5 cycles. One cycle shall be consist of :<br>單體承受溫度循環測試 5 次,其循環內容如圖示:<br> |  |

## H. RELIABILITY TEST 信賴性測試

| No. | Item                        | Test condition  | Evaluation standard   |
|-----|-----------------------------|---|---|
| 1   | Operating life test<br>壽命測試 | 1. Continuous life test 高溫壽命測試(連續)<br>48 hours continuous operation at +70 with rated voltage applied.<br>在+70 環境下,以額定電壓連續操作 48 小時。<br>2. Intermittent life test 室溫壽命測試(間歇)<br>A duty cycle of 1 minute on, 1 minutes off, a minimum of 5000 times at room temp.( +25±2 )and rated voltage applied.<br>在室溫下(+25±2 ), 以額定電壓操作, 通電 1 分鐘斷電 1 分鐘,測試 5000 次循環。 | Being placed for 4 hours at +25 , buzzer shall be measured. The value of oscillation frequency/ current consumption should be in ±10% compared with initial ones .The SPL should be in ±10dB compared with initial one.<br>經測試後, 靜置於+25 (室溫) 環境中 4 小時後,諧振頻率與消耗電流變化量須在±10%內. 輸出音壓變化量須在±10dB 內。 |

### TEST CONDITION.

|                                     |   |                           |                      |                            |
|-------------------------------------|---|---------------------------|----------------------|----------------------------|
| Standard Test Condition<br>一般測試條件   | : | a) Temperature : +5 ~ +35 | b) Humidity : 45-85% | c) Pressure : 860-1060mbar |
| Judgement Test Condition<br>爭議時測試條件 | : | a) Temperature : +25 ± 2  | b) Humidity : 60-70% | c) Pressure : 860-1060mbar |

## I. PACKING STANDARD 包裝規格

