



SCHTTKY BARRIER RECTIFIER

SRB2020C THRU SRB20100C


VOLTAGE RANGE 20 to 100 Volts
CURRENT 20.0 Ampere

FEATURES

- Plastic package has Underwriters Laboratory Flammability Classification 94V-O utilizing Flame Retardant Epoxy Molding Compound
- Exceeds environmental standards of MIL-S-19500/228
- Low power loss,high efficiency
- Low forward voltage,high current capability
- High surge capacity
- For use in low voltage, high frequency inverters
- Free wheeling, and polarity protection applications

MECHANICAL DATA

- Case: D² -PAK/TO-263AB Molded Plastic
- Terminals: Lead solderable per MIL-STD-202, Method 208
- Polarity: as marked
- Mounting position: Any
- Weight: 0.06ounce, 1.7grams

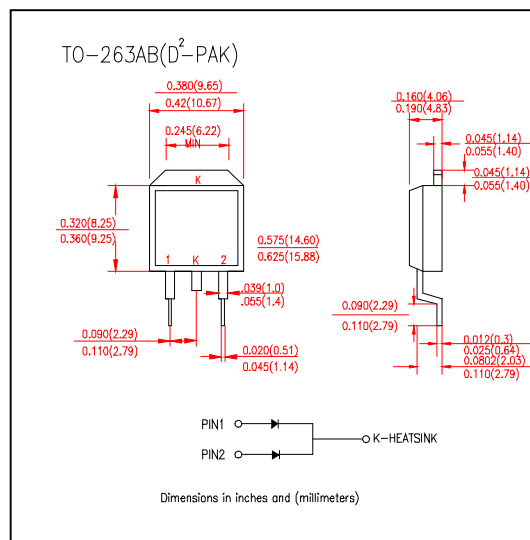

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

- Ratings at 25°C ambient temperature unless otherwise specified
- Single Phase, half wave, 60Hz, resistive or inductive load
- For capacitive load derate current by 20%

	SYMBOLS	SRB 2020C	SRB 2030C	SRB 2035C	SRB 2040C	SRB 2045C	SRB 2050C	SRB 2060C	SRB 2080C	SRB 20100C	UNIT
Maximum Repetitive Peak Reverse Voltage	V _{RRM}	20	30	35	40	45	50	60	80	100	Volts
Maximum RMS Voltage	V _{RMS}	14	21	25	28	32	35	42	56	70	Volts
Maximum DC Blocking Voltage	V _{DC}	20	30	35	40	45	50	60	80	100	Volts
Maximum Average Forward Rectified Current at T _c =90°C	I _(AV)	20.0									Amps
Peak Forward Surge Current 8.3ms single half sine wave superimposed on rated load (JEDEC method)	I _{FSM}	150									Amps
Maximum Forward Voltage per at10.0A per element	V _F	0.65			0.75			0.85			Volts
Maximum DC Reverse Current at rated DC Blocking Voltage per element	I _R	0.5									mA
		100									
Typical Junction Capacitance(Note3)	C _J	500									pF
Typical Thermal Resistance (Note 1)	R _{θJC}	3.0									°C/W
Operating and Storage Temperature Range	T _J T _{STG}	(-55 to +150)									°C

Notes:

1. Thermal Resistance Junction to CASE
2. Measured at V_R=4v and f=1MHz



SCHTTKY BARRIER RECTIFIER

SRB2020C THRU SRB20100C

VOLTAGE RANGE 20 to 100 Volts
CURRENT 20.0 Ampere

RATING AND CHARACTERISTIC CURVES SRB2020C THRU SRB20100C

FIG.1-TYPICAL FORWARD CURRENT DERATING CURVE

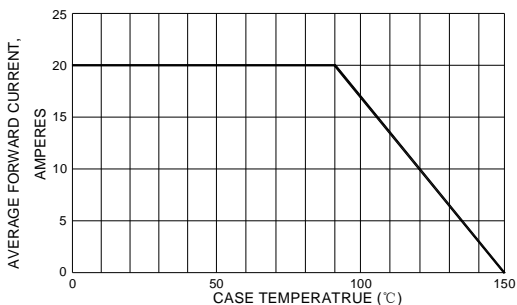


FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTIC

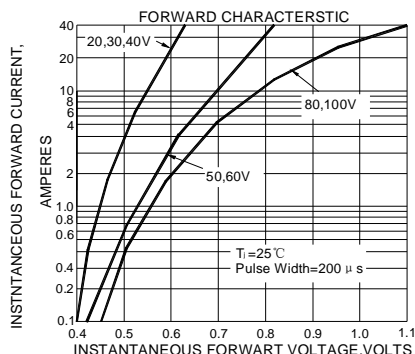


FIG.2-TYPICAL REVERSE CHARACTERISTICS

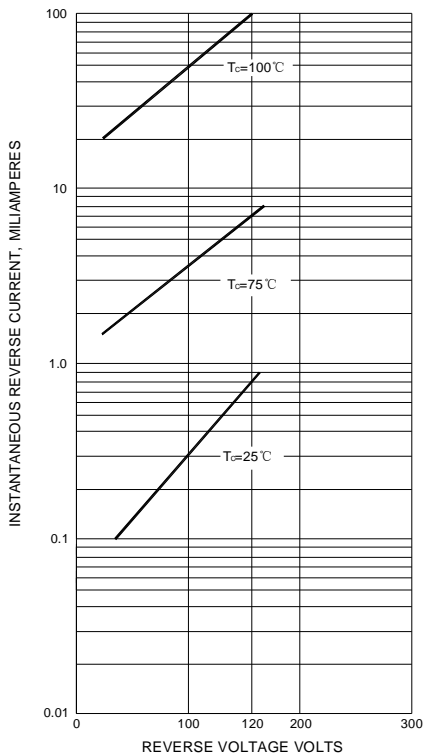


FIG.4-MAXIMUM NON-REPETITIVE SURGE CURRENT

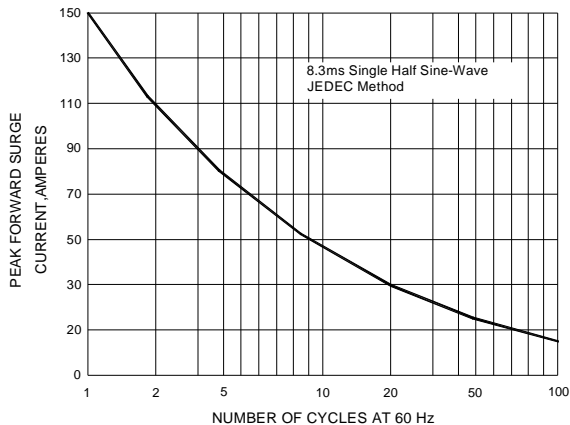


FIG.5-TYPICAL JUNCTION CAPACITANCE

