

Surface Mount RF Transformer

50Ω

40 to 300 MHz

TX16-R3T+ TX16-R3T



CASE STYLE: TT240
PRICE: \$4.50 ea. QTY (25-49)

+ RoHS compliant in accordance
with EU Directive (2002/95/EC)

The +Suffix identifies RoHS Compliance. See our web site
for RoHS Compliance methodologies and qualifications.

Maximum Ratings


Operating Temperature	-20°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power	250mW
DC Current	30mA

Permanent damage may occur if any of these limits are exceeded.

Pin Connections

PRIMARY DOT	4
PRIMARY	6
SECONDARY DOT	3
SECONDARY	1
SECONDARY CT	2
NOT USED	5


Outline Drawing

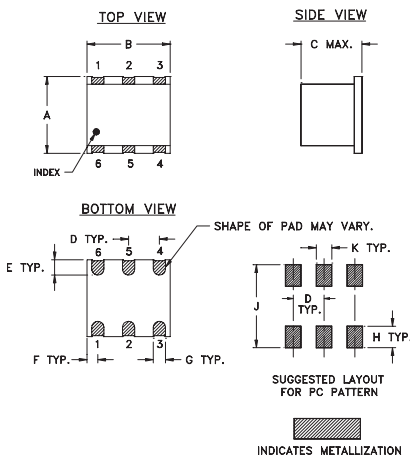

Outline Dimensions (inch/mm)

A	B	C	D	E	F	
.250	.31	.20	.100	.050	.055	
6.35	7.87	5.08	2.54	1.27	1.40	
G	H	J	K			wt
.040	.070	.270	.050			grams
1.02	1.78	6.86	1.27			0.50

Config. A



Features

- wideband, 40 to 300 MHz
- high impedance ratio 16:1
- leadless surface mount

Applications

- impedance matching of amplifiers
- push-pull amplifiers
- VHF/UHF receivers/transmitters

Transformer Electrical Specifications


Ω RATIO	FREQUENCY (MHz)	INSERTION LOSS*		
		3 dB MHz	2 dB MHz	1 dB MHz
16	40-300	40-300	60-220	70-150

* Insertion Loss is referenced to mid-band loss, 0.8 dB typ.


Typical Performance Data

FREQUENCY (MHz)	INSERTION LOSS (dB)	INPUT R. LOSS (dB)
40.00	0.78	10.69
45.00	0.81	12.21
60.00	0.91	15.24
65.00	0.94	15.89
70.00	0.96	16.23
110.00	1.13	12.90
150.00	1.44	9.60
185.00	1.58	7.74
220.00	2.00	6.29
300.00	2.74	4.30

TX16-R3T
INSERTION LOSS

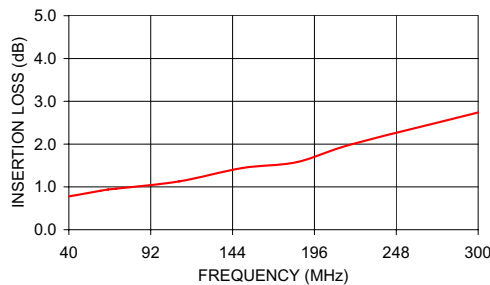

TX16-R3T
INPUT RETURN LOSS

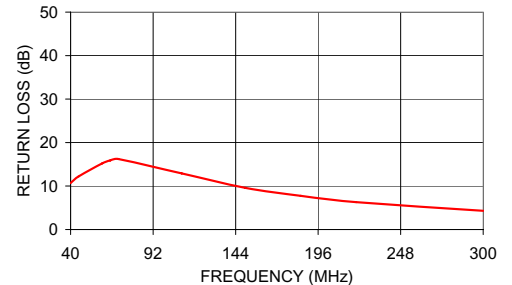

Mini-Circuits
ISO 9001 ISO 14001 AS 9100 CERTIFIED

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine www.minicircuits.com Provides ACTUAL Data Instantly at minicircuits.com

For detailed performance specs
& shopping online see web site

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

REV. OR
M95920
TX16-R3T
IG/TD/CP
070920