





Small-Signal Diodes

SOD-123

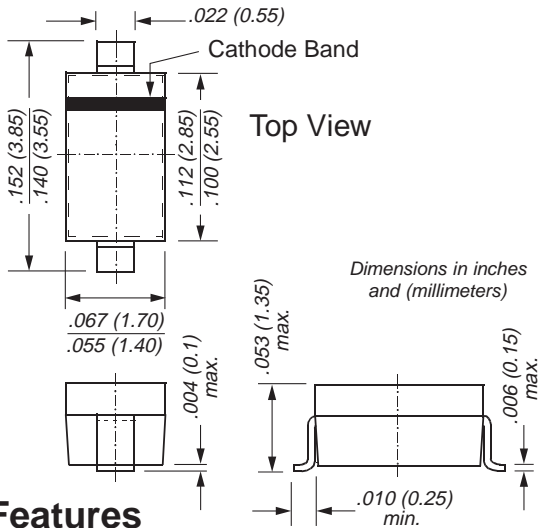

Mounting Pad Layout

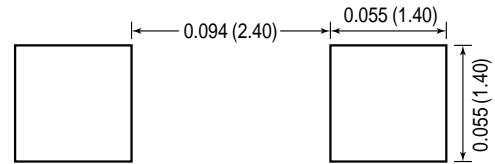

Features

- Silicon Epitaxial Planar Diodes
- For general purpose
- These diodes are also available in other case styles including: the DO-35 case with the type designations BAV19 to BAV21, the MiniMELF case with the type designations BAV100 to BAV103, the SOT-23 case with the type designations BAS19 to BAS21, and the SOD-323 case with type designations BAV19WS to BAV21WS.

Mechanical Data

Case: DO-35 Glass Case

Weight: approx. 0.01g

Marking BAV19W = A8

Code: BAV20W = A9

BAV21W = AA

Packaging Codes/Options:

D3/10K per 13" reel (8mm tape), 30K/box

D4/3K per 7" reel (8mm tape), 30K/box

Maximum Ratings and Thermal Characteristics (T_A = 25°C unless otherwise noted)

Parameter	Symbol	Value	Unit	
Continuous Reverse Voltage	BAV19W BAV20W BAV21W	V _R	100 150 200	V
Repetitive Peak Reverse Voltage	BAV19W BAV20W BAV21W	V _R RM	120 200 250	V
Forward DC Current at T _{amb} = 25°C	I _F	250 ⁽¹⁾	mA	
Rectified Current (Average) Half Wave Rectification with Resist. Load at T _{amb} = 25°C and f ≥ 50Hz	I _{F(AV)}	200 ⁽¹⁾	mA	
Repetitive Peak Forward Current at f ≥ 50Hz, Θ = 180°, T _{amb} = 25°C	I _F RM	625 ⁽¹⁾	mA	
Surge Forward Current at t < 1s, T _j = 25°C	I _F SM	1	A	
Power Dissipation at T _{amb} = 25°C	P _{tot}	410 ⁽¹⁾	mW	
Thermal Resistance Junction to Ambient Air	R _{θJA}	375 ⁽¹⁾	°C/W	
Junction Temperature	T _j	150 ⁽¹⁾	°C	
Storage Temperature Range	T _S	-65 to +150 ⁽¹⁾	°C	

Note: (1) Valid provided that leads are kept at ambient temperature.

BAV19W thru BAV21W



Vishay Semiconductors
formerly General Semiconductor


Ratings and Characteristic Curves ($T_A = 25^\circ\text{C}$ unless otherwise noted)

Electrical Characteristics ($T_J = 25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Test Condition	Min	Typ	Max	Unit
Forward Voltage	V_F	$I_F = 100\text{mA}$ $I_F = 200\text{mA}$	— —	— —	1.00 1.25	V
Leakage Current	I_R	$V_R = 100\text{V}$ $V_R = 100\text{V}, T_j = 100^\circ\text{C}$ $V_R = 150\text{V}$ $V_R = 150\text{V}, T_j = 100^\circ\text{C}$ $V_R = 200\text{V}$ $V_R = 200\text{V}, T_j = 100^\circ\text{C}$	— — — — — —	— — — — — —	100 15 100 15 100 15	nA μA nA μA nA μA
Dynamic Forward Resistance	r_f	$I_F = 10\text{mA}$	—	5	—	Ω
Capacitance	C_{tot}	$V_R = 0, f = 1\text{MHz}$	—	1.5	—	pF
Reverse Recovery Time	t_{rr}	$I_F = 30\text{mA}, I_R = 30\text{mA}$ $I_{rr} = 3\text{mA}, R_L = 100\Omega$	—	—	50	ns


Ratings and Characteristic Curves ($T_A = 25^\circ\text{C}$ unless otherwise noted)

Forward characteristics

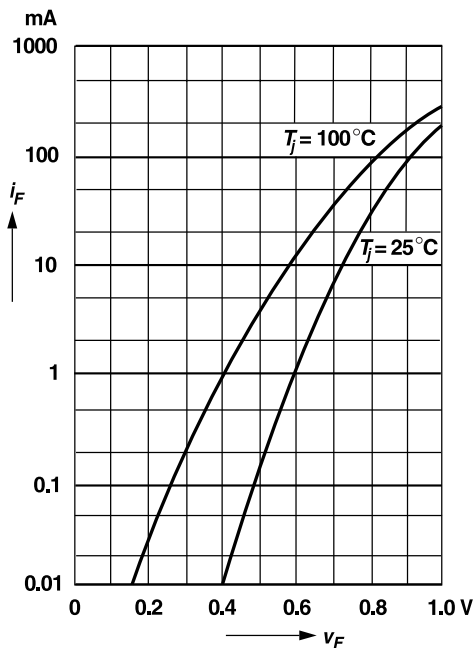

Admissible forward current versus ambient temperature

Valid provided that electrodes are kept at ambient temperature

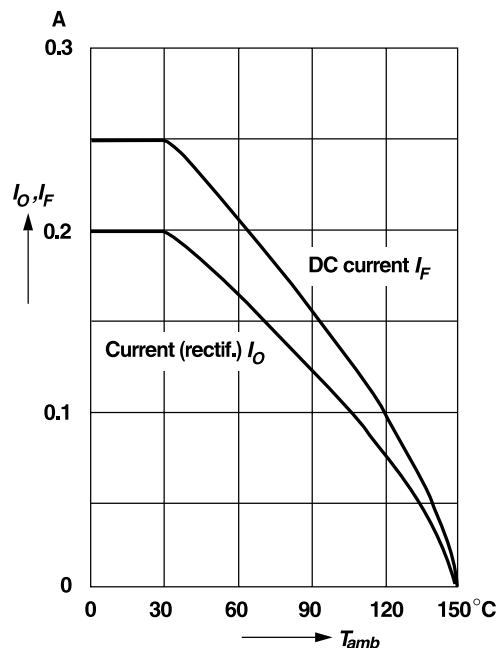





Ratings and Characteristic Curves ($T_A = 25^\circ\text{C}$ unless otherwise noted)

Admissible power dissipation versus ambient temperature


Valid provided that electrodes are kept at ambient temperature

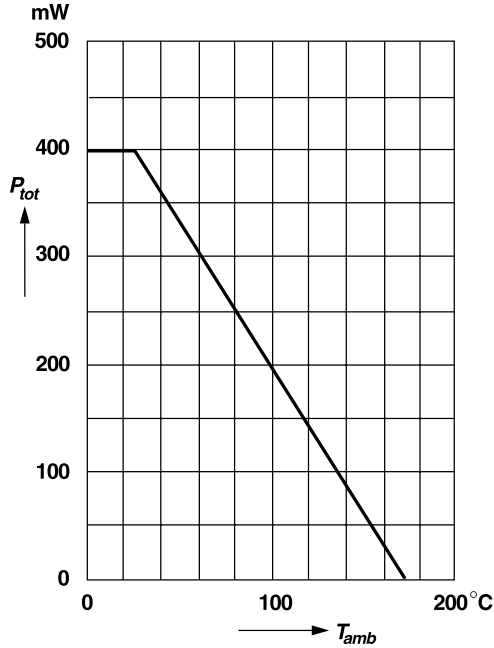


Leakage current versus junction temperature

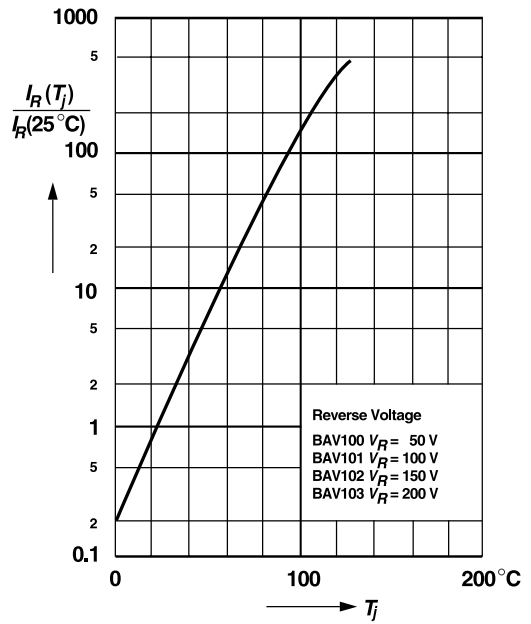

Dynamic forward resistance versus forward current

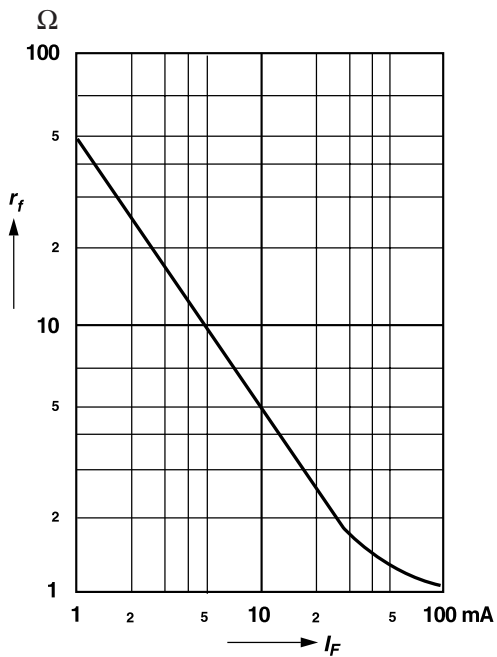

Capacitance versus reverse voltage

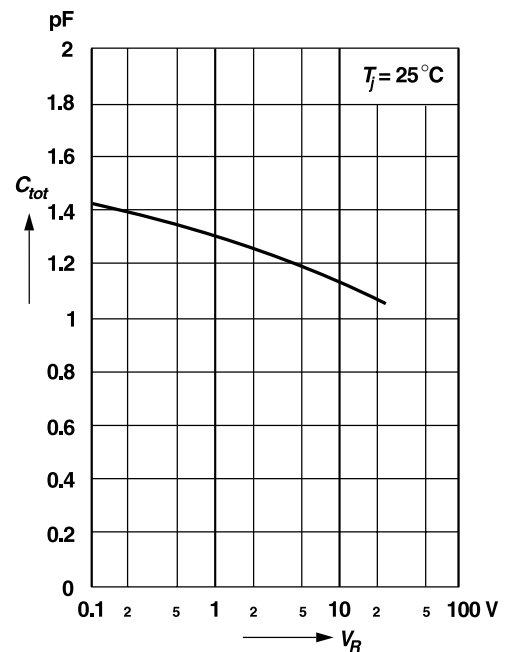



Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.