


Thin Film Chip Inductor




FEATURES

- Tight tolerance
- Self-resonant frequency controlled within 10 %
- Stable inductance over high frequencies
- Compatible with reflow or flow soldering
- 100 % lead (Pb)-free and RoHS compliant
- Temperature range: - 40 °C to + 125 °C (no load)
- 40 °C to + 85 °C (full rated current)


RoHS
COMPLIANT

DIMENSIONS in inches [millimeters]

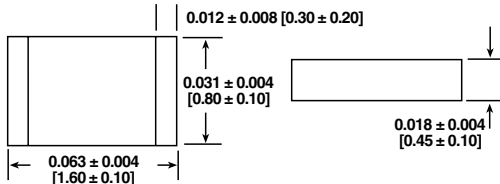



APPLICATIONS

- Cellular telephone, pagers and GPS products
- Wireless LAN and other communication appliances
- VCO, TCXO circuit and RF transceiver module

STANDARD ELECTRICAL SPECIFICATIONS

L 500 MHz (nH)	L TOL.	Q 100 MHz (Typ.)	Q 800 MHz (Typ.)	Q 1700 MHz (Typ.)	SRF MHz (Typ.)	DCR Ohms (Max.)	RATED DC CURRENT (mA)
1.0	0.3 nH	13	34	49	13 000	0.35	800
1.2	0.3 nH	13	34	49	13 000	0.35	800
1.5	0.3 nH	13	34	49	10 000	0.35	800
1.8	0.3 nH	13	34	49	10 000	0.35	300
2.2	0.3 nH	13	34	49	8000	0.35	300
2.7	0.3 nH	13	34	49	6000	0.45	300
3.3	0.3 nH	13	34	49	6000	0.45	300
4.0	0.3 nH	13	34	49	6000	0.45	300
4.7	0.3 nH	13	34	41	5000	0.55	300
5.6	0.3 nH	13	34	41	5000	0.65	300
6.8	0.3 nH	13	34	41	5000	0.75	300
8.2	0.3 nH	13	34	41	4000	0.95	300
10	0.3 nH	13	34	30	4000	0.95	300
12	0.3 nH	13	34	30	3000	1.05	300
15	0.3 nH	13	30	30	3000	1.35	300
18	0.3 nH	13	30	25	2000	1.65	300
22	0.3 nH	13	30	25	2000	1.95	250
27	0.3 nH	10	45	25	2000	2.35	250
33	0.3 nH	10	45	6	1500	2.75	250
40	0.3 nH	10	45	1	1500	3.0	200
47	0.3 nH	10	45	1	1500	3.0	200
56	0.3 nH	10	26	4	1000	5.0	150
68	0.3 nH	10	26	6	1000	5.0	150

PERFORMANCE GRAPHS: INDUCTANCE AND Q VS FREQUENCY

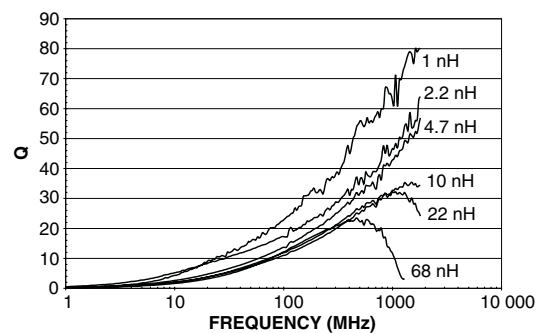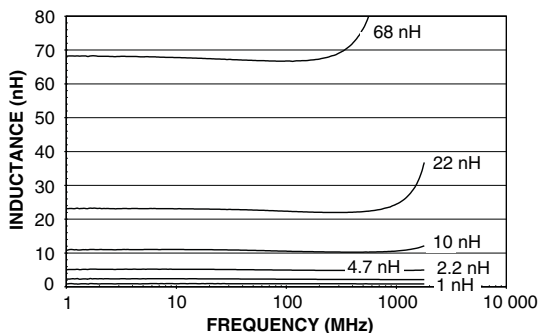

DESCRIPTION

IFCB-0603 **10 nH** **± 5 %** **ER** **e3**
 MODEL INDUCTANCE VALUE INDUCTANCE TOLERANCE PACKAGE CODE JEDEC LEAD (Pb)-FREE STANDARD

GLOBAL PART NUMBER

I F C B 0 6 0 3 E R 1 0 N J
 PRODUCT FAMILY SIZE PACKAGE CODE INDUCTANCE VALUE TOL.



Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.