

**INTRODUCTION**

The MF series Metal Film Resistors are manufactured by vacuum deposition of multiple layers of metal film on high thermal conductive ceramic rods and are coated with layers of lacquer.


**FEATURES**

- Low Temperature Coefficient Resistance.
- Wide Resistance Range.
- Tight Tolerance.
- Precision Performance Characteristics.
- Lead Free

**RATINGS**

Type	MF 50	MF 55	MF55SS	MF 60	MF60SS	MF 65	MF 70
Rated Power at 70°C	1/6W	1/4W	0.4W	1/2W	0.6W	1W	2W
Operating Temp. Range	-55°C to +155°C						
Derated to 0 Load at	+155°C						
Maximum Working Voltage	200V	250V	200V	350V	250V	500V	500V
Maximum Overload Voltage	400V	500V	400V	700V	500V	700V	1000V
Resistance Range							
1% E-96, E-24	1Ω-10MΩ	1Ω-10MΩ	1Ω-10MΩ	1Ω-10MΩ	1Ω-10MΩ	1Ω-10MΩ	1Ω-10MΩ
5%, E-24							
Temperature Coefficient	50ppm/°C	50ppm/°C	50ppm/°C	50ppm/°C	50ppm/°C	50ppm/°C	50ppm/°C

**DIMENSIONS**

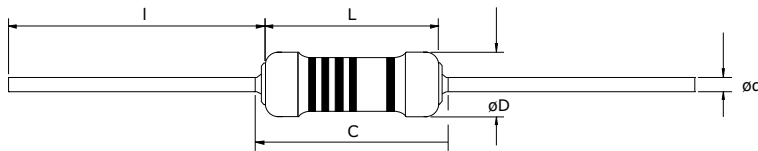


Type	DIMENSIONS (Millimeters)				
	L	C	D	l	d
MF50/MF55SS	3.30± 0.4	4.1 Max	1.70± 0.2	28.0± 3.0	0.45± 0.05
MF55/MF60SS	6.35± 0.5	7.1 Max	2.30± 0.3	28.0± 3.0	0.60± 0.05
MF 60	9.00± 0.5	11.8 Max	3.20± 0.5	28.0± 3.0	0.60± 0.05
MF 65	12.00± 1.0	15.0 Max	4.50± 0.5	35.0± 3.0	0.80± 0.05
MF 70	16.00± 1.0	22.0 Max	5.00± 0.5	35.0± 3.0	0.80± 0.05

**PERFORMANCE CHARACTERISTICS**

Performance Test	Test Method	Specification
DC Resistance	MIL-STD-202F, Method 303	± 1% Tolerance
Resistance Temperature Coefficient	MIL-STD-202F, Method 304	± 50ppm/°C
Short Time Overload	MIL-R-55342E, Sect. 4.7.5	± (0.5% + 0.05Ω)
Dielectric Withstanding Voltage	MIL-STD-202F, Method 301	± (0.5% + 0.05Ω) No Mechanical Damage
Insulation Resistance	MIL-STD-202F, Method 302	>10 <sup>4</sup> MΩ
Current Noise	MIL-STD-202F, Method 308	<0.3μ v/v
Solderability	MIL-STD-202F, Method 208	>95% coverage
Resistance to Soldering Heat	MIL-R-55342E, Sect. 4.7.7	± (0.5% + 0.05Ω)
Robustness of electrode (Terminal Strength)	MIL-STD-202F, Method 211	± (0.25% + 0.05Ω) No Mechanical Damage
Resistance to Solvents	MIL-STD-202F, Method 215	No Damage to lacquer & colour coding
Moisture Resistance	MIL-STD-202F, Method 106	± (0.5% + 0.05Ω)
Temperature Cycling	MIL-STD-883F, Method 1010.7	± (0.5% + 0.05Ω)
Low Temperature Operation	MIL-R-55342E, Sect. 4.7.4	± (0.5% + 0.05Ω)
High Temperature Exposure	MIL-R-55342E, Sect. 4.7.6	± (1.0% + 0.1Ω)
Thermal Shock	MIL-STD-202F, Method 107	± (0.5% + 0.1Ω)
Loadlife	MIL-STD-202F, Method 108	± (1.0% + 0.1Ω)

**DERATING CURVE**

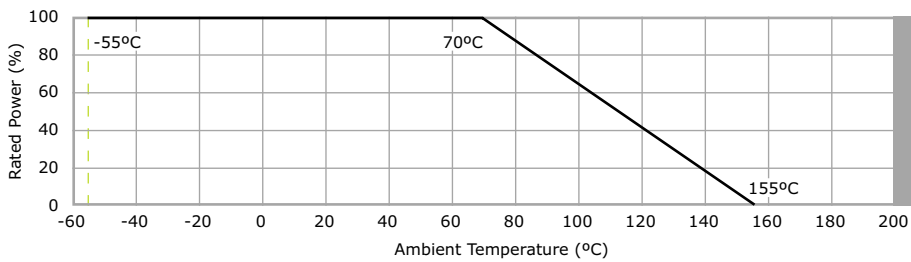

**ORDERING CODE**

