
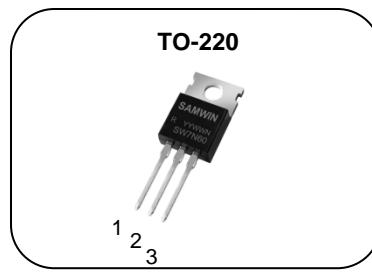


N-channel TO-220 MOSFET**Features**

- High ruggedness
- $R_{DS(ON)}$ (Max 1.25Ω) @ $V_{GS}=10V$
- Gate Charge (Typical 19nC)
- Improved dv/dt Capability
- 100% Avalanche Tested

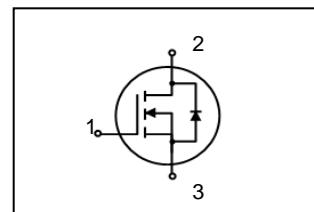

BV_{DSS} : 600V
I_D : 7A
R_{DS(ON)} : 1.25Ω

**General Description**

This power MOSFET is produced with advanced VDMOS technology of SAMWIN. This technology enable power MOSFET to have better characteristics, such as fast switching time, low on resistance, low gate charge and especially excellent avalanche characteristics. This power MOSFET is usually used at high efficient DC to DC converter block and switch mode power supply.

Order Codes

Item	Sales Type	Marking	Package	Packaging
1	SW P 7N60	SW7N60R	TO-220	TUBE

Absolute maximum ratings

Symbol	Parameter	Value	Unit
V_{DSS}	Drain to Source Voltage	600	V
I_D	Continuous Drain Current (@ $T_C=25^\circ C$)	7*	A
	Continuous Drain Current (@ $T_C=100^\circ C$)	4.4*	A
I_{DM}	Drain current pulsed (note 1)	28	A
V_{GS}	Gate to Source Voltage	± 30	V
E_{AS}	Single pulsed Avalanche Energy (note 2)	453	mJ
E_{AR}	Repetitive Avalanche Energy (note 1)	117	mJ
dv/dt	Peak diode Recovery dv/dt (note 3)	5	V/ns
P_D	Total power dissipation (@ $T_C=25^\circ C$)	23.8	W
	Derating Factor above 25°C	0.2	W/°C
T_{STG}, T_J	Operating Junction Temperature & Storage Temperature	-55 ~ + 150	°C
T_L	Maximum Lead Temperature for soldering purpose, 1/8 from Case for 5 seconds.	300	°C

*. Drain current is limited by junction temperature.

Thermal characteristics

Symbol	Parameter	Value	Unit
R_{thjc}	Thermal resistance, Junction to case	5.3	°C/W
R_{thcs}	Thermal resistance, Case to Sink		°C/W
R_{thja}	Thermal resistance, Junction to ambient	48.2	°C/W

Electrical characteristic ($T_C = 25^\circ\text{C}$ unless otherwise specified)

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
Off characteristics						
BV_{DSS}	Drain to source breakdown voltage	$V_{\text{GS}}=0\text{V}, I_D=250\mu\text{A}$	600			V
$\Delta \text{BV}_{\text{DSS}} / \Delta T_J$	Breakdown voltage temperature coefficient	$I_D=250\mu\text{A}$, referenced to 25°C		0.78		$^\circ\text{C}$
I_{DSS}	Drain to source leakage current	$V_{\text{DS}}=600\text{V}, V_{\text{GS}}=0\text{V}$			1	μA
		$V_{\text{DS}}=480\text{V}, T_C=125^\circ\text{C}$			50	μA
I_{GSS}	Gate to source leakage current, forward	$V_{\text{GS}}=30\text{V}, V_{\text{DS}}=0\text{V}$			100	nA
	Gate to source leakage current, reverse	$V_{\text{GS}}=-30\text{V}, V_{\text{DS}}=0\text{V}$			-100	nA
On characteristics						
$V_{\text{GS(TH)}}$	Gate threshold voltage	$V_{\text{DS}}=V_{\text{GS}}, I_D=250\mu\text{A}$	2		4	V
$R_{\text{DS(ON)}}$	Drain to source on state resistance	$V_{\text{GS}}=10\text{V}, I_D=3.5\text{A}$		0.9	1.25	Ω
G_f	Forward Transconductance	$V_{\text{DS}}=30\text{V}, I_D=3.5\text{A}$		4.5		S
Dynamic characteristics						
C_{iss}	Input capacitance	$V_{\text{GS}}=0\text{V}, V_{\text{DS}}=25\text{V}, f=1\text{MHz}$		943		pF
C_{oss}	Output capacitance			110		
C_{rss}	Reverse transfer capacitance			1.7		
$t_{d(\text{on})}$	Turn on delay time	$V_{\text{DS}}=300\text{V}, I_D=7\text{A}, R_G=25\Omega$ (note 4, 5)		15		ns
t_r	Rising time			27		
$t_{d(\text{off})}$	Turn off delay time			43		
t_f	Fall time			29		
Q_g	Total gate charge	$V_{\text{DS}}=480\text{V}, V_{\text{GS}}=10\text{V}, I_D=7\text{A}$ (note 4, 5)		19		nC
Q_{gs}	Gate-source charge			6		
Q_{gd}	Gate-drain charge			6		

Source to drain diode ratings characteristics

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
I_s	Continuous source current	Integral reverse p-n Junction diode in the MOSFET			7	A
I_{SM}	Pulsed source current				28	A
V_{SD}	Diode forward voltage drop.	$I_s=7\text{A}, V_{\text{GS}}=0\text{V}$			1.5	V
T_{rr}	Reverse recovery time	$I_s=7\text{A}, V_{\text{GS}}=0\text{V},$ $dI_F/dt=100\text{A}/\mu\text{s}$		330		ns
Q_{rr}	Reverse recovery Charge			3.2		μC

※. Notes

- Repetitive rating : pulse width limited by junction temperature.
- $L = 18.5\text{mH}, I_{AS} = 7\text{A}, V_{DD} = 100\text{V}, R_G = 25\Omega$, Starting $T_J = 25^\circ\text{C}$
- $I_{SD} \leq 7\text{A}, dI/dt = 100\text{A}/\mu\text{s}, V_{DD} \leq \text{BV}_{\text{DSS}}$, Starting $T_J = 25^\circ\text{C}$
- Pulse Test : Pulse Width $\leq 300\mu\text{s}$, duty cycle $\leq 2\%$
- Essentially independent of operating temperature.

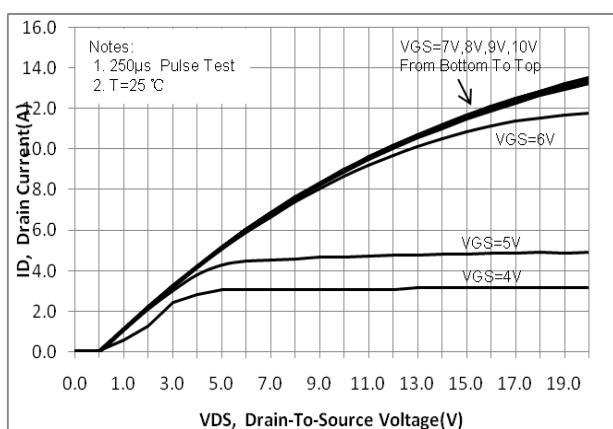
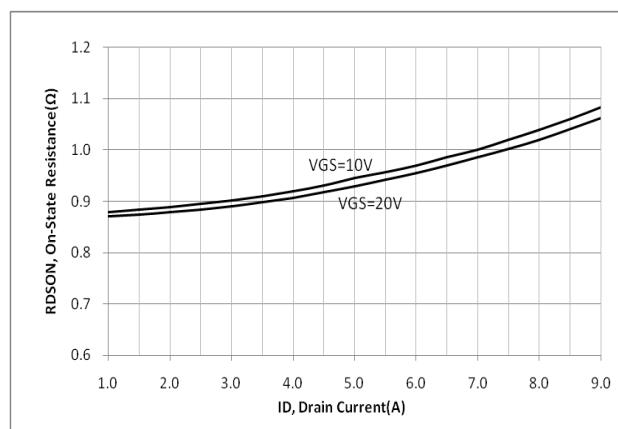
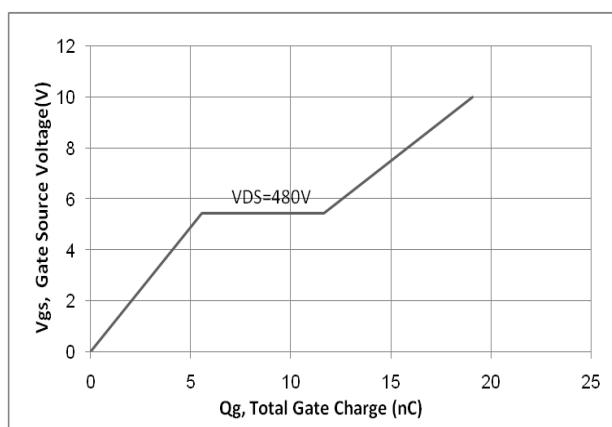
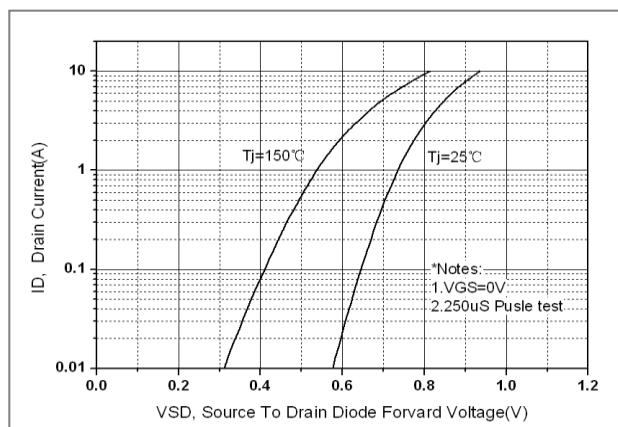
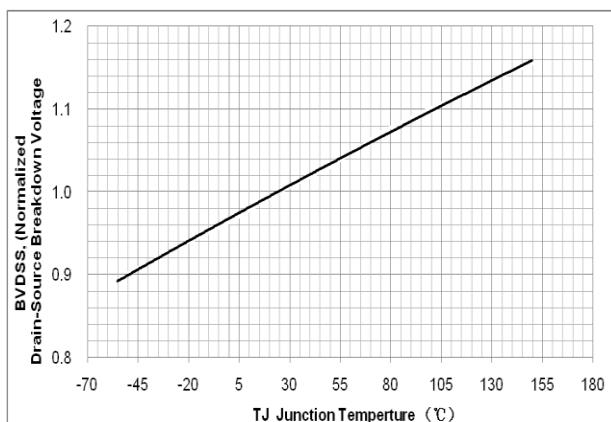
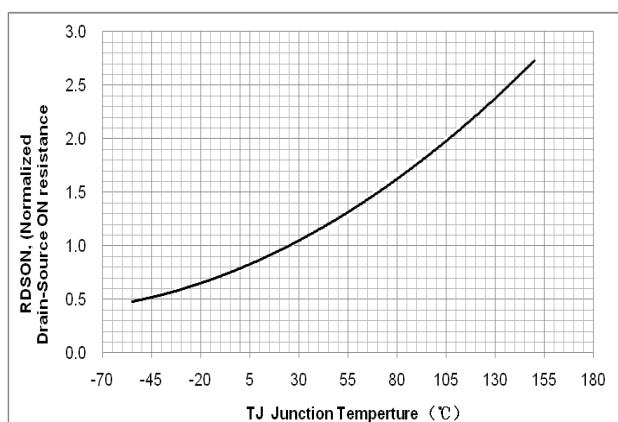
Fig. 1. On-state characteristics**Fig. 2. On-resistance variation vs. drain current and gate voltage****Fig. 3. Gate charge characteristics****Fig. 4. On state current vs. diode forward voltage****Fig 5. Breakdown Voltage Variation vs. Junction Temperature****Fig. 6. On resistance variation vs. junction temperature**

Fig. 7. Maximum safe operating area

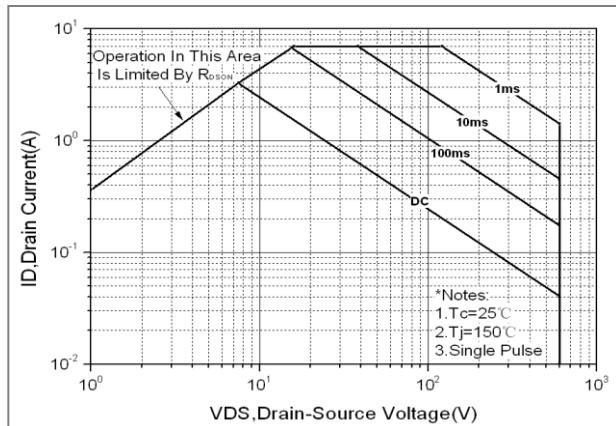


Fig. 8. Transient thermal response curve

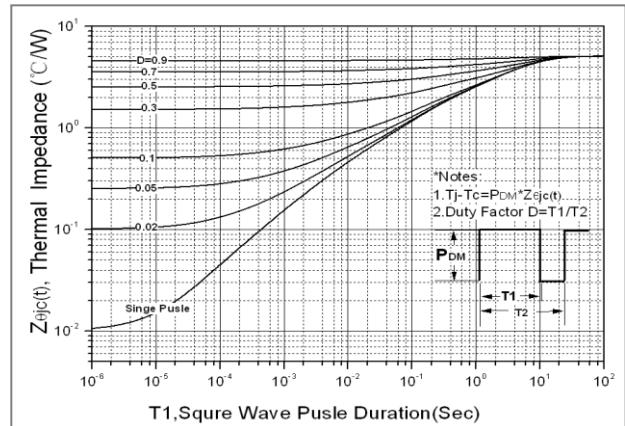


Fig. 9. Capacitance Characteristics

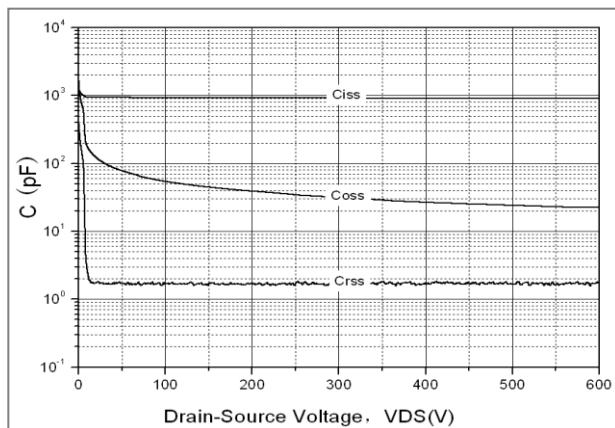


Fig. 10. Gate charge test circuit & waveform

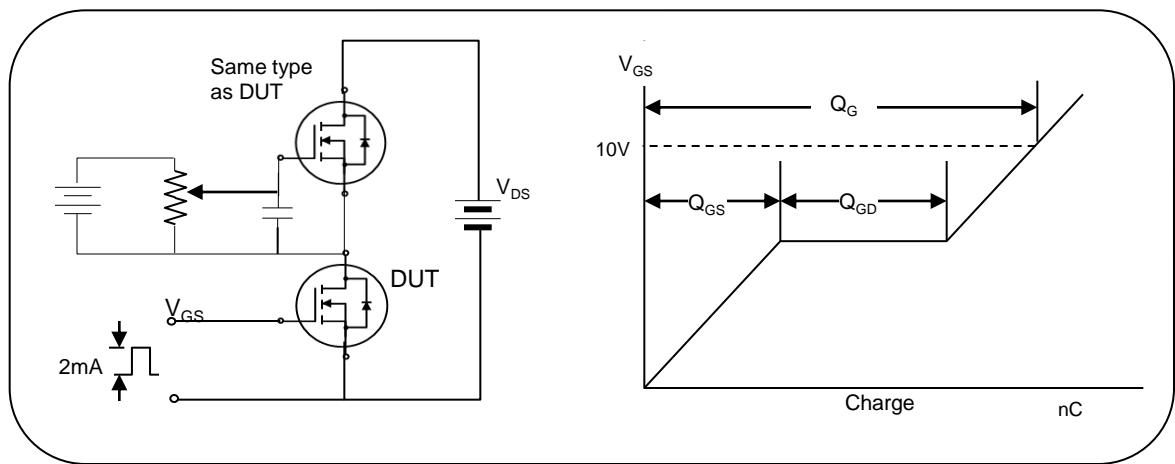


Fig. 11. Switching time test circuit & waveform

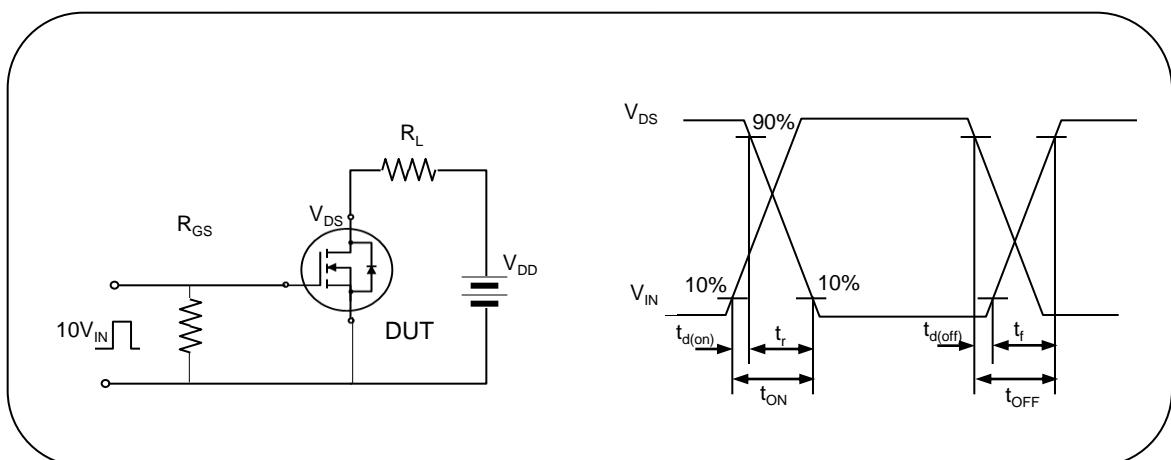


Fig. 12. Unclamped Inductive switching test circuit & waveform

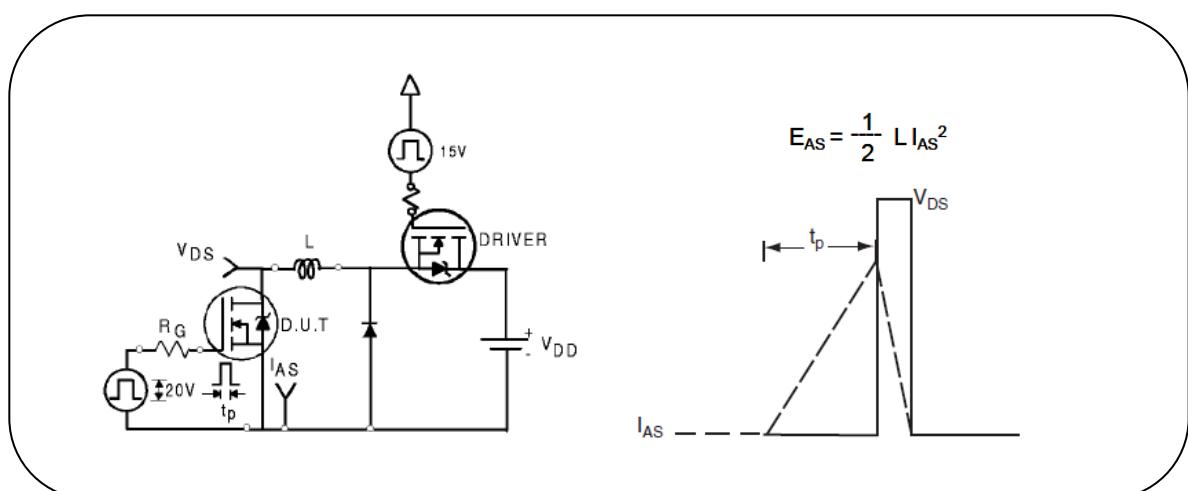


Fig. 13. Peak diode recovery dv/dt test circuit & waveform

