

1W, Fixed input voltage , isolated & regulated single output



Continuous Short Circuit Protection

Patent Protection RoHS

## FEATURES

- | Efficiency up to 75%
- | Isolation voltage: 3K VDC
- | Operating temperature range: -40°C to +85°C
- | Miniature SMD package
- | Surface mounted design
- | No external components
- | International standard pin-out

*IF\_XT-1WR2 series is specially designed for applications where an isolated voltage is required in a distributed power supply system. It is suitable for:*

1. Where the voltage of the input power supply is stable (voltage variation:  $\pm 5\% \text{Vin}$ );
2. Where isolation is necessary between input and output (isolation voltage  $\leq 3000 \text{VDC}$ );
3. Where has high requirement of line regulation, load regulation and the ripple & noise of the output voltage.

## Selection Guide

Part No.	Input Voltage (VDC)	Output		Efficiency (% Min./Typ.) @ Full Load	Max. Capacitive Load ( $\mu\text{F}$ )
	Nominal (Range)	Output Voltage (VDC)	Output Current (mA) (Max./Min.)		
IF0503XT-1WR2	5 (4.75-5.25)	3.3	243/25	54/58	220
IF0505XT-1WR2		5	200/20	68/72	
IF0512XT-1WR2		12	83/9	69/73	
IF0515XT-1WR2		15	67/7	70/74	
IF1205XT-1WR2	12 (11.4-12.6)	5	200/20	69/73	
IF1212XT-1WR2		12	83/9	69/73	
IF2405XT-1WR2	24 (22.8-25.2)	5	200/20	69/73	
IF2412XT-1WR2		12	83/9	69/73	

## Input Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Input Current (full load / no-load)	5V input	--	270/15	--	mA
	12V input	--	115/10	--	
	24V input	--	56/7	--	
Surge Voltage (1sec. max.)	5V input	-0.7	--	9	VDC
	12V input	-0.7	--	18	
	24V input	-0.7	--	30	
Reflected Ripple Current		--	15	--	mA
Input Filter					Capacitance Filter

## Output Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Output Voltage Accuracy	100% load	--	--	$\pm 3$	%
Line Regulation	Input voltage change: $\pm 1\%$	--	--	$\pm 0.25$	
Load Regulation	10%-100% load	3.3VDC output	--	3	
		Other output	--	2	
Ripple*	20MHz bandwidth	--	10	--	mVp-p
Noise*		--	50	--	
Temperature Coefficient	100% load	--	--	$\pm 0.03$	%/°C
Short Circuit Protection				Continuous, self-recovery	

Note: \* Ripple and noise tested with "parallel cable" method, please see DC-DC Converter Application Notes for specific operation methods.

### General Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit	
Isolation Voltage	Input-output, with the test time of 1 minute and the leak current lower than 1mA	3000	--	--	VDC	
Isolation Resistance	Input-output, isolation Voltage 500VDC	1000	--	--	MΩ	
Isolation Capacitance	Input-output, 100KHz/0.1V	--	20	--	pF	
Operating Temperature	Derating when operating temperature up to 71°C, (see Fig. 1)	-40	--	85	°C	
Storage Temperature		-55	--	125		
Casing Temperature Rise	T <sub>a</sub> =25°C	--	25	--		
Pin Welding Resistance Temperature	Welding spot is 1.5mm away from the casing, 10	--	--	300		
Reflow Soldering Temperature		Peak temp.≤245°C , maximum duration time≤60s at 217°C. For actual application, please refer to IPC/JEDEC J-STD-020D.1.				
Storage Humidity	Non-condensing	--	--	95	%	
Switching Frequency	100% load, nominal input voltage	--	100	300	KHz	
MTBF	MIL-HDFK-217F@25°C	3500	--	--	K hours	

### Physical Specifications

Casing Material	Black flame-retardant heat-proof epoxy resin (UL94-V0)
Package Dimensions	15.24*11.20*7.25mm
Weight	2.0g(Typ.)
Cooling Method	Free air convection

### EMC Specifications

EMI	Conducted disturbance	CISPR22/EN55022	CLASS B (see Fig. 3 for recommended circuit)
	Radiated emission	CISPR22/EN55022	CLASS B (see Fig. 3 for recommended circuit)
EMS	Electrostatic discharge	IEC/EN61000-4-2	Contact ±6KV perf. Criteria B

### Product Characteristic Curve

Temperature Derating Graph



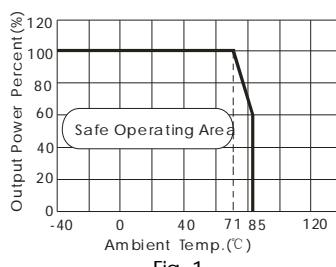




Fig. 1

Efficiency Vs Input Voltage(Full Load)

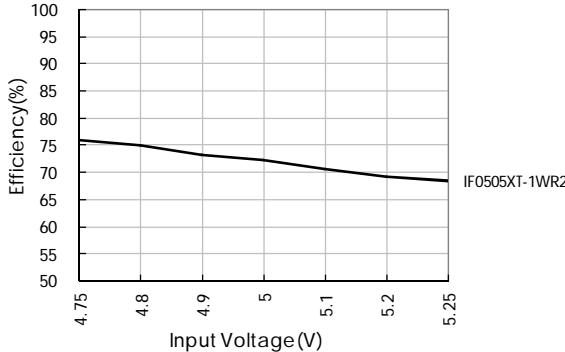

Efficiency Vs Output Load(Vin=Vin-nominal)

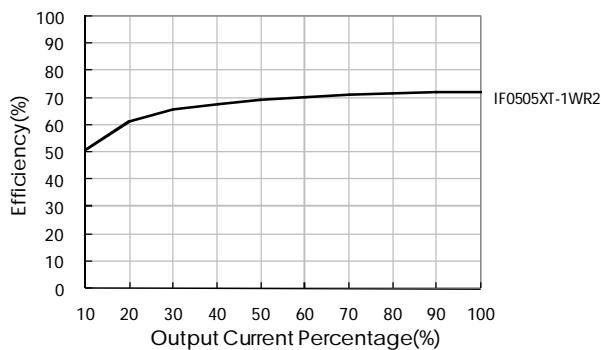


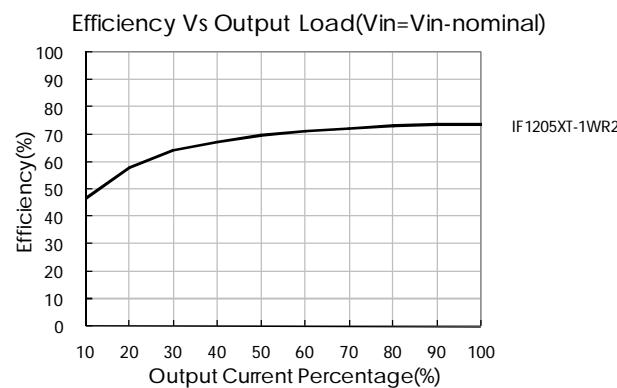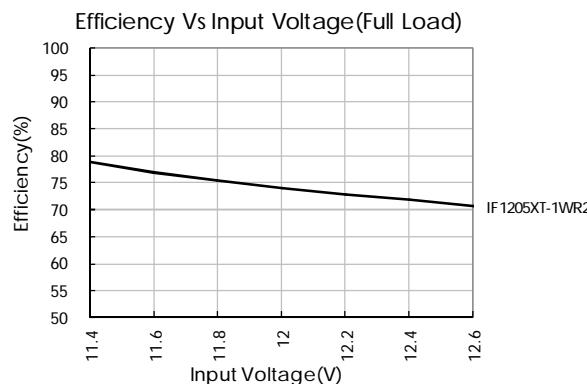

## Design Reference

### 1. Typical application

If it is required to further reduce input and output ripple, a filter capacitor can be connected to the input and output terminals, see Fig.2. Moreover, choosing suitable filter capacitor is very important , start-up problems may be caused by too large capacitance.To ensured the modules running well, the recommended capacitive load values as shown in Table 1.

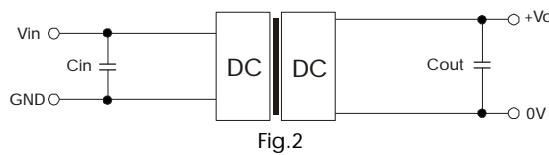


Recommended capacitive load value table (Table 1)

$V_{in}(\text{VDC})$	$C_{in}(\mu\text{F})$	$V_o (\text{VDC})$	$C_{out}(\mu\text{F})$
5	4.7	3.3/5	10
12	2.2	12	2.2
24	1	15	1

It is not recommended to connect any external capacitor when output power is less than 0.5W.

### 2. EMC typical recommended circuit

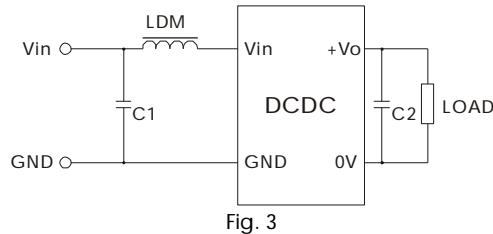

Input voltage (V)		5/12/24
EMI	C1	4.7 $\mu\text{F}$ /50V
	C2	Refer to the Cout in Fig.2
	LDM	6.8 $\mu\text{H}$

Note: It is not needed to add the component in the peripheral circuit when parameter with the symbol of "--"




### 3. Output load requirements

To ensure the module work efficiently and reliably, during the operation, the min. output load should be no less than 10% of the full load. If the actual output power is low, please connect a resistor to the output terminal in parallel, with a recommended resistance which is 10% of the rated power, and derating is required during operation.


### 4. For more information please find DC-DC converter application notes on [www.mornsun-power.com](http://www.mornsun-power.com)

Dimensions and Recommended Layout

THIRD ANGLE PROJECTION

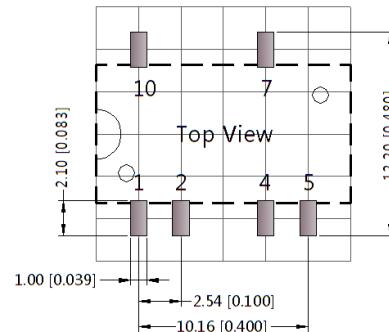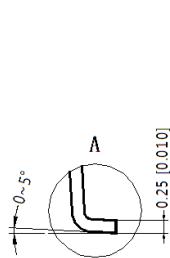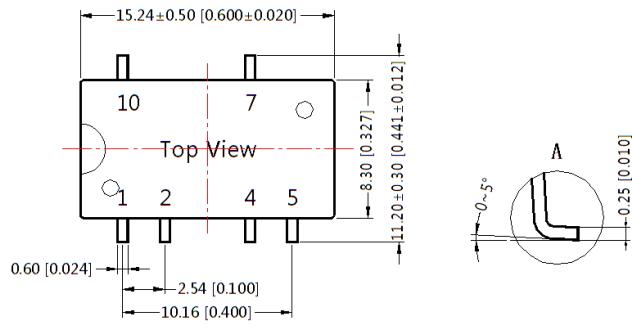

Note: Grid 2.54\*2.54mm

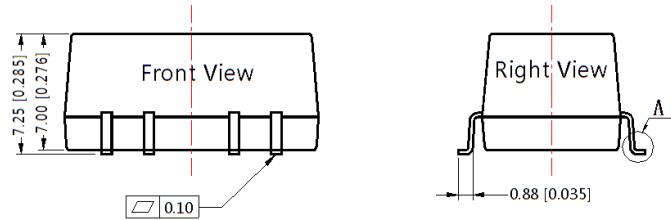

Note:

Unit: mm[inch]

Pin section tolerances: ±0.10[±0.004]

General tolerances: ±0.25[±0.010]

Pin-Out	
Pin	Function
1	GND
2	Vin
4	0V
5	0V
7	+Vo
10	NC

NC: No Connection

Notes:

1. Packing information please refer to "Product Packing Information".Packing bag number: 58210023;
2. If the product is operated out of the min. load requirement, the product performance may not meet all parameter indexes in this datasheet;
3. The max. capacitive load offered is tested at nominal input voltage and full load;
4. Unless otherwise specified,parameter indexes in this datasheet is measured under the conditions of Ta=25°C, humidity<75% with nominal input voltage and rated output load;
5. All testing methods in this datasheet are based on our Company's corporate standards;
6. The parameter indexes above are for the modules listed in this datasheet, for non-standard module's parameter indexes, please contact our technicians for specific information;
7. We can provide custom design;
8. Specifications are subject to change without prior notice.

MORNSUN Guangzhou Science & Technology Co., Ltd.

Address: No. 5, Kehui St. 1, Kehui Development Center, Science Ave., Guangzhou Science City, Luogang District, Guangzhou, P. R. China

Tel: 86-20-38601850-8801

Fax: 86-20-38601272

E-mail: [info@mornsun.cn](mailto:info@mornsun.cn)