



SRAF1020 - SRAF10150

Isolated 10.0 AMPS. Schottky Barrier Rectifiers


ITO-220AC

Features


- ✧ UL Recognized File # E-326243
- ✧ Isolated Plastic package.
- ✧ Low power loss, high efficiency.
- ✧ High current capability, Low VF.
- ✧ High reliability
- ✧ High surge current capability.
- ✧ Epitaxial construction.
- ✧ Guard-ring for transient protection.
- ✧ For use in low voltage, high frequency inverter, free wheeling, and polarity protection application
- ✧ Green compound with suffix "G" on packing code & prefix "G" on datecode.

Mechanical Data

- ✧ Cases: ITO-220AC molded plastic
- ✧ Epoxy: UL 94V-0 rate flame retardant
- ✧ Terminals: Pure tin plated, lead free. solderable per MIL-STD-202, Method 208 guaranteed
- ✧ Polarity: As marked
- ✧ High temperature soldering guaranteed: 260°C/10 seconds/ .25" (6.35mm) from case.
- ✧ Weight: 1.73 grams
- ✧ Mounting torque: 5 in – 1bs. max.

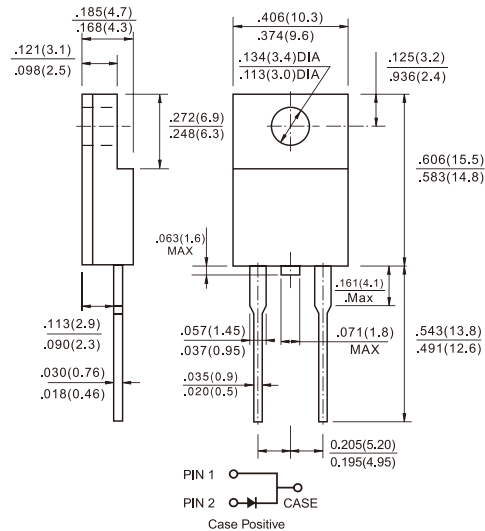

Dimensions in inches and (millimeters)
Marking Diagram



- SRAF10XX = Specific Device Code
- G = Green Compound
- Y = Year
- WW = Work Week

Maximum Ratings and Electrical Characteristics

Rating at 25 °C ambient temperature unless otherwise specified.
Single phase, half wave, 60 Hz, resistive or inductive load.
For capacitive load, derate current by 20%

Type Number	Symbol	SRAF 1020	SRAF 1030	SRAF 1040	SRAF 1050	SRAF 1060	SRAF 1090	SRAF 10100	SRAF 10150	Units	
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	20	30	40	50	60	90	100	150	V	
Maximum RMS Voltage	V_{RMS}	14	21	28	35	42	63	70	105	V	
Maximum DC Blocking Voltage	V_{DC}	20	30	40	50	60	90	100	150	V	
Maximum Average Forward Rectified Current @Tc=110 °C	$I_{F(AV)}$	10.0								A	
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	I_{FSM}	200								A	
Maximum Instantaneous Forward Voltage 10.0A	V_F	0.55		0.70		0.85		0.95		V	
Maximum D.C. Reverse Current at Rated DC Blocking Voltage (Note1)	I_R	0.5				0.1				mA	
		15		10		-				mA	
		-				5				mA	
Typical Junction Capacitance (Note 2)	C_j	420		280		165				pF	
Typical Thermal Resistance (Note3)	$R_{\theta JC}$	4.0								°C/W	
Operating Junction Temperature Range	T_J	-65 to +125				-65 to +150					°C
Storage Temperature Range	T_{STG}	-65 to +150								°C	

- Notes: 1. Pulse Test with PW=300 usec 1% Duty Cycle
2. Measured at 1MHz and Applied Reverse Voltage of 4.0V D.C.
3. Mounted on Heatsink Size of 2" x 3" x 0.25" Al-Plate.

RATINGS AND CHARACTERISTIC CURVES (SRAF1020 THRU SRAF10150)

FIG.1- FORWARD CURRENT DERATING CURVE

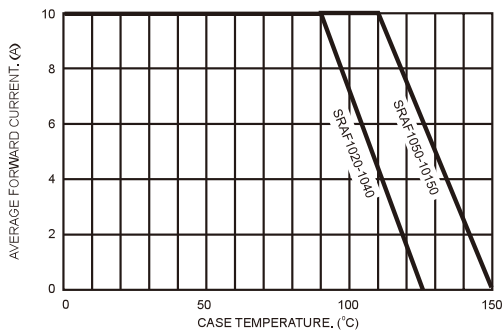


FIG.2- MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

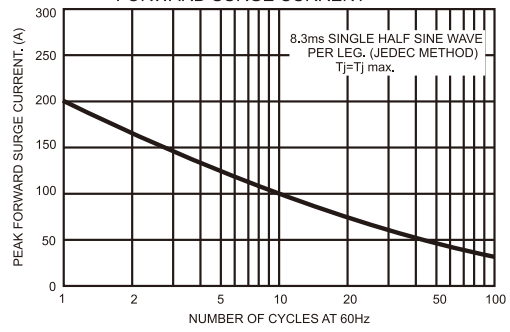


FIG.3- TYPICAL FORWARD CHARACTERISTICS

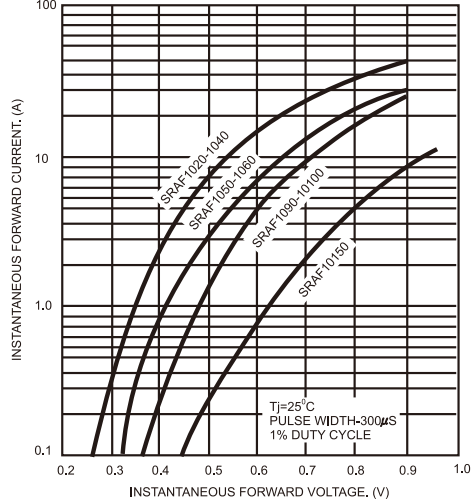


FIG.4- TYPICAL REVERSE CHARACTERISTICS

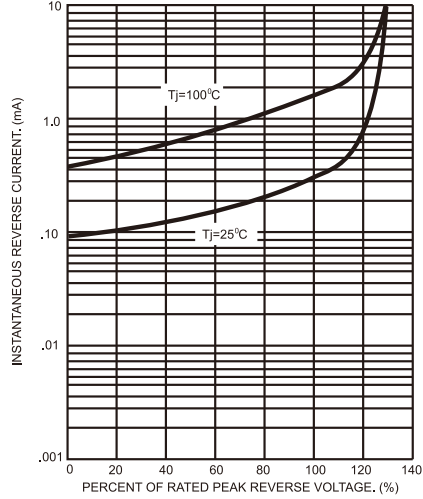


FIG.5- TYPICAL JUNCTION CAPACITANCE

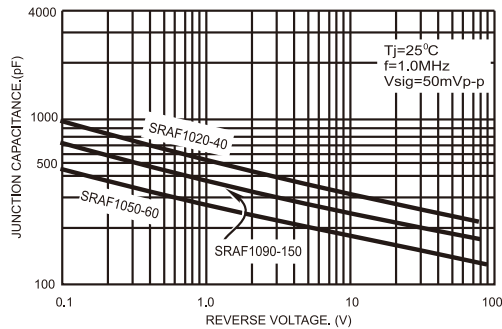


FIG.6- TYPICAL TRANSIENT THERMAL IMPEDANCE PER LEG

