



FEATURES

- Access time:55ns(max) for Vcc=3.0V~3.6V  
70/100ns(max) for Vcc=2.7V~3.6V
- CMOS Low operating power  
Operating : 45/35/25mA (Icc max)  
Standby : 20µA (TYP.) L-version  
3µA (TYP.) LL-version
- Single 2.7V~3.6V power supply
- Operating Temperature:  
Commercial : 0°C~70°C  
Extended : -20°C~80°C
- All inputs and outputs TTL compatible
- Fully static operation
- Three state outputs
- Data retention voltage : 1.5V (min)
- Package : 32-pin 8mm×20mm TSOP-I  
32-pin 8mm×13.4mm STSOP  
36-pin 6mm×8mm TFBGA


GENERAL DESCRIPTION

The UT62L5128 is a 4,194,304-bit high speed CMOS static random access memory organized as 524,288 words by 8 bits. It is fabricated using high performance, high reliability CMOS technology.



The UT62L5128 is designed for high speed system applications. It is particularly well suited for battery back-up nonvolatile memory applications.

The UT62L5128 operates from a single 2.7V~3.6V power supply and all inputs and outputs are fully TTL compatible.

FUNCTIONAL BLOCK DIAGRAM

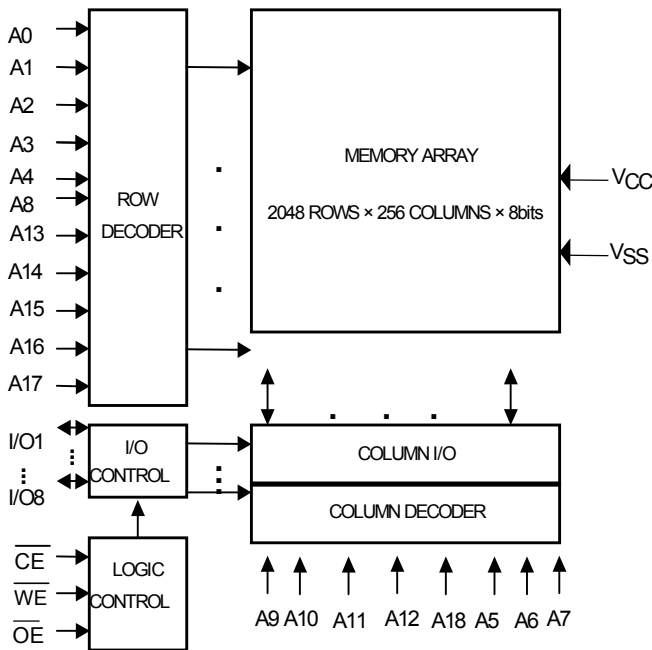

PIN CONFIGURATION

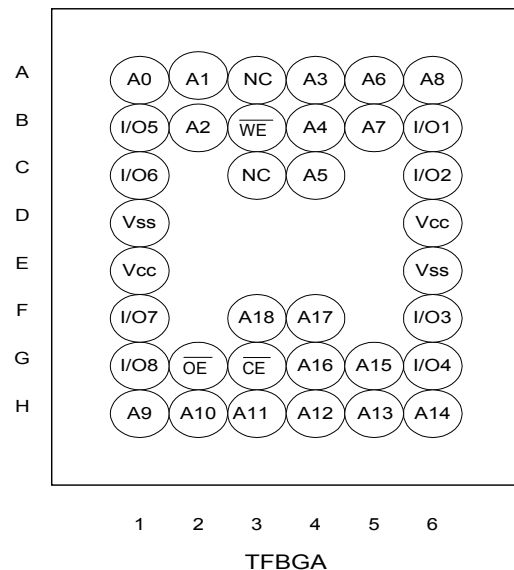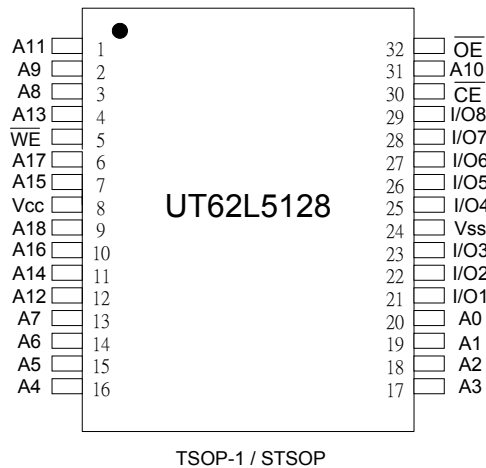

PIN DESCRIPTION

SYMBOL	DESCRIPTION
A0 - A18	Address Inputs
I/O1 - I/O8	Data Inputs/Outputs
CE	Chip Enable Input
WE	Write Enable Input
OE	Output Enable Input
Vcc	Power Supply
Vss	Ground
NC	No Connection



## TRUTH TABLE

MODE	$\overline{WE}$	$\overline{CE}$	$\overline{OE}$	I/O OPERATION	SUPPLY CURRENT
Standby	X	H	X	High – Z	$I_{SB}, I_{SB1}$
Output Disable	H	L	H	High – Z	$I_{CC}$
Read	H	L	L	$D_{OUT}$	$I_{CC}$
Write	L	L	X	$D_{IN}$	$I_{CC}$

Note: H =  $V_{IH}$ , L =  $V_{IL}$ , X = Don't care.

## ABSOLUTE MAXIMUM RATINGS\*

PARAMETER		SYMBOL	RATING	UNIT
Terminal Voltage with Respect to $V_{SS}$		$V_{TERM}$	-0.5 to 4.6	V
Operating Temperature	Commercial	$T_A$	0 to 70	$^{\circ}C$
	Extended	$T_A$	-20 to 80	$^{\circ}C$
Storage Temperature		$T_{STG}$	-65 to 150	$^{\circ}C$
Power Dissipation		$P_D$	1	W
DC Output Current		$I_{OUT}$	50	mA
Soldering Temperature (under 10 secs)		$T_{solder}$	260	$^{\circ}C$

\*Stresses greater than those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress rating only and functional operation of the device or any other conditions above those indicated in the operational sections of this specification is not implied. Exposure to the absolute maximum rating conditions for extended period may affect device reliability.

DC ELECTRICAL CHARACTERISTICS ( $V_{CC} = 2.7V \sim 3.6V$ ,  $T_A = 0^{\circ}C$  to  $70^{\circ}C$  /  $-20^{\circ}C$  to  $80^{\circ}C(E)$ )

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT	
Power Voltage	$V_{CC}$		2.7	3.0	3.6	V	
Input High Voltage	$V_{IH}$		2.0	-	$V_{CC}+0.3$	V	
Input Low Voltage	$V_{IL}$		-0.2	-	0.6	V	
Input Leakage Current	$I_{LI}$	$V_{SS} \leq V_{IN} \leq V_{CC}$	-1	-	1	$\mu A$	
Output Leakage Current	$I_{LO}$	$V_{SS} \leq V_{I/O} \leq V_{CC}$ , Output Disabled	-1	-	1	$\mu A$	
Output High Voltage	$V_{OH}$	$I_{OH} = -1mA$	2.2	-	-	V	
Output Low Voltage	$V_{OL}$	$I_{OL} = 2mA$	-	-	0.4	V	
Operating Power Supply Current	$I_{CC}$	Cycle time=Min.100% duty, $\overline{CE} = V_{IL}, I_{I/O} = 0mA$ ,	55	-	30	45	mA
			70	-	25	35	mA
			100	-	20	25	mA
	$I_{CC1}$	Cycle time = $1\mu s$ , 100% duty, $\overline{CE} \leq 0.2, I_{I/O} = 0mA$ , other pins at 0.2V or $V_{CC}-0.2V$ ,	-	4	5	mA	
$I_{CC2}$	Cycle time = 500ns, 100% duty, $\overline{CE} \leq 0.2, I_{I/O} = 0mA$ other pins at 0.2V or $V_{CC}-0.2V$ ,	-	8	10	mA		
Standby Current(TTL)	$I_{SB1}$	$\overline{CE} = V_{IH}$	-	0.3	0.5	mA	
Standby Current(CMOS)	$I_{SB1}$	$\overline{CE} \geq V_{CC}-0.2V$ other pins at 0.2V or $V_{CC}-0.2V$ ,	-L	-	20	80	$\mu A$
			-LL	-	3	25	$\mu A$

**CAPACITANCE** (TA=25°C, f=1.0MHz)

PARAMETER	SYMBOL	MIN.	MAX	UNIT
Input Capacitance	C <sub>IN</sub>	-	6	pF
Input/Output Capacitance	C <sub>I/O</sub>	-	8	pF

Note : These parameters are guaranteed by device characterization, but not production tested.

**AC TEST CONDITIONS**

Input Pulse Levels	0V to 3.0V
Input Rise and Fall Times	5ns
Input and Output Timing Reference Levels	1.5V
Output Load	C <sub>L</sub> = 30pF, I <sub>OH</sub> /I <sub>OL</sub> = -1mA/2mA

**AC ELECTRICAL CHARACTERISTICS** (V<sub>CC</sub> = 2.7V~3.6V, TA = 0°C to 70°C / -20°C to 80°C(E))**(1) READ CYCLE**

PARAMETER	SYMBOL	UT62L5128-55*		UT62L5128-70		UT62L5128-100		UNIT
		MIN.	MAX.	MIN.	MAX.	MIN.	MAX.	
Read Cycle Time	t <sub>RC</sub>	55	-	70	-	100	-	ns
Address Access Time	t <sub>AA</sub>	-	55	-	70	-	100	ns
Chip Enable Access Time	t <sub>ACE</sub>	-	55	-	70	-	100	ns
Output Enable Access Time	t <sub>OE</sub>	-	30	-	35	-	50	ns
Chip Enable to Output in Low Z	t <sub>CLZ*</sub>	10	-	10	-	10	-	ns
Output Enable to Output in Low Z	t <sub>OLZ*</sub>	5	-	5	-	5	-	ns
Chip Disable to Output in High Z	t <sub>CHZ*</sub>	-	20	-	25	-	30	ns
Output Disable to Output in High Z	t <sub>OHZ*</sub>	-	20	-	25	-	35	ns
Output Hold from Address Change	t <sub>OH</sub>	5	-	5	-	5	-	ns

**(2) WRITE CYCLE**

PARAMETER	SYMBOL	UT62L5128-55*		UT62L5128-70		UT62L5128-100		UNIT
		MIN.	MAX.	MIN.	MAX.	MIN.	MAX.	
Write Cycle Time	t <sub>WC</sub>	55	-	70	-	100	-	ns
Address Valid to End of Write	t <sub>AW</sub>	50	-	60	-	80	-	ns
Chip Enable to End of Write	t <sub>CW</sub>	50	-	60	-	80	-	ns
Address Set-up Time	t <sub>AS</sub>	0	-	0	-	0	-	ns
Write Pulse Width	t <sub>WP</sub>	45	-	55	-	70	-	ns
Write Recovery Time	t <sub>WR</sub>	0	-	0	-	0	-	ns
Data to Write Time Overlap	t <sub>DW</sub>	25	-	30	-	40	-	ns
Data Hold from End of Write Time	t <sub>DH</sub>	0	-	0	-	0	-	ns
Output Active from End of Write	t <sub>OW*</sub>	5	-	5	-	5	-	ns
Write to Output in High Z	t <sub>WHZ*</sub>	-	30	-	30	-	40	ns


\*These parameters are guaranteed by device characterization, but not production tested.

\*55ns for V<sub>CC</sub>=3.0V~3.6V




TIMING WAVEFORMS

READ CYCLE 1 (Address Controlled) (1,2,4)

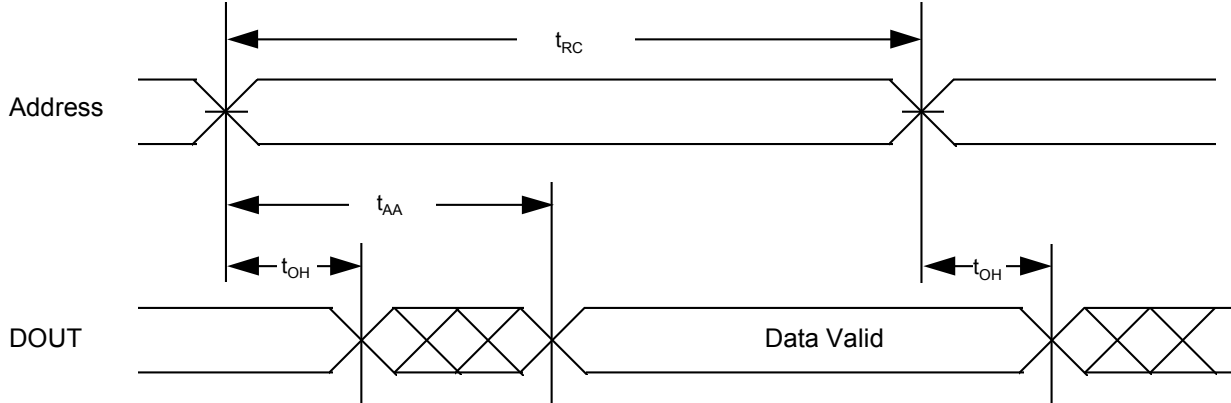

READ CYCLE 2 ( $\overline{CE}$  and  $\overline{OE}$  Controlled) (1,3,5,6)

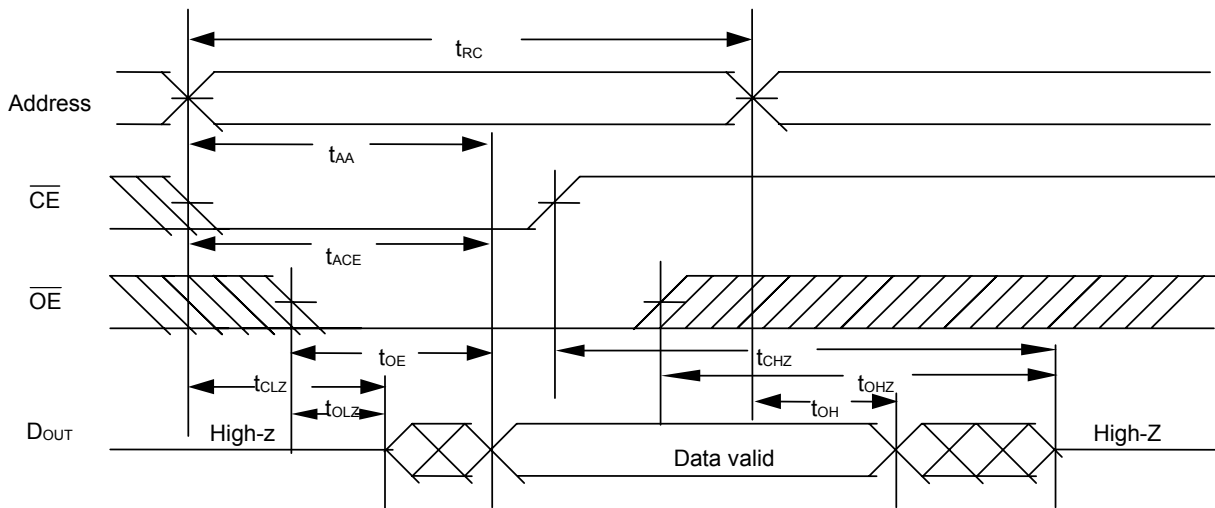


Notes :


1.  $\overline{WE}$  is HIGH for read cycle.
2. Device is continuously selected  $\overline{CE} = V_{IL}$ .
3. Address must be valid prior to or coincident with  $\overline{CE}$  transition; otherwise  $t_{AA}$  is the limiting parameter.
4.  $\overline{OE}$  is LOW.
5.  $t_{CLZ}$ ,  $t_{OLZ}$ ,  $t_{CHZ}$  and  $t_{OHZ}$  are specified with  $C_L = 5pF$ . Transition is measured  $\pm 500mV$  from steady state.
6. At any given temperature and voltage condition,  $t_{CHZ}$  is less than  $t_{CLZ}$ ,  $t_{OHZ}$  is less than  $t_{OLZ}$ .



WRITE CYCLE 1 ( $\overline{WE}$  Controlled) (1,2,3,5)

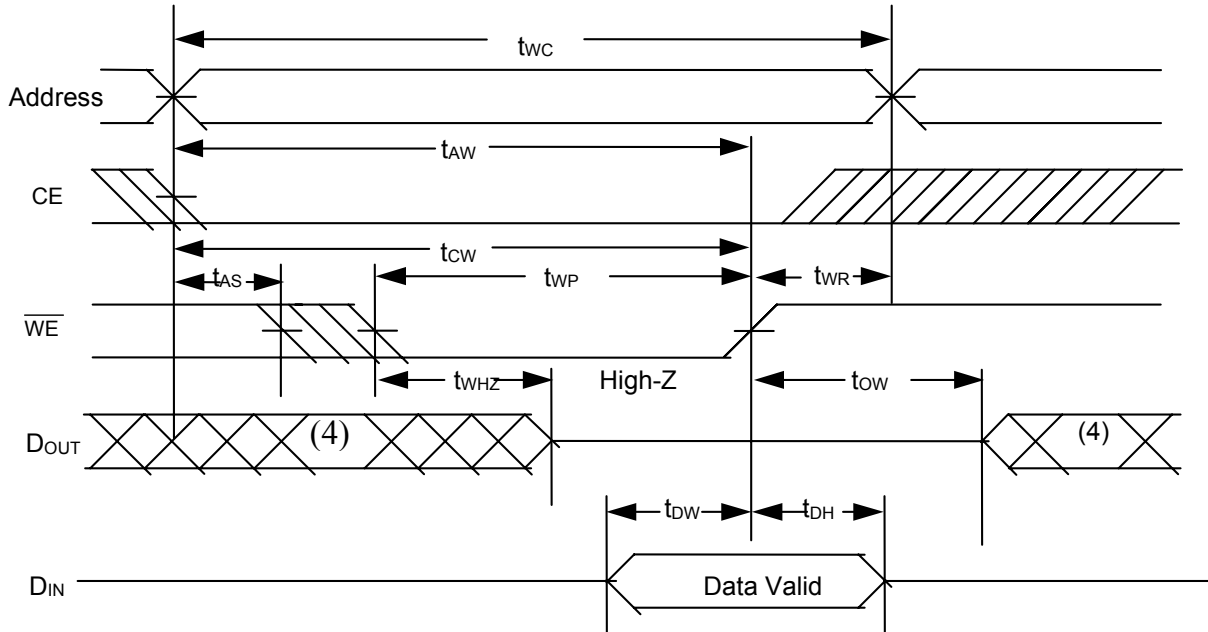

WRITE CYCLE 2 ( $\overline{CE}$  Controlled) (1,2,5)

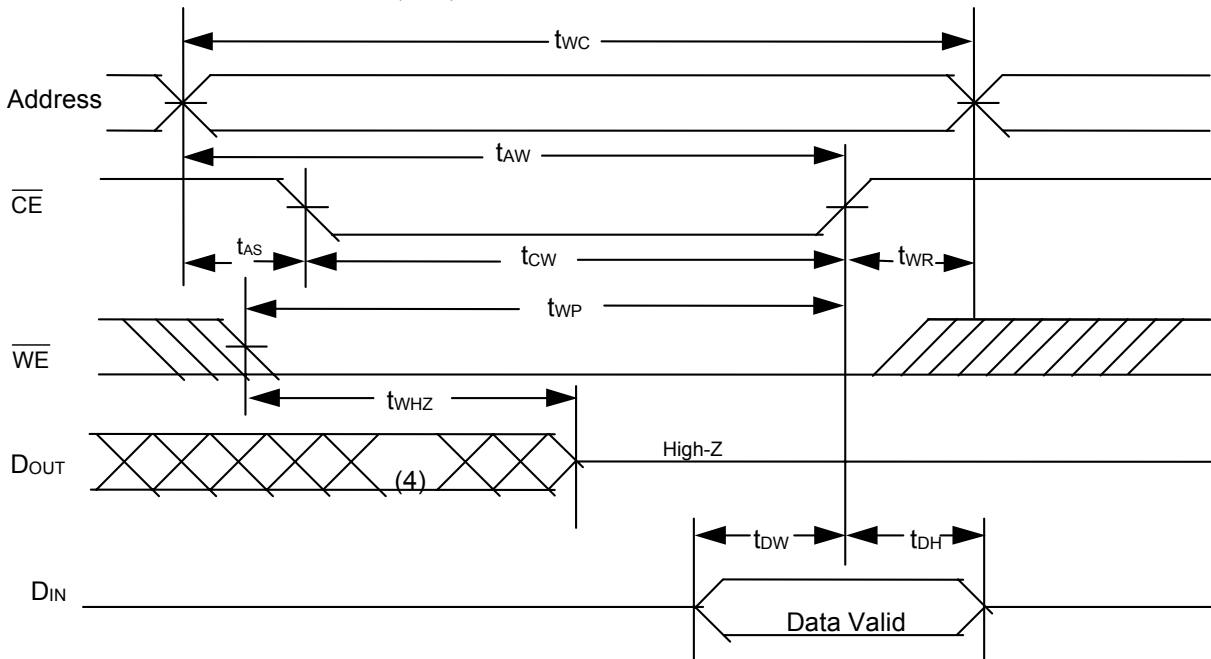

Notes :


1.  $\overline{WE}$  or  $\overline{CE}$  must be HIGH during all address transitions.
2. A write occurs during the overlap of a low  $\overline{CE}$  and a low  $\overline{WE}$ .
3. During a  $\overline{WE}$  controlled with write cycle with  $\overline{OE}$  LOW,  $t_{WP}$  must be greater than  $t_{WHZ}+t_{OW}$  to allow the drivers to turn off and data to be placed on the bus.
4. During this period, I/O pins are in the output state, and input signals must not be applied.
5. If the  $\overline{CE}$  LOW transition occurs simultaneously with or after  $\overline{WE}$  LOW transition, the outputs remain in a high impedance state.
6.  $t_{OW}$  and  $t_{WHZ}$  are specified with  $C_L = 5pF$ . Transition is measured  $\pm 500mV$  from steady state.



DATA RETENTION CHARACTERISTICS (TA = 0°C to 70°C / -20°C to 80°C(E))

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Vcc for Data Retention	VDR	$\overline{CE} \geq V_{CC}-0.2V$	1.5	-	3.6	V
Data Retention Current	IDR	Vcc=1.5V $\overline{CE} \geq V_{CC}-0.2V$	- L	1	50	$\mu A$
			- LL	0.5	20	$\mu A$
Chip Disable to Data Retention Time	t <sub>CDR</sub>	See Data Retention Waveforms (below)	0	-	-	ms
Recovery Time	t <sub>R</sub>		5	-	-	ms



DATA RETENTION WAVEFORM

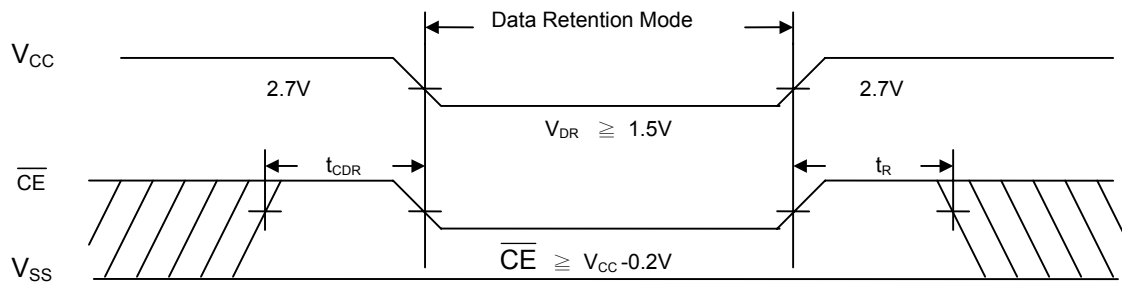



PACKAGE OUTLINE DIMENSION






32 pin 8mm x 20mm TSOP-I PACKAGE OUTLINE DIMENSION

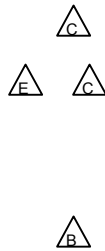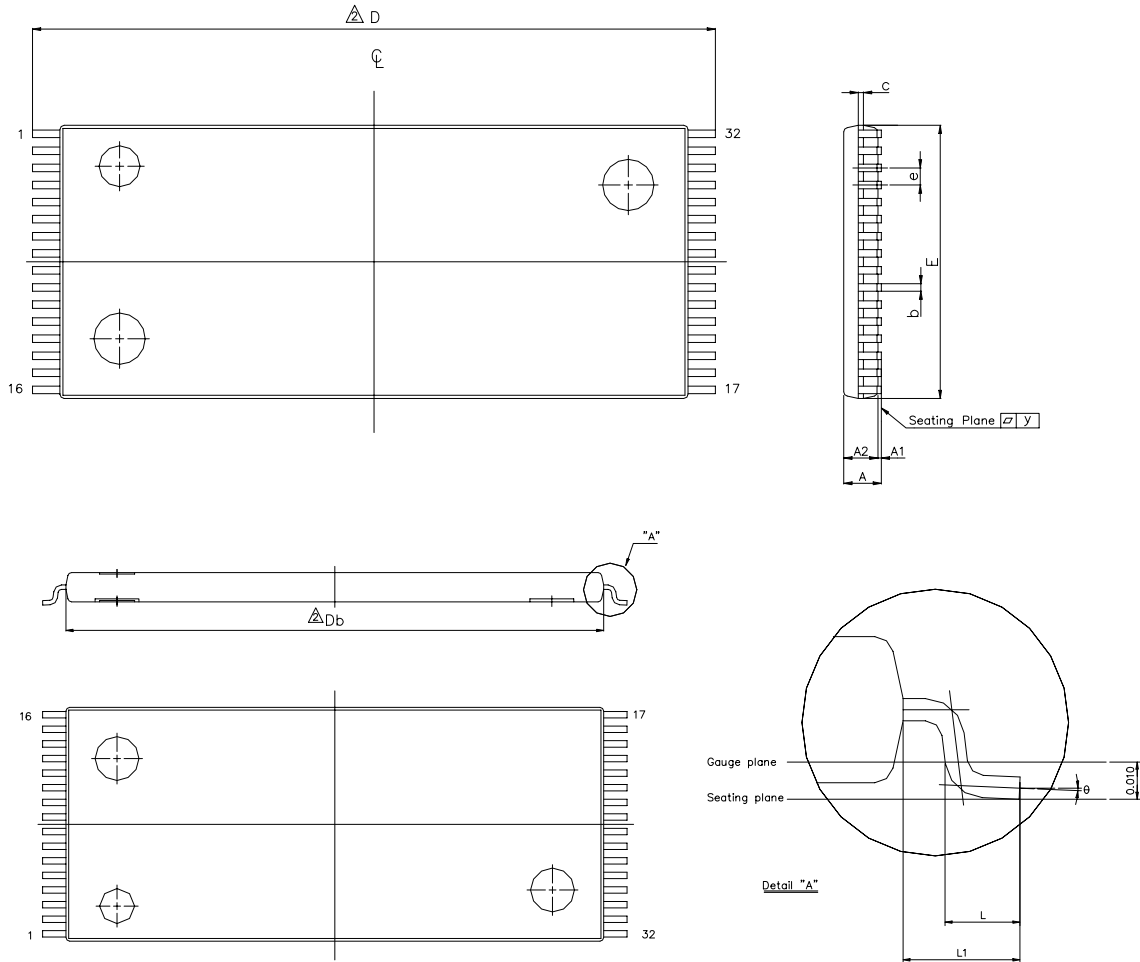

SYMBOL \ UNIT	INCH(BASE)	MM(REF)
A	0.047 (MAX)	1.20 (MAX)
A1	0.004 ±0.002	0.10 ±0.05
A2	0.039 ±0.002	1.00 ±0.05
b	0.008 + 0.002	0.20 + 0.05
c	0.005 (TYP)	0.127 (TYP)
D	0.724 ±0.004	18.40 ±0.10
E	0.315 ±0.004	8.00 ±0.10
e	0.020 (TYP)	0.50 (TYP)
HD	0.787 ±0.008	20.00 ±0.20
L	0.0197 ±0.004	0.50 ±0.10
L1	0.0315 ±0.004	0.08 ±0.10
y	0.003 (MAX)	0.076 (MAX)
θ	0°~5°	0°~5°



32 pin 8mm x 13.4mm STSOP PACKAGE OUTLINE DIMENSION

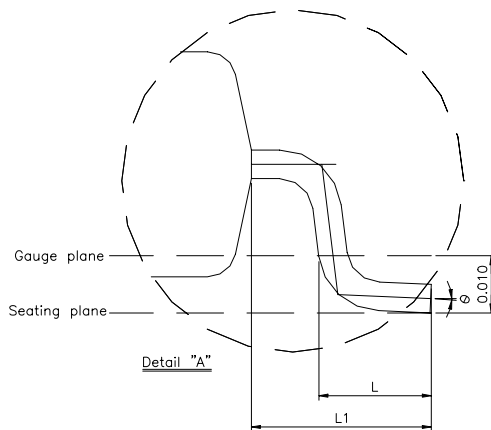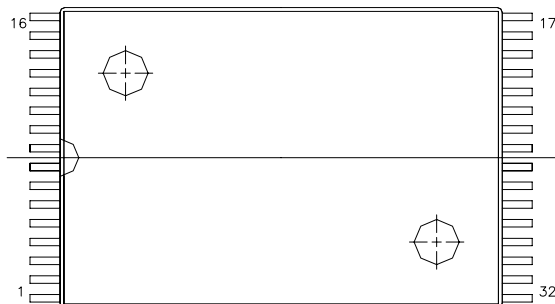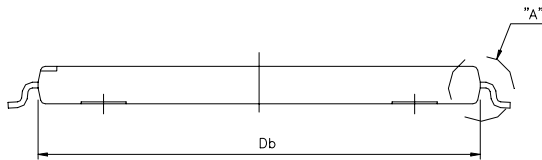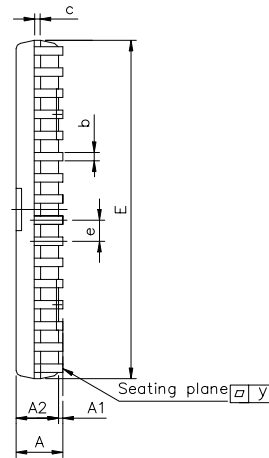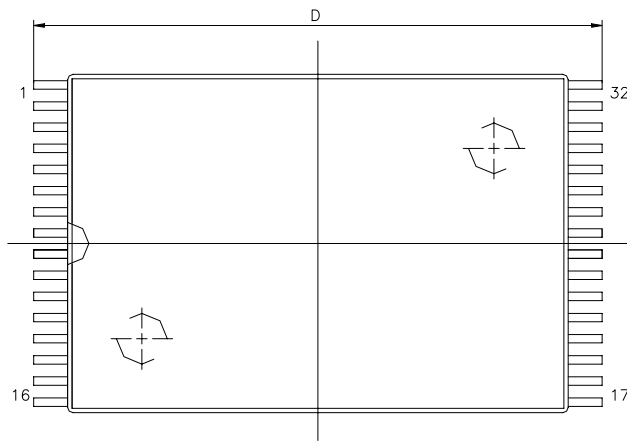

Note :


- 1.E dimension is not including end flash.
- 2.The total of both sides' end flash is not above 0.3mm.

SYMBOL	UNIT	MM(REF)	INCH(BASE)
A		1.20(Max.)	0.047(Max.)
A1		0.1060.05	0.00460.002
A2		1.0060.05	0.03960.002
b		0.20(typ.)	0.006(typ.)
c		0.15(typ.)	0.006(typ.)
D		13.4060.20	0.52660.006
Db		11.8060.10	0.46560.004
E		8.00060.10	0.31560.004
e		0.50(typ.)	0.020(typ.)
L		0.5060.10	0.02060.004
L1		0.8060.10	0.031560.004
y		0.08(Max.)	0.003(Max.)
e		08~58	08~58







36 pin 6mm×8mm TFBGA PACKAGE OUTLINE DIMENSION

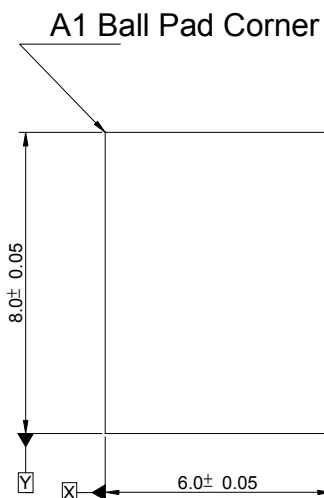


TOP VIEW (DIE VIEW)

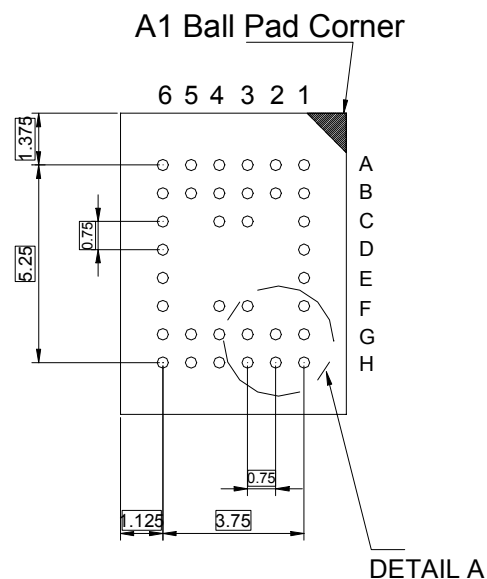

BOTTOM VIEW ( BALL SIDE )

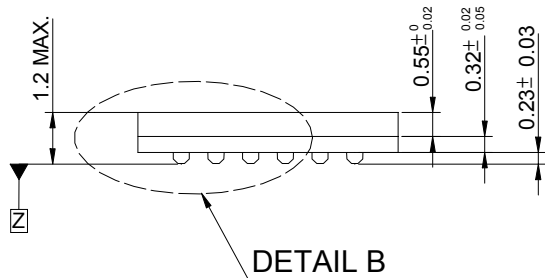

SIDE VIEW

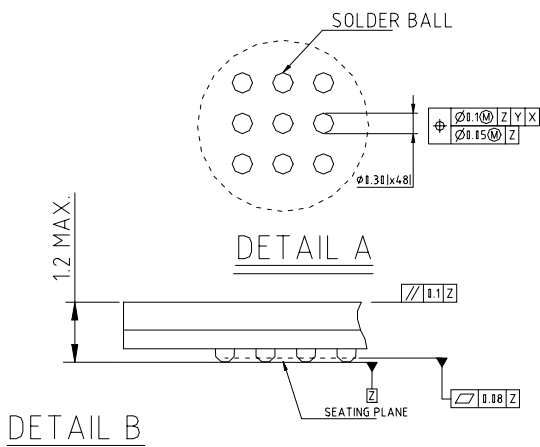



**ORDERING INFORMATION**

**COMMERCIAL TEMPERATURE**

PART NO.	ACCESS TIME (ns)	STANDBY CURRENT (μA) TYP.	PACKAGE
UT62L5128LC-55L	55	20	32 PIN TSOP- I
UT62L5128LC-55LL	55	3	32 PIN TSOP- I
UT62L5128LC-70L	70	20	32 PIN TSOP- I
UT62L5128LC-70LL	70	3	32 PIN TSOP- I
UT62L5128LS-55L	55	20	32 PIN STSOP
UT62L5128LS-55LL	55	3	32 PIN STSOP
UT62L5128LS-70L	70	20	32 PIN STSOP
UT62L5128LS-70LL	70	3	32 PIN STSOP
UT62L5128BS-55L	55	20	36 PIN TFBGA
UT62L5128BS-55LL	55	3	36 PIN TFBGA
UT62L5128BS-70L	70	20	36 PIN TFBGA
UT62L5128BS-70LL	70	3	36 PIN TFBGA

**EXTENDED TEMPERATURE**

PART NO.	ACCESS TIME (ns)	STANDBY CURRENT (μA) TYP.	PACKAGE
UT62L5128LC-55LE	55	20	32 PIN TSOP- I
UT62L5128LC-55LLE	55	3	32 PIN TSOP- I
UT62L5128LC-70LE	70	20	32 PIN TSOP- I
UT62L5128LC-70LLE	70	3	32 PIN TSOP- I
UT62L5128LS-55LE	55	20	32 PIN STSOP
UT62L5128LS-55LLE	55	3	32 PIN STSOP
UT62L5128LS-70LE	70	20	32 PIN STSOP
UT62L5128LS-70LLE	70	3	32 PIN STSOP
UT62L5128BS-55LE	55	20	36 PIN TFBGA
UT62L5128BS-55LLE	55	3	36 PIN TFBGA
UT62L5128BS-70LE	70	20	36 PIN TFBGA
UT62L5128BS-70LLE	70	3	36 PIN TFBGA



UTRON

Rev. 1.1

UT62L5128  
512K X 8 BIT LOW POWER CMOS SRAM

**REVISION HISTORY**

REVISION	DESCRIPTION	DATE
Preliminary Rev. 0.5	Original.	Mar, 2001
Rev. 1.0	1. The symbols CE# and OE# and WE# are revised as $\overline{CE}$ and $\overline{OE}$ and $\overline{WE}$ . 2. Separate Industrial and Consumer SPEC. 3. Add access time 55ns range.	Jun 21,2001
Rev. 1.1	Add STSOP package	Aug 3,2001



Rev. 1.1

UTRON

UT62L5128  
512K X 8 BIT LOW POWER CMOS SRAM

---

THIS PAGE IS LEFT BLANK INTENTIONALLY.