
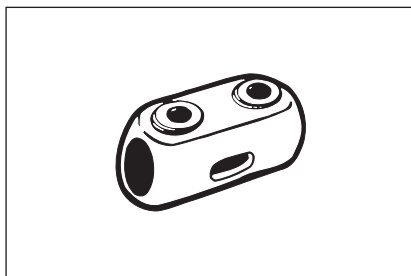


- Conveniently terminates parallel conductors

### Type TL – Two Conductor, Two Hole Mount

Cat. No.		Conductor Range		Dimensions (in.)									
Socket	Hex	max.	min.	L	W	H	F	D	K	E	G	J	J
TL250	TL250H	250 kcmil	1/0 str.	4 <sup>5</sup> / <sub>16</sub>	1 <sup>7</sup> / <sub>8</sub>	9 <sup>3</sup> / <sub>32</sub>	5 <sup>8</sup> / <sub>8</sub>	1 <sup>3</sup> / <sub>4</sub>	9 <sup>1</sup> / <sub>16</sub>	1 <sup>1</sup> / <sub>16</sub>	3 <sup>3</sup> / <sub>16</sub>	5 <sup>8</sup> / <sub>8</sub>	
TL400	TL400H	500 kcmil	4/0 str.	4 <sup>3</sup> / <sub>4</sub>	2 <sup>9</sup> / <sub>16</sub>	1 <sup>3</sup> / <sub>32</sub>	1 <sup>1</sup> / <sub>16</sub>	1 <sup>3</sup> / <sub>4</sub>	9 <sup>1</sup> / <sub>16</sub>	1 <sup>1</sup> / <sub>16</sub>	3	7 <sup>8</sup> / <sub>8</sub>	
TL650	TL650H	1000 kcmil	500 kcmil	5 <sup>5</sup> / <sub>16</sub>	3 <sup>1</sup> / <sub>4</sub>	9 <sup>1</sup> / <sub>16</sub>	5 <sup>8</sup> / <sub>8</sub>	1 <sup>3</sup> / <sub>4</sub>	9 <sup>1</sup> / <sub>16</sub>	2 <sup>3</sup> / <sub>16</sub>	3 <sup>3</sup> / <sub>8</sub>	1 <sup>1</sup> / <sub>4</sub>	

Four hole NEMA tang on TL650.  
U.L. 486A

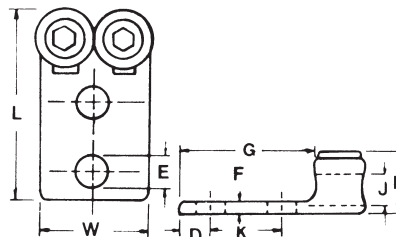

- Cast of high strength copper alloy
- Plated steel socket head set screws

### Type S – Copper End-to-End Splice Connector

Cat. No.	Conductor Range		Dimensions (in.)				
	max.	min.	L	W	H	J	I
S100BB	1 str.	4 sol.	1 <sup>11</sup> / <sub>16</sub>	5 <sup>8</sup> / <sub>8</sub>	1 <sup>1</sup> / <sub>16</sub>	9 <sup>8</sup> / <sub>8</sub>	1 <sup>5</sup> / <sub>16</sub>
S225BB*	4/0 str.	1 str.	2 <sup>3</sup> / <sub>16</sub>	2 <sup>7</sup> / <sub>32</sub>	3 <sup>1</sup> / <sub>32</sub>	9 <sup>1</sup> / <sub>16</sub>	1 <sup>3</sup> / <sub>16</sub>
S400BB	500 kcmil	4/0 str.	2 <sup>7</sup> / <sub>8</sub>	1 <sup>3</sup> / <sub>16</sub>	1 <sup>5</sup> / <sub>16</sub>	7 <sup>8</sup> / <sub>8</sub>	1 <sup>5</sup> / <sub>8</sub>

\* Not U.L. Listed.

