



Micro Commercial Components 20736 Marilla Street Chatsworth CA 91311

Phone: (818) 701-4933 Fax: (818) 701-4939 **BAT45**

Features

- Moisture Sensitivity Level 1
- Metal-to-silicon junction
- Low turn-on voltage
- Ultrafast switching speed
- · Marking: Cathode band and type number
- Lead Free Finish/Rohs Compliant (Note1) ("P"Suffix designates Compliant. See ordering information)

Maximum Ratings


- Operating Temperature: -55°C to +125°C
- Storage Temperature: 55°C to +150°C
- Maximum Thermal Resistance; 400°C/W Junction To Ambient

Electrical Characteristics @ 25°C Unless Otherwise Specified

Liecti icai characteristics 25 Conness other wise specified						
Peak Reverse Voltage	V_{RM}	15V				
Forward continuous Current	I _F	30mA	$T_A = 25^{\circ}C$			
Junction Temperature	T_J	125°C				
Peak Forward Surge Current	I _{FSM}	60mA	$T_p \le 1s$, $T_A = 25$ °C			
Maximum Instantaneous Forward Voltage	V _F *	0.38V 0.53V 1.0V	I _F = 1mA I _F = 10mA I _F = 30mA			
Maximum DC Reverse Current At Rated DC Blocking Voltage	I _R	100nA	V_R =6.0Volts T_J = 25°C			
Reverse Breakover Voltage	V_R	15V	I _R = 10μA			
Typical Junction Capacitance	CJ	2.0 pF	Measured at 1.0MHz, V _R =1V			

* Pulse Test: 300µSec pulse width, 2% duty cycle
Note: 1. Lead in Glass Exemption Applied, see EU Directive Annex 5.

30Milliamp Small Signal Schottky Diode 15 Volt

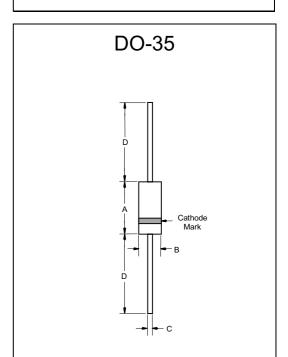

DIMENSIONS							
	INCH	HES	MM				
DIM	MIN	MAX	MIN	MAX	NOTE		
Α		.166		4.2			
В		.079		2.00			
С		.020		.52			
ח	1 000		25.40				

BAT45



Figure 1. Forward current versus forward voltage at different temperatures(typical values)

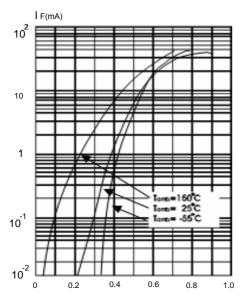


Figure 3.Reverse current versus ambient temperature

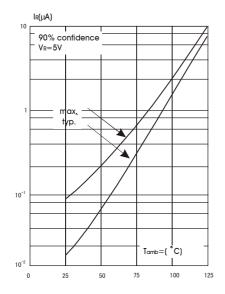


Figure 2. Forward current versus forward voltage (typical values)


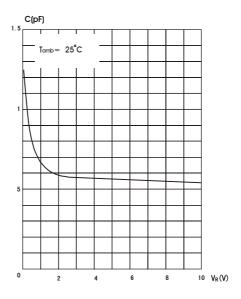


Figure 4.Reverse current versus continuous revers voltage (typical values)



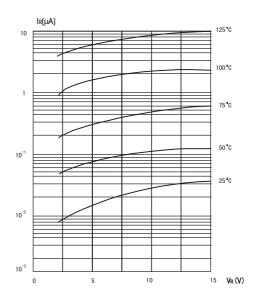

Micro Commercial Components

Ordering Information:

Device	Packing	
Part Number-TP	Tape&Reel: 10Kpcs/Reel	
Part Number-AP	Ammo Packing: 5Kpcs/Ammo Box	
Part Number-BP	Bulk: 100Kpcs/Carton	

IMPORTANT NOTICE

Micro Commercial Components Corp. reserves the right to make changes without further notice to any product herein to make corrections, modifications, enhancements, improvements, or other changes. **Micro Commercial Components Corp.** does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold **Micro Commercial Components Corp.** and all the companies whose products are represented on our website, harmless against all damages.

LIFE SUPPORT

MCC's products are not authorized for use as critical components in life support devices or systems without the express written approval of Micro Commercial Components Corporation.

CUSTOMER AWARENESS

Counterfeiting of semiconductor parts is a growing problem in the industry. Micro Commercial Components (MCC) is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. MCC strongly encourages customers to purchase MCC parts either directly from MCC or from Authorized MCC Distributors who are listed by country on our web page cited below. Products customers buy either from MCC directly or from Authorized MCC Distributors are genuine parts, have full traceability, meet MCC's quality standards for handling and storage. MCC will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources. MCC is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.