


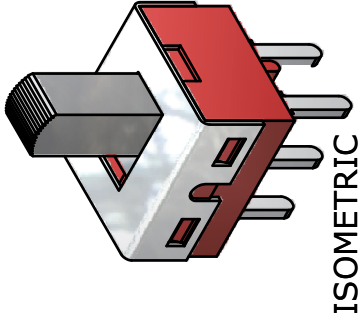



P.C. MOUNTING


SWITCH FUNCTION	POS. 1	POS. 2	POS. 3
ON	OFF	ON	
2-1, 5-4	OPEN	2-3, 5-6	

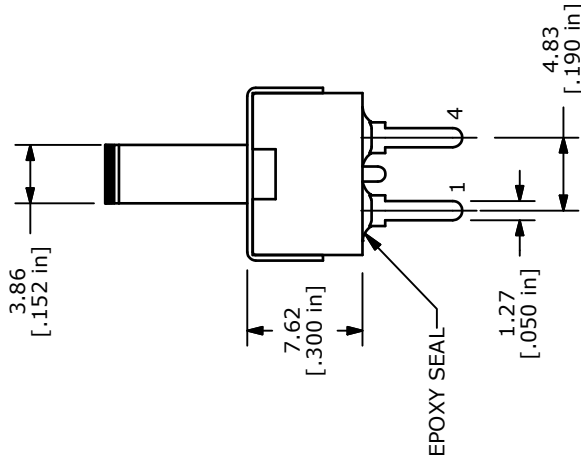

- NOTE:
- ALL DIMENSIONS IN MM [INCH]
  - GENERAL TOLERANCE: X.X=±0.4  
X.XX=±0.25
  - TERMINAL NUMBERS FOR REF ONLY
  - PLATING MATERIAL: SILVER
  - CONTACT RATING: 2A @ 250VAC  
5A @ 120VAC OR 28VDC
  - ELECTRIC LIFE: 30,000 ACTUATIONS AT FULL LOAD.
  - INSULATION RESISTANCE: 1,000 MEGA-OHM MIN.
  - DIELECTRIC STRENGTH: 1,000 V RMS @SEA LEVEL.
  - OPERATING TEMP.: -30°C to 85°C
  - ▲ DENOTES CRITICAL PARAMETER.
  - 2002/95/EC (ROHS) COMPLIANT
  - CONTACT RESISTANCE: 10 mΩ OHM MAX. INITIAL @ 2-4 VDC  
100mA FOR BOTH SILVER AND GOLD PLATING

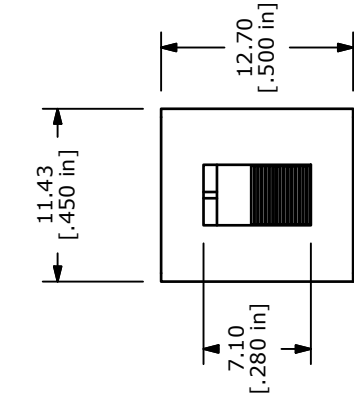

ISOMETRIC

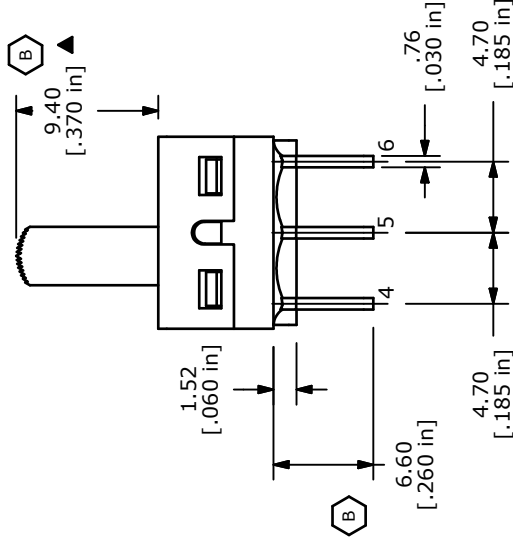

**E-SWITCH®**

TITLE 500SDP3S4M2QEA

B	19565	DRAWING UPDATE	1/6/11	BGL
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

SCALE 2:1

DATE 1/6/2011

DR BGL

DWG T521013

REV B