


CPDQT5V0-HF

RoHS Device

Halogen Free




Features

- IEC61000-4-2 Level 4 ESD protection.
- ESD Rating of Class 3 per Human Body Mode.
- Peak Power up to 150 Watts @ 8x20µs Pulse.
- Low Leakage current.
- Response Time is Typically <1ns
- Working Voltage: 5V

Mechanical data

- Case: 0402/SOD-882 small outline plastic package.
- Terminals: Matte tin plated, solderable per MIL-STD-750, method 2026.
- Mounting position: Any.
- High temperature soldering guaranteed: 260°C/10 second.
- Weight: 0.001 gram(approx.).

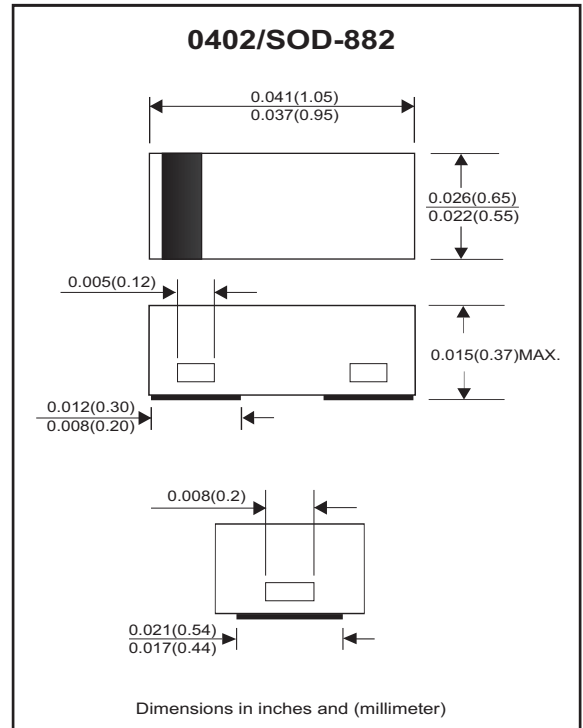

Circuit Diagram



Maximum Rating and Electrical Characteristics

(at TA=25°C unless otherwise noted, VF=0.9V Max. @ IF=10mA for all types)

Parameter	Conditions	Symbol	Min	Typ	Max	Unit
Maximum working Peak Reverse Voltage		VRWM			5.0	V
Maximum diode breakdown voltage	IR = 1mA	VBR	5.6			V
Maximum reverse leakage current	VR = 3.5V	IR			0.3	µA
	VR = 5V				0.5	
Junction capacitance	VR = 0V, f = 1MHz	CT		15		pF
ESD capability	IEC 61000-4-2(air)	ESD			15	kV
	IEC 61000-4-2(Contact)	ESD			8	kV
Clamping Voltage	I _{PP} = 5 A, tp=8/20us	V _c		11.6		V
	I _{PP} = 9.4 A, tp=8/20us	V _c			18.6	V
Peak Pulse Power	T _P =8/20us	P _{PK}			174	W
Maximum Junction temperature		T _j	-55		150	°C
Operation temperature range		T _{OP}	-40		125	°C
Storage temperature range		T _{STG}	-55		155	°C

NOTES:

1. VBR is measured with a pulse test current IR at an ambient temperature of 25°C.

Company reserves the right to improve product design , functions and reliability without notice.

REV:A

RATING AND CHARACTERISTIC CURVES (CPDQT5V0-HF)

Fig. 1 - Pulse Waveform



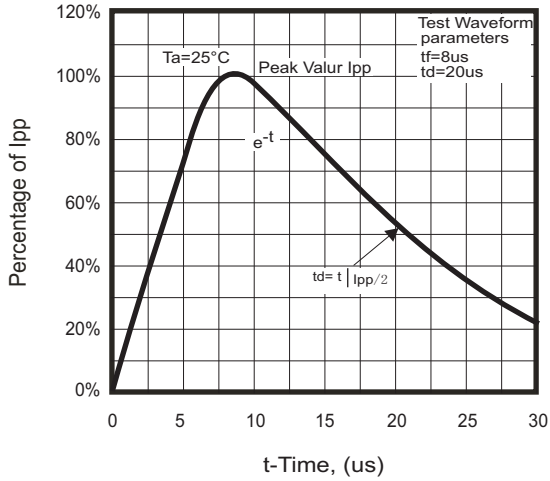


Fig. 2 - Power Derating Curve

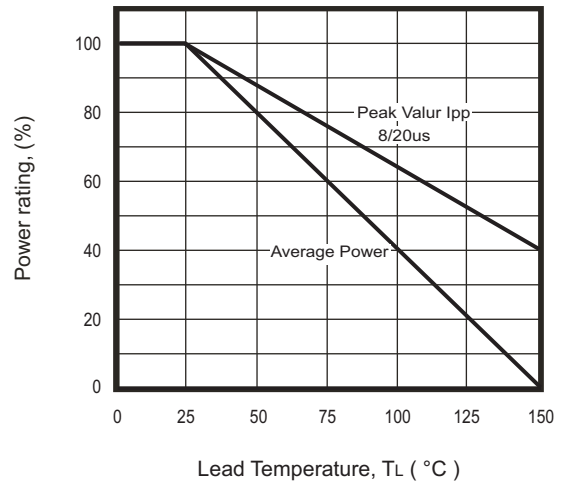

Marking Code

Part Number	Marking Code
CPDQT5V0-HF	C

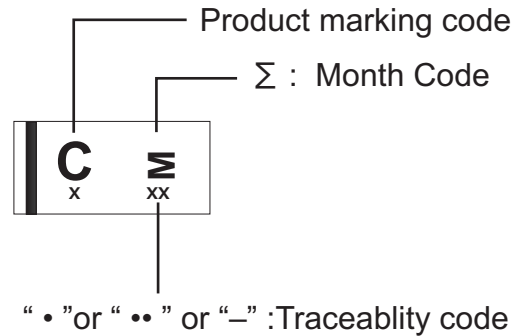


Month Code:

Month	Odd Year (per A.D.)	Even Year (per A.D.)
Jan	1	E
Feb	2	F
Wer	3	H
Apr	4	J
May	5	K
Jun	6	L

Month	Odd Year (per A.D.)	Even Year (per A.D.)
Jul	7	N
Aug	8	P
Sep	9	U
Oct	T	X
Nov	V	Y
Dec	C	Z

Suggested PAD Layout

SIZE	0402/SOD-882	
	(mm)	(inch)
A	0.700	0.028
B	0.400	0.016
C	0.700	0.028
D	1.100	0.043
E	0.300	0.012

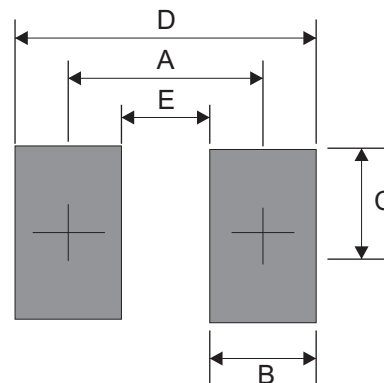

Standard Packaging

Case Type	REEL PACK	
	REEL (pcs)	Reel Size (inch)
0402/SOD-882	10,000	7