

Specification

Series	10W PAR30 3 LEDs High Power LED Lamp
Part Number	PAR30X-010-X000-0XX-27-0X-ND
Version	1.0
Date	12/14/2011



30°




40°/60°

10W PAR30 HIGH POWER LED LAMP**Features**

- Input Voltage: AC 100 ~ 240V
- Long life span
- Degree 30°/40°/60°
- No ultraviolet light, infrared light spectrum
- CE Certified, UL Pending
- Cool white and warm white
- Indoor Lighting
- Warranty Period: 2 years

**Product Dimension**

Dimensions unit: mm

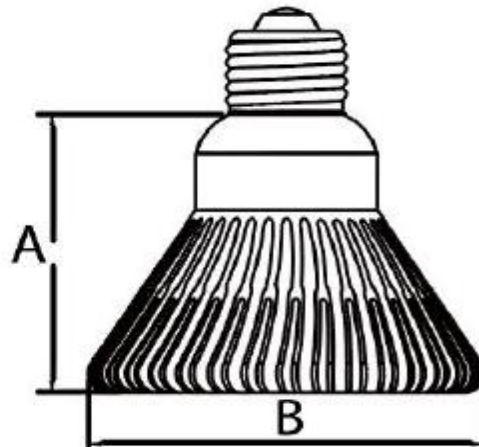

A=80/ B=92

Product: 10W PAR30 3 LEDs High Power LED Lamp	Date: December 14, 2011	Page 1 of 4
P/N: PAR30X-010-X000-0XX-27-0X-ND	Version# 1.0	

Specification


Part Number	PAR30X-010-3000-030-27-00-ND	PAR30X-010-6000-030-27-01-ND
View Angle	30°	
Input Voltage	AC 100 ~ 240V	
Front Lens Type	Optical Grade Plastic	
Input Current	700mA	
Body Temp.	< 75 °C	
CCT	3000K Warm White	6000K Cool White
CRI	80	75
Luminous Flux	420lm	700lm
Lens Transparency	Transparent Lens (1700 lux)	Mistful Lens (1400 lux)
Life Time	Up to 20,000 hrs	
Net Weight	240g	

Part Number	PAR30X-010-3000-040-27-00-ND	PAR30X-010-6000-040-27-01-ND
View Angle	40°	
Input Voltage	AC 100 ~ 240V	
Front Lens Type	Optical Grade Plastic	
Input Current	700mA	
Body Temp.	< 75 °C	
CCT	3000K Warm White	6000K Cool White
CRI	80	75
Luminous Flux	420lm	700lm
Lens Transparency	Transparent Lens (680 lux)	Mistful Lens (560 lux)
Life Time	Up to 20,000 hrs	
Net Weight	240g	

Part Number	PAR30X-010-3000-060-27-00-ND	PAR30X-010-6000-060-27-01-ND
View Angle	60°	
Input Voltage	AC 100 ~ 240V	
Front Lens Type	Optical Grade Plastic	
Input Current	700mA	
Body Temp.	< 75 °C	
CCT	3000K Warm White	6000K Cool White
CRI	80	75
Luminous Flux	420lm	700lm
Lens Transparency	Transparent Lens (170 lux)	Mistful Lens (140 lux)
Life Time	Up to 20,000 hrs	
Net Weight	240g	

Product: 10W PAR30 3 LEDs High Power LED Lamp	Date: December 14, 2011	Page 2 of 4
P/N: PAR30X-010-X000-0XX-27-0X-ND	Version# 1.0	

Test Method

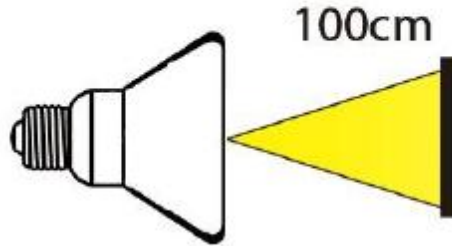

Part Number Coding:

PAR30	X	-	XXX	-	XXXX	-	XXX	-	XX	-	XX	-	XX
PAR30	X	-	010	-	3000	-	030	-	27	-	00	-	ND
	1		2		3		4		5		6		7
													8

Code	Description
1: Product Series	PAR30: PAR30 Series
2: LED Configuration	U:350mA H:150mA K:20~60mA
3: Power Input (W)	010: 10W
4: CCT	3000: 3000K Warm White 6000: 6000K Cool White
5: View Angle	030: 30° 040: 40° 060: 60°
6: Lamp Holder	27: E27
7: Lens Transparency	00: Transparent 01: Mistful
8: Dimming Control	ND: Non Dimmable TD: Dimmable

Revision History

Description:	Revision #	Revision Date
New Release of PAR30X-010-X000-0XX-27-0X-ND Series	V1.0	12/14/2011

Disclaimer

QT-BRIGHTTEK reserves the right to make changes without further notice to any products herein to improve reliability, function or design. QT-BRIGHTTEK does not assume any liability arising out of the application or use of any product or circuit described herein; neither does it convey any license under its patent rights, nor the rights of others.

Life Support Policy

QT-BRIGHTTEK's products are not authorized for use as critical components in life support devices or systems without the express written approval of QT-BRIGHTTEK. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

Product: 10W PAR30 3 LEDs High Power LED Lamp	Date: December 14, 2011	Page 4 of 4
P/N: PAR30X-010-X000-0XX-27-0X-ND	Version# 1.0	