

A

B

C

D

E

F

G

H

A

B

C




D

E

F

G

H

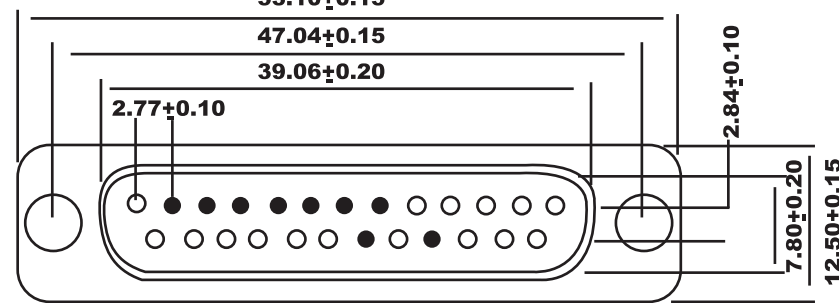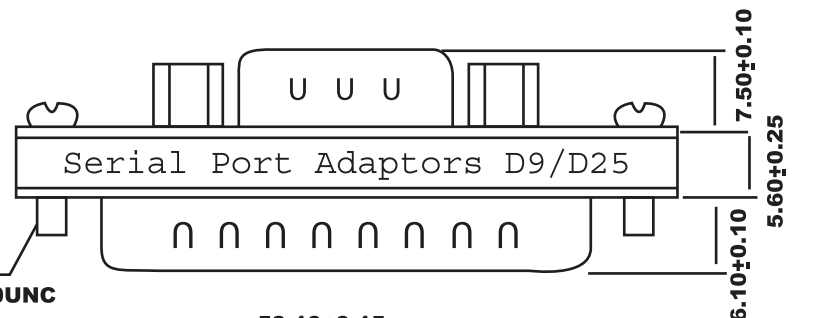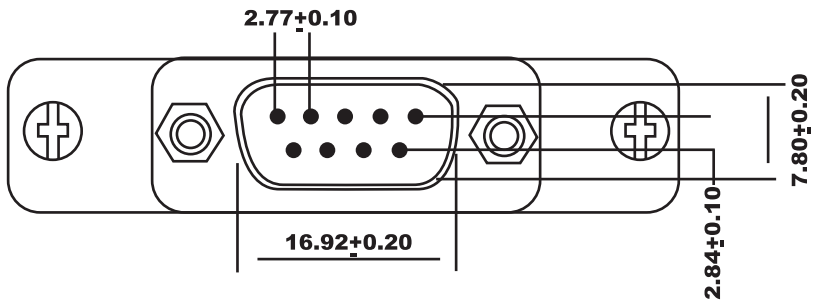

MA 001C (DB9M/25M Adaptor)
PIN OUT: 09Male 25Male

1	8
2	3
3	2
4	20
5	7
6	6
7	4
8	5
9	22
G	G

- 1.Label: Orange color with White character
- 2.One Side: Serial Port Adaptors D9/D25
- 3.The Other Side: MINI Adaptor

Specification:

- 1.Insulator: PBT Glass Fiber reinforced UL 94VO
- 2.Contact:Brass
- 3.Contact Plating: Gold plated over Nickel
- 4.Shell: Tin Plated Shell
- 5.Current Rating: 3 AMP
- 6.Dielectric Strength: 500V AC for one minute
- 7.Insulator Resistance: 500M min at 500V DC
- 8.Temperature:-25° C ----+105° C



Scale	1:1							Name	Item No. AB467-R
TOLERANCE						Drawn	11.22.11	Chappell	
X.X	±0.40					Approved			Title D-Sub RS 232 Adapter, 9 Pin - Male / 25 Pin - Male
X.XX	±0.25								
X.XXX	±0.15								Drawing No.
Angle	±3°								
									Replace
									Sheet

