



### 1. Dimensions:

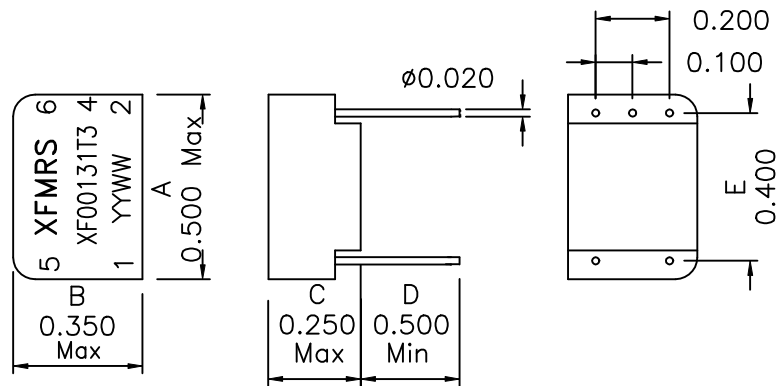

### 2. Schematic:

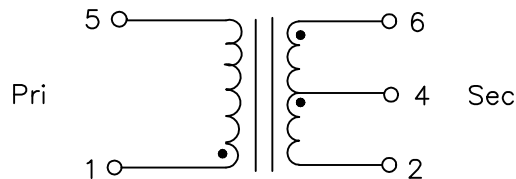

### 3. Electrical Specifications: @25°C

- Isolation Voltage: 1500Vrms (PRI/SEC)
- Turns Ratio: 1:1.36CT ±5% (PRI:SEC)
- PRI OCL: 1.2mH Minimum @100KHz 50mV
- PRI LL: 0.50uH Maximum @100KHz 50mV (SEC Shorted)
- Cw/w: 35pF Maximum @100KHz 50mV (PRI/SEC)
- DCR: P1-5 0.70 Ohms Maximum
- DCR: P2-6 1.0 Ohms Maximum
- REMOVE PIN#3

**Note:**

1. Solderability: Leads shall meet MIL-STD-202, Method 208D for solderability.
2. Flammability: UL94V-0,
3. ASTM oxygen index: > 28% ,
4. Temperature rating: 155°C. UL file E151556,
5. Operating Temperature Range: 0°C to +70°C

DOC. REV B/2

<b>XFMRs Inc</b>	Title: T1/CEPT/DS1 MAGNETICS TRANSFORMERS		
	UNLESS OTHERWISE SPECIFIED	P/N: XF00131T3	REV. B
TOLERANCES: .xxx ±0.010	DWN.	廖玉坤	May-25-01
Dimensions in Inch	CHK.	李清儿	May-25-01
SCALE 2:1 SHT 1 OF 1	APP.	BW	May-25-01