


New Jersey Semi-Conductor Products, Inc.

20 STERN AVE.
 SPRINGFIELD, NEW JERSEY 07081
 U.S.A.

TELEPHONE: (201) 376-2922
 (212) 227-6005
 FAX: (201) 376-8960


TYPE	MATERIAL	RECTIFIERS				
		V_R (volts)	V_F (volts)	I_O (Amps)	I_R (mA)	I_{surge} (Amps)
		SIGNAL DIODES				
		PRV (volts)	$V_C @ I_C$ (volts)	I_C	t_r (μ s)	
1N2103	S	50	1.2	0.75	0.3	10
1N2104	S	100	1.2	0.75	0.3	10
1N2105	S	200	1.2	0.75	0.3	10
1N2106	S	300	1.2	0.75	0.3	10
1N2107	S	400	1.2	0.75	0.3	10
1N2108	S	500	1.2	0.75	0.3	10
1N2109	S	50	1.2	2.0	0.3	10
1N2110	S	100	1.2	2.0	0.3	10
1N2111	S	200	1.2	2.0	0.3	10
1N2112	S	300	1.2	2.0	0.3	10
1N2113	S	400	1.2	2.0	0.3	10
1N2114	S	500	1.2	2.0	0.3	10
1N2115	S	365	0.8	0.2	0.25	10
1N2116	S	400	1.4	0.5	0.4	15
1N2117	S	720	1.3	0.75	0.010	15

D0-3

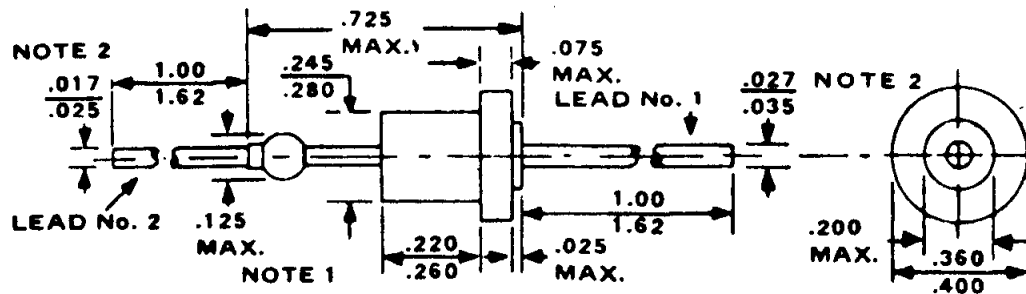

NOTES:

1. DIMENSION TO ALLOW FOR PINCH OR SEAL DEFORMATION ANYWHERE ALONG TUBULATION (OPTIONAL).
2. DIAMETER TO BE CONTROLLED FROM FREE END OF LEAD TO WITHIN .188" (4.78 MM) FROM THE POINT OF ATTACHMENT TO THE BODY. WITHIN THE .188" (4.78 MM) DIMENSION, THE DIAMETER MAY VARY TO ALLOW FOR LEAD FINISHES AND IRREGULARITIES.



Quality Semi-Conductors