

# B02

## FEMALE HEADER PROFILE : 4.5mm STRAIGHT

THICK: 2.54mm

### MATERIAL

INSULATOR - PBT (UL 94V-0)  
CONTACT - COPPER ALLOY

### SPECIFICATIONS

#### CURRENT RATING

1 AMP DC

#### CONTACT RESISTANCE

30 MILLIOHM MAX.

#### INSULATION RESISTANCE


1000 MEGOHM MIN.

#### DIELECTRIC VOLTAGE



500V AC FOR ONE MINUTE

#### OPERATING TEMPERATURE

-40°C TO 105°C

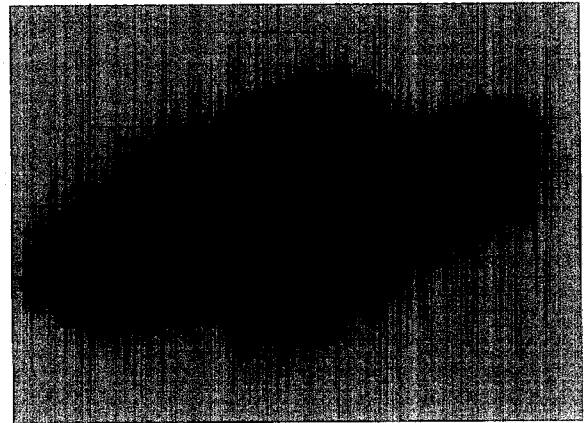

B

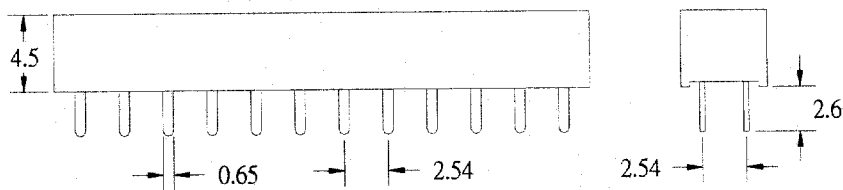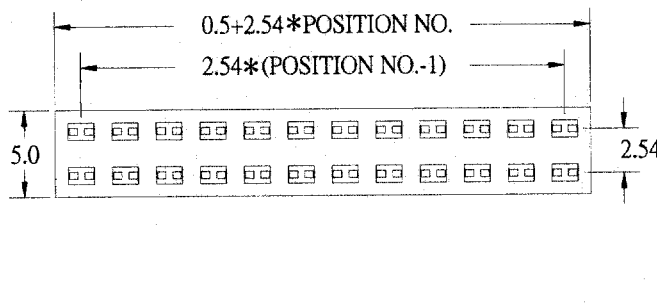

1.NO. OF CONTACT	2.CONTACT MATERIAL	3.CONTACT PLATING	4.INSULATOR COLOR
DUAL ROW 2*2 - 2*26	A: BRASS B: PHOSPHOR BRONZE	T: TIN PLATED S: SELECTIVE G: GOLD FLASH A: 5u" INCH GOLD B: 10u" INCH GOLD C: 15u" INCH GOLD D: 30u" INCH GOLD	1. BLACK

