


KBU35005 THRU KBU3510

SINGLE PHASE 35 AMP BRIDGE RECTIFIERS



FEATURES


- * Ideal for printed circuit board
- * Low forward voltage
- * Low leakage current
- * Polarity: marked on body
- * Mounting position: Any
- * Plastic material has Underwriters Laboratory Flammability classification 94V-O
- * Lead Free Finish/RoHS Compliant

VOLTAGE RANGE

50 to 1000 Volts

CURRENT

35.0 Ampere

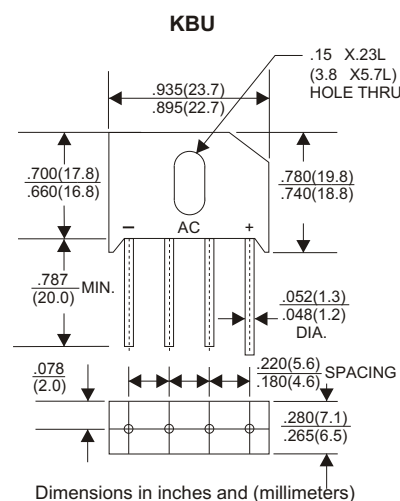

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating 25°C ambient temperature unless otherwise specified.
Single phase half wave, 60Hz, resistive or inductive load.
For capacitive load, derate current by 20%.

TYPE NUMBER	KBU35005	KBU3501	KBU3502	KBU3504	KBU3506	KBU3508	KBU3510	UNITS
Maximum Recurrent Peak Reverse Voltage	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current .375"(9.5mm) Lead Length at Tc=55°C	35							A
Peak Forward Surge Current, 8.3 ms single half sine-wave superimposed on rated load (JEDEC method)	400							A
Maximum Forward Voltage Drop per Bridge Element at 17.5A D.C.	1.1							V
Maximum DC Reverse Current Ta=25°C	10							uA
at Rated DC Blocking Voltage Ta=100°C	200							uA
Operating Temperature Range, Tj	-65 — +125							°C
Storage Temperature Range, TSTG	-65 — +150							°C
Thermal Resistance Between junction and case	1.4(1)							°C/W

(Notes 1) : Units Mounted on a aluminum plate heat sink.



高昇電子股份有限公司
KAUSHENG ELECTRONICS CO.,LTD
TEL:886-2-85227008 www.ks-elect.com

RATING AND CHARACTERISTIC CURVES (KBU35005 THRU KBU3510)

FIG.1-TYPICAL FORWARD CURRENT DERATING CURVE

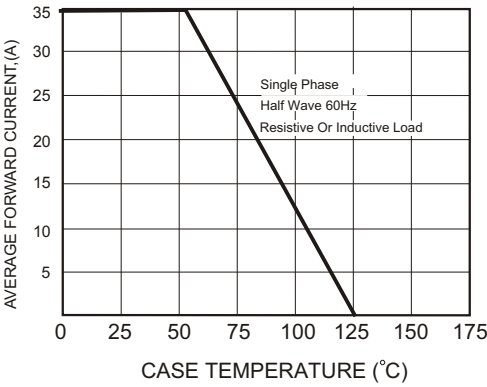


FIG.2-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

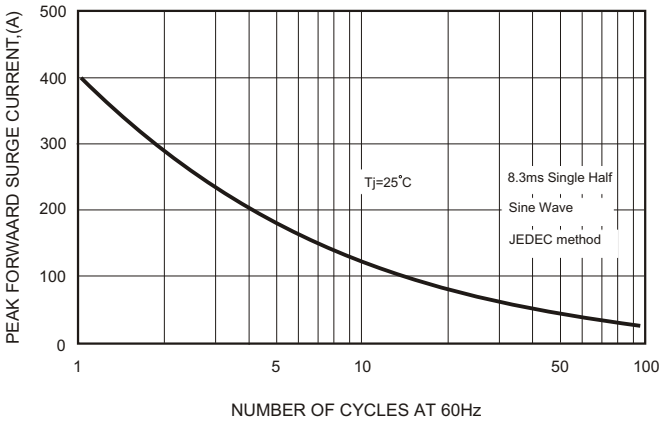


FIG.3-TYPICAL FORWARD CHARACTERISTICS


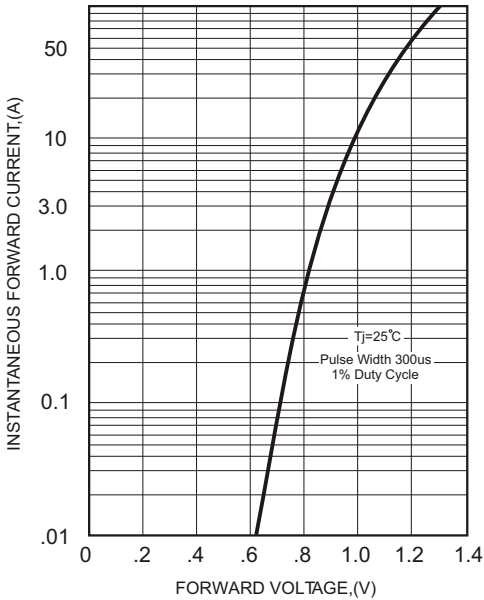


FIG.4-TYPICAL REVERSE CHARACTERISTICS

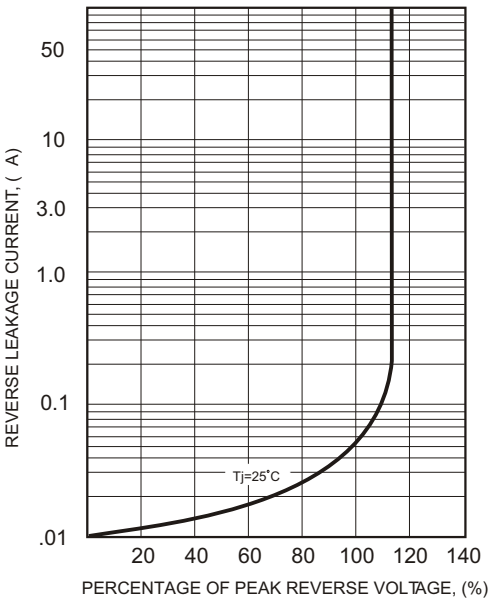

高昇電子股份有限公司

KAUSHENG ELECTRONICS CO.,LTD

TEL:886-2-85227008 www.ks-elect.com