


LPT40 Series

40 Watts

Total Power: 40 - 55 Watts
Input Voltage: 85 - 264 VAC
120 - 300VDC
of Outputs: Triple

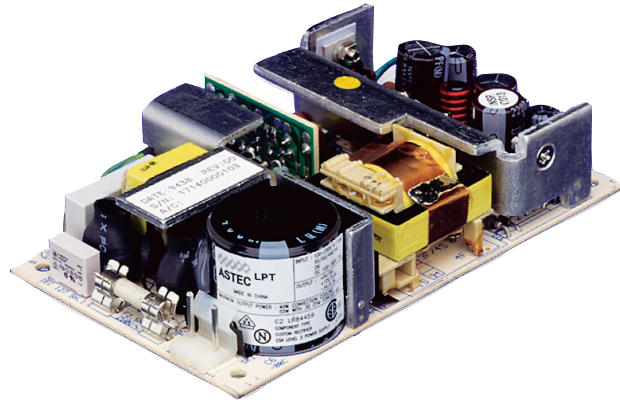

Special Features

- Universal input
- 3" x 5" footprint
- Less than 1U high
- Remote sense on main output
- Terminal Block option (-T)
- Built-in EMI filter
- Low output ripple
- Adjustable main output
- Overvoltage protection
- Overload protection
- 110 KHz switching frequency
- LPX40 enclosure kit available

Safety

- **UL** UL60950
E132002
- **CSA** CSA 22.2-234 Level 3
LR53982C
- **NEMKO** EN 60950/EMKO-TUE
P95100411
(74-sec) 203
- **CB** Certificate and report
1118, 1122, 1123, 1124
- **CE** Mark (LVD)

Electrical Specifications

Input

| | |
|--------------------------------|---|
| Input range: | 85-264 VAC 120-300 VDC |
| Frequency: | 47-440 Hz |
| Inrush current: | < 18 A peak @ 115 VAC; < 36A peak @ 230 VAC, cold start @ 25 °C |
| Input current: | 1A max. (RMS) @ 115 VAC |
| Efficiency: | 70% typical at full load (60% for LPT41) |
| EMI: | FCC Class B conducted; CISPR 22 Class B conducted EN55022 Class B conducted; VDE 0878 PT3 Class B conducted |
| Safety ground leakage current: | < 0.5 mA @ 50/60 Hz, 264 VAC input |

Output

| | |
|-------------------------|---|
| Maximum Power: | 40W for convection (LPT41, 25W); 55W with 30CFM forced air (LPT41, 41W) |
| Cross regulation: | ±2% on output 1; ±5% on outputs 2, 3 |
| Adjustment range: | -5, +10% minimum |
| Hold-up time: | 20ms @ 40W load, 115 VAC nominal line |
| Overload protection: | Short circuit protection on all outputs. Case overload protected @ 110% to 145% above peak rating |
| Overvoltage protection: | 5.7 to 6.7 VDC on the main output LPT41: 3.6 to 4.6VDC |
| Remote sense: | Compensates for 0.5 V lead drop min. Will operate without remote sense connected. Reverse connection protected. |




Environmental Specifications

| | |
|---------------------------------|---|
| Operating temperature: | 0° to 50 °C ambient derate each output at 2.5% per degree from 50° to 70 °C, -20 °C start up. |
| Electromagnetic susceptibility: | Designed to meet IEC 801, -2, -3, -4, -5, -6, Level 3 |
| Humidity: | Operating; non-condensing 5% to 95% |
| Vibration: | Three orthogonal axes, sweep at 1 oct/min, 5 min. dwell at four major resonances 0.75G peak 5 Hz to 500 Hz, operational |
| Storage temperature: | -40° to 85 °C |
| Temperature coefficient: | ±.04% per °C |
| MTBF demonstrated: | > 550,000 hours at full load and 25°C ambient conditions |


Ordering Information

| Model Number | Output Voltage | Minimum Load | Maximum Load with Convection cooling | Maximum Load with 30CFM Forced Air | Peak Load ¹ | Regulation ² | Ripple P/P (PARD) ³ |
|--------------|----------------|--------------|--------------------------------------|------------------------------------|------------------------|-------------------------|--------------------------------|
| LPT41(-T) | +3.3V | 0.5A | 4A | 7A | 7A | ±2% | 50mV |
| | +5V | 0A | 1.5A | 2.0A | 2.5A | ±2% | 50mV |
| | +12V | 0A | 0.5A | 0.7A | 0.7A | ±5% | 120mV |
| LPT42(-T) | +5V | 0.4A | 4A | 5A | 7A | ±2% | 50mV |
| | +12V | 0.2A | 2A | 2.5A | 4A | ±5% | 120mV |
| | -12V | 0A | 0.5A | 0.7A | 1A | ±5% | 120mV |
| LPT43(-T) | +5V | 0.5A | 6A | 8A | 9A | ±2% | 50mV |
| | +12V | 0A | 0.5A | 0.7A | 1A | ±5% | 120mV |
| | -12V | 0A | 0.5A | 0.7A | 1A | ±5% | 120mV |
| LPT44(-T) | +5V | 0.4A | 4A | 5A | 7A | ±2% | 50mV |
| | +12V | 0.2A | 2A | 2.5A | 4A | ±5% | 120mV |
| | -5V | 0A | 0.5A | 0.7A | 1A | ±5% | 50mV |
| LPT45(-T) | +5V | 0.4A | 4A | 5A | 7A | ±2% | 50mV |
| | +15V | 0.2A | 2A | 2.5A | 3A | ±5% | 150mV |
| | -15V | 0A | 0.5A | 0.7A | 1A | ±5% | 150mV |
| LPT46(-T) | +5V | 0.4A | 4A | 5A | 6A | ±2% | 50mV |
| | +24V | 0.1A | 1.0A | 1.5A | 2A | ±7% | 240mV |
| | +12V | 0A | 0.5A | 0.7A | 1A | ±5% | 120mV |
| LPT47(-T) | +5V | 0.4A | 4A | 5A | 6A | ±2% | 50mV |
| | +24V | 0.2A | 1.0A | 1.5A | 2A | ±7% | 240mV |
| | -12V | 0A | 0.5A | 0.7A | 1A | ±5% | 120mV |

1. Peak current lasting < 30 seconds with a maximum 10% duty cycle.
2. At 25 °C including initial tolerance, line voltage, load currents and output voltages adjusted to factory settings.
3. Peak-to-peak with 20 MHz bandwidth and 10 μF in parallel with a 0.1 μF capacitor at rated line voltage and load ranges.
4. Minimum Loads are required.
5. (-T) indicates Terminal Block option for input and output (instead of Molex type)

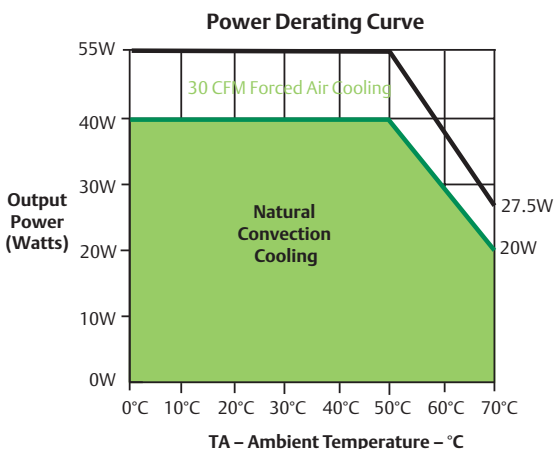

Mechanical Drawing

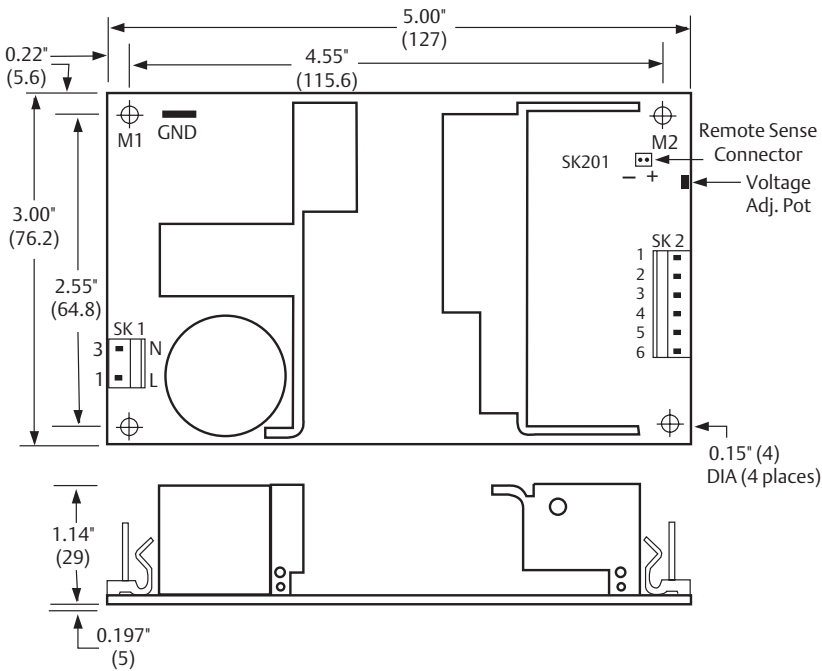

Americas

5810 Van Allen Way
Carlsbad, CA 92008
USA
Telephone: +1 760 930 4600
Facsimile: +1 760 930 0698

Europe (UK)

Waterfront Business Park
Merry Hill, Dudley
West Midlands, DY5 1LX
United Kingdom
Telephone: +44 (0) 1384 842 211
Facsimile: +44 (0) 1384 843 355

Asia (HK)

14/F, Lu Plaza
2 Wing Yip Street
Kwun Tong, Kowloon
Hong Kong
Telephone: +852 2176 3333
Facsimile: +852 2176 3888

For global contact, visit:

www.PowerConversion.com

techsupport.embeddedpower@emerson.com

While every precaution has been taken to ensure accuracy and completeness in this literature, Emerson Network Power assumes no responsibility, and disclaims all liability for damages resulting from use of this information or for any errors or omissions.

Emerson Network Power.

The global leader in enabling business-critical continuity.

- AC Power
- Connectivity
- DC Power
- Embedded Computing
- Embedded Power
- Monitoring
- Outside Plant
- Power Switching & Controls
- Precision Cooling
- Racks & Integrated Cabinets
- Services
- Surge Protection

EmersonNetworkPower.com

Emerson Network Power and the Emerson Network Power logo are trademarks and service marks of Emerson Electric Co.
©2008 Emerson Electric Co.

Pin Assignments

| Connector | LPT41 | LPT42 | LPT43 | LPT44 | LPT45 | LPT46 | LPT47 |
|-----------|---------|---------|---------|---------|---------|---------|---------|
| SK1-1 | Line | Line | Line | Line | Line | Line | Line |
| SK1-3 | Neutral | Neutral | Neutral | Neutral | Neutral | Neutral | Neutral |
| SK2-1 | 5V | +12V | +12V | +12V | +15V | +24V | +24V |
| SK2- 2 | 3.3V | +5V | +5V | +5V | +5V | +5V | +5V |
| SK2- 3 | 3.3V | +5V | +5V | +5V | +5V | +5V | +5V |
| SK2-4 | Common | Common | Common | Common | Common | Common | Common |
| SK2-5 | Common | Common | Common | Common | Common | Common | Common |
| SK2-6 | 12V | -12V | -12V | -5V | -15V | +12V | -12V |
| SK201-1 | +Sense | +Sense | +Sense | +Sense | +Sense | +Sense | +Sense |
| SK201-2 | -Sense | -Sense | -Sense | -Sense | -Sense | -Sense | -Sense |

Mating Connectors

AC Input: Molex 09-50-8031 (USA) Not required for (-T) option
09-91-0300 (UK)
PINS: 08-52-0113

DC Outputs: Molex 09-50-8061 (USA) Not required for (-T) option
09-91-0600 (UK)
PINS: 08-52-0113

Remote Sense: Molex 22-01-2025
PINS: 08-52-0123

Emerson Network Power Connector Kit #70-841-006, includes all of the above

1. Specifications subject to change without notice.
2. All dimensions in inches (mm), tolerance is ± 0.02 " (± 0.5 mm)
3. Mounting holes M1 and M2 should be grounded for EMI purposes.
4. Mounting hole M1 is safety ground connection.
5. Specifications are for convection rating at factory settings at 115 VAC input, 25 °C unless otherwise stated.
6. Warranty: 2 year
7. Weight: 0.5lbs/0.23kg

LPT40 Series WebSheet



- **Total Max Power:** 55 W
- **Total Max Current:** 7 A
- **Input Voltage:** 85 V to 264 V
- **Output Voltage:** -15 V to 24 V
- **Outputs:** Triple
- **Size (L x W x H):** 5.000" x 3.000" x 1.200"
- **Warranty:** 2 years
- **Operating Temperature:** -20 to +70

 [Download Datasheet](#)

Special features

- LPX40 enclosure kit available

- Universal input
- 3" x 5" footprint
- Remote sense on main output
- Built-in EMI filter
- Low output ripple
- Adjustable main output
- Overvoltage protection
- 110 KHz switching frequency
- Terminal block option (-T)
- Less than 1U high
- Overload protection

Electrical specs

Input

- Inrush current: <18 A peak @ 115 VAC; <36 A peak @ 230 VAC
- EMI filter: FCC Class B conducted; CISPR 22 Class B conducted
- Efficiency: 70% typical at full load (60% for LPT41)

- Safety ground leakage current: <math><0.5\text{ mA}</math> @ 50/60 Hz, 264 VAC input
- Input range: 85-264 VAC 120-300 VDC
- Frequency: 47-440 Hz
- Input current: 1 A max. (RMS) @ 115 VAC

Output

- Hold-up time: 20 ms @ 40 W load, 115 VAC nominal line
- Cross regulation: $\pm 2\%$ on output 1; $\pm 5\%$ on outputs 2, 3
- Overvoltage protection: 5.7 to 6.7 VDC on main output LPT41: 3.6 to 4.6 V
- Remote sense: Compensates for 0.5 V lead drop min.
- Adjustment range: -5, +10% minimum
- Maximum power: 40 W for convection, (LPT41, 25W); 55 W w/30 CFM
- Overload protection: Short circuit protection and Case overload

LPT40 models

Output(s)

Model No

Buy
Now

Evaluation

| | | | |
|--|-------|-------------------------|-------------------------|
| 3.63 V @ 7 A, 5 V @ 2 A, 12 V @ 0.7 A | LPT41 | Buy Now | Request |
| 5.5 V @ 5 A, 12 V @ 2.5 A, -12 V @ 0.7 A | LPT42 | Buy Now | Request |
| 5.5 V @ 8 A, 12 V @ 0.7 A, -12 V @ 0.7 A | LPT43 | Buy Now | Request |
| 5.5 V @ 5 A, 12 V @ 2.5 A, -5 V @ 0.7 A | LPT44 | Buy Now | Request |
| 5.5 V @ 5 A, 15 V @ 2.5 A, -15 V @ 0.7 A | LPT45 | Buy Now | Request |
| 5.5 V @ 5 A, 24 V @ 1.5 A, 12 V @ 0.7 A | LPT46 | Buy Now | Request |
| 5.5 V @ 5 A, 24 V @ 1.5 A, -12 V @ 0.7 A | LPT47 | Buy Now | Request |

[Home](#) | [About us](#) | [Press room](#) | [AC-DC power supplies](#) | [DC-DC converters](#) | [Support](#) | [Contact us](#) | [Sitemap](#) | [My Power](#)
 © 2010 Emerson Network Power. All Rights Reserved. [Power Conversion](#) | [Corporate website design](#) by Freshleaf Media.