

# MSF15N60

## N-Channel Enhancement Mode Power MOSFET

### Description

The MSF15N60 is a N-channel enhancement-mode MOSFET, providing the designer with the best combination of fast switching, ruggedized device design, low on-resistance and cost effectiveness. The TO-220F package is universally preferred for all commercial-industrial applications

### Features


- Low On Resistance
- Simple Drive Requirement
- Low Gate Charge
- Fast Switching Characteristic
- RoHS compliant package

### Application


- Adapter
- Switching Mode Power Supply

### Packing & Order Information

50/Tube ; 1,000/Box

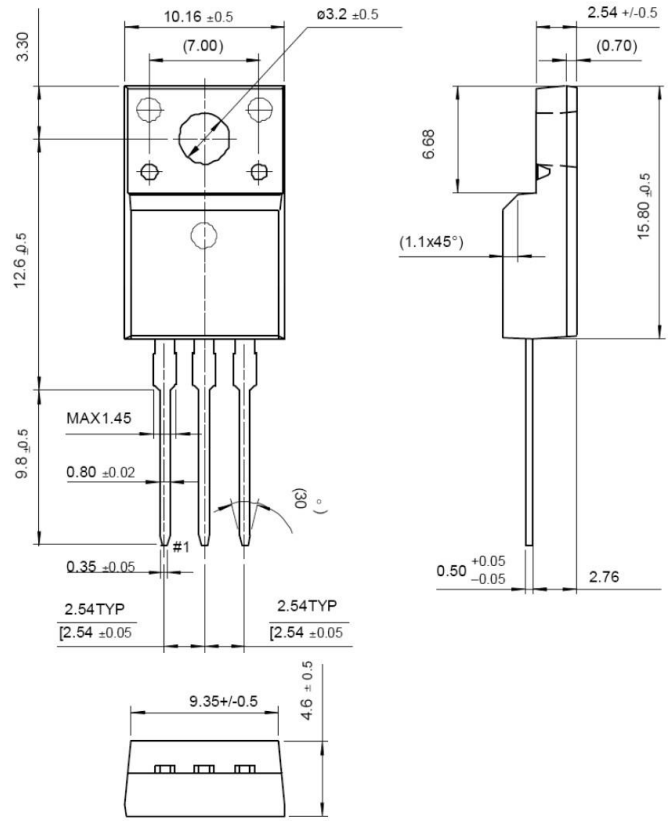

### Graphic symbol



**RoHS  
COMPLIANT**

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

### Absolute Maximum Ratings

Symbol	Parameter	Value	Unit
$V_{DSS}$	Drain-Source Voltage	600	V
$V_{GS}$	Gate-Source Voltage	±30	V
$I_D$	Drain Current -Continuous (TC=25°C)	15	A
	Drain Current -Continuous (TC=100°C)	9.5	A
$I_{DM}$	Drain Current Pulsed	60	A
$E_{AS}$	Single Pulsed Avalanche Energy	245	mJ
$I_{AR}$	Avalanche Current	15	A
$E_{AR}$	Repetitive Avalanche Energy	24	mJ
dV/dt	Peak Diode Recovery dV/dt	9.8	V/ns

## MSF15N60

### N-Channel Enhancement Mode Power MOSFET

#### Absolute Maximum Ratings

Symbol	Parameter	Value	Unit
P <sub>D</sub>	Total Power Dissipation (@TC = 25 °C) 60 W	53	W
	Derating Factor above 25 °C	0.42	W/°C

- Drain current limited by maximum junction temperature

#### Absolute Maximum Ratings (Tc=25°C unless otherwise noted)

Symbol	Parameter	Value	Unit
T <sub>L</sub>	Maximum Temperature for Soldering @ Lead at 0.125 in(0.318mm) from case for 10 seconds	300	°C
T <sub>STG</sub>	Operating Junction Temperature	-55 ~ 150	W
T <sub>J</sub>	Storage Temperature	150	°C

Note:

- 1.Repetitive rating; pulse width limited by maximum junction temperature.
2. IAS=15A, VDD=50V, L=0.5mH, RG=25Ω, starting TJ=+25°C.
3. ISD≤7.5A, dI/dt≤100A/μs, VDD≤BVDSS, starting TJ=+25°C.

#### Thermal characteristics

Symbol	Parameter	Max.	Units
R <sub>θJC</sub>	Thermal Resistance, Junction-to-Case	2.58	°C/W
R <sub>θJA</sub>	Thermal Resistance, Junction-to-Ambient	62.5	

#### Static Characteristics

Symbol	Parameter	Test Conditions	Min	Typ.	Max.	Units
V <sub>GS(th)</sub>	Gate Threshold Voltage	V <sub>DS</sub> =V <sub>GS</sub> , I <sub>D</sub> =250μA	2.0	--	4.0	V
R <sub>DS(ON)</sub>	Static Drain-Source On-Resistance	V <sub>GS</sub> =10V, I <sub>D</sub> =7.5A	--	0.42	0.52	Ω
BV <sub>DSS</sub>	Drain-Source Breakdown Voltage	V <sub>GS</sub> =0 V , I <sub>D</sub> =250μA T <sub>J</sub> =150°C	600	--	--	V
ΔBV <sub>DSS</sub> /ΔT <sub>J</sub>	Breakdown Voltage Temperature Coefficient	I <sub>D</sub> =250μA, Referenced to 25°C	--	0.7	--	V/°C
I <sub>DSS</sub>	Drain-Source Leakage Current	V <sub>DS</sub> =600V , V <sub>GS</sub> = 0 V V <sub>DS</sub> =480V , T <sub>C</sub> = 125°C	--	--	1 10	μA
I <sub>GSS</sub>	Gate-Body Leakage , Forward	V <sub>GS</sub> =±30	--	--	±100	nA

## MSF15N60

### N-Channel Enhancement Mode Power MOSFET

Dynamic Characteristics						
Symbol	Parameter	Test Conditions	Min	Typ.	Max.	Units
$t_{d(on)}$	Turn-On Time	$V_{DS}=250\text{ V}, I_D=15\text{ A},$ $V_{GS}=10\text{ V}, R_G=9.1\Omega$	--	50	101	ns
$t_r$	Turn-On Time		--	78	162	ns
$t_{d(off)}$	Turn-Off Delay Time		--	120	261	ns
$t_f$	Turn-Off Fall Time		--	66	128	ns
$Q_g$	Total Gate Charge	$V_{DS}=250\text{ V}, I_D=15\text{ A},$ $V_{GS}=10\text{ V}$	--	36	60	nC
$Q_{gs}$	Gate-Source Charge		--	9	--	nC
$Q_{gd}$	Gate-Drain Charge (Miller Charge)		--	16	--	nC

Dynamic Characteristics						
Symbol	Parameter	Test Conditions	Min	Typ.	Max.	Units
$C_{ISS}$	Input Capacitance	$V_{DS}=25\text{ V}, V_{GS}=0\text{ V},$ $f=1.0\text{ MHz}$	--	2270	3000	pF
$C_{OSS}$	Output Capacitance		--	300	405	pF
$C_{RSS}$	Reverse Transfer Capacitance		--	23	37	pF

Source-Drain Diode Maximum Ratings and Characteristics						
Symbol	Parameter	Test Conditions	Min	Typ.	Max.	Units
$I_S$		$V_D=V_G=0,$ $V_S=1.3\text{ V}$	--	--	14	A
$I_{SM}$			--	--	60	
$V_{SD}$		$I_S=12\text{ A}, V_{GS}=0\text{ V}$	--	--	1.4	V
$t_{rr}$		$I_S=12\text{ A}, V_{GS}=0\text{ V}$	--	600	--	ns
$Q_{rr}$		$diF/dt=100\text{ A}/\mu\text{s}$	--	7.2	--	$\mu\text{C}$

## MSF15N60

### N-Channel Enhancement Mode Power MOSFET

#### ■ Characteristics Curve

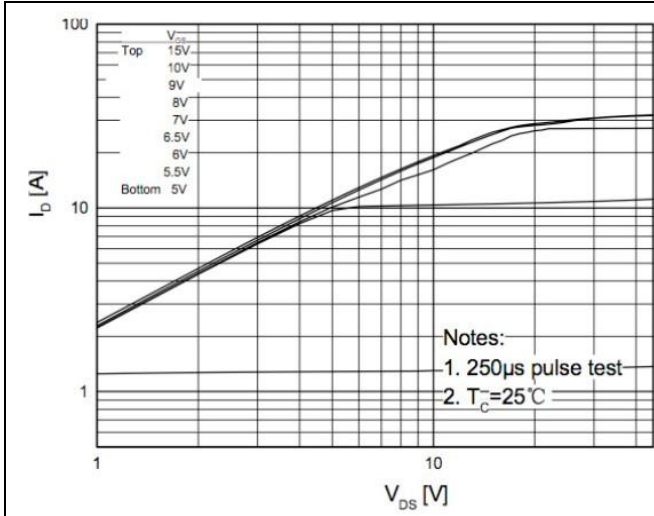


FIG.1-ON REGION CHARACTERISTICS

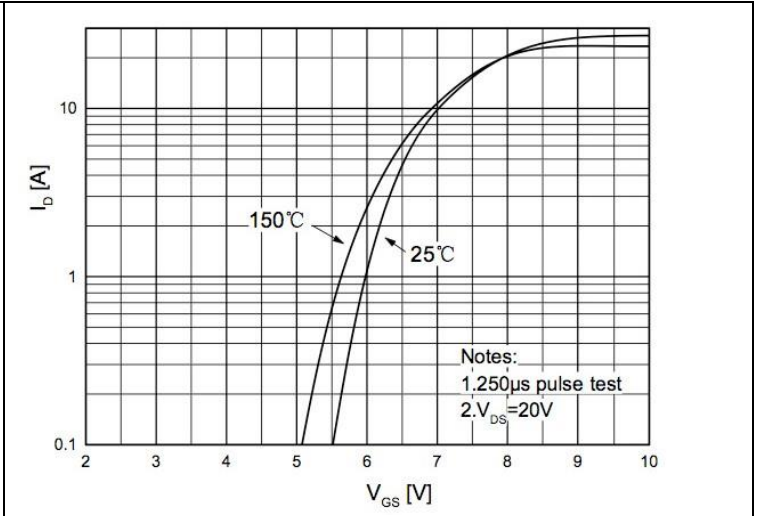


FIG.2-TRANSFER CHARACTERISTICS

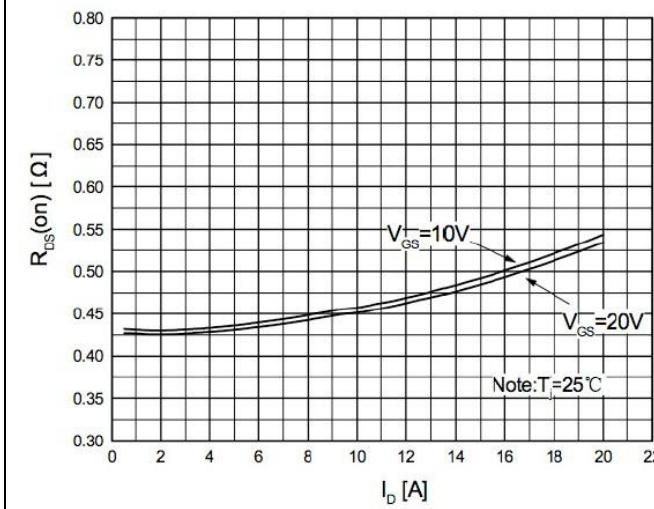


FIG.3-ON RESISTANCE VARIATION VS DRAIN CURRENT AND GATE VOLTAGE

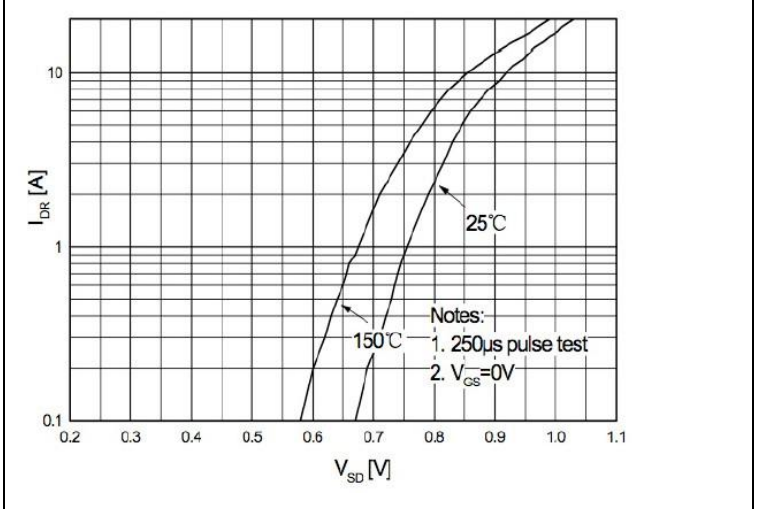


FIG.4-BODY DIODE FORWARD VOLTAGE VARIATION WITH SOURCE CURRENT AND TEMPERATURE

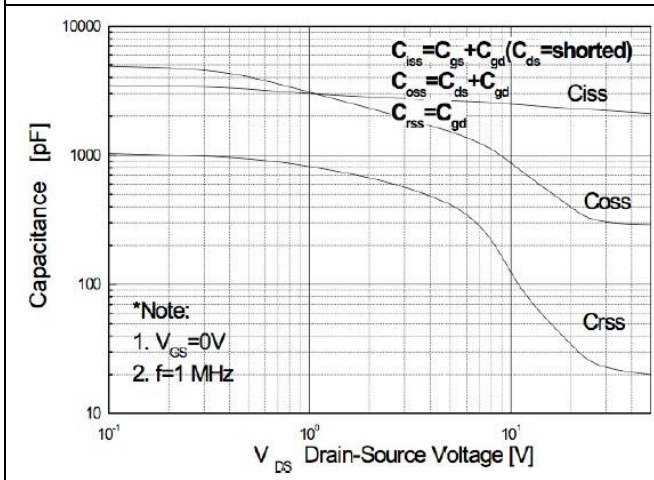


FIG.5-CAPACITANCE CHARACTERISTICS


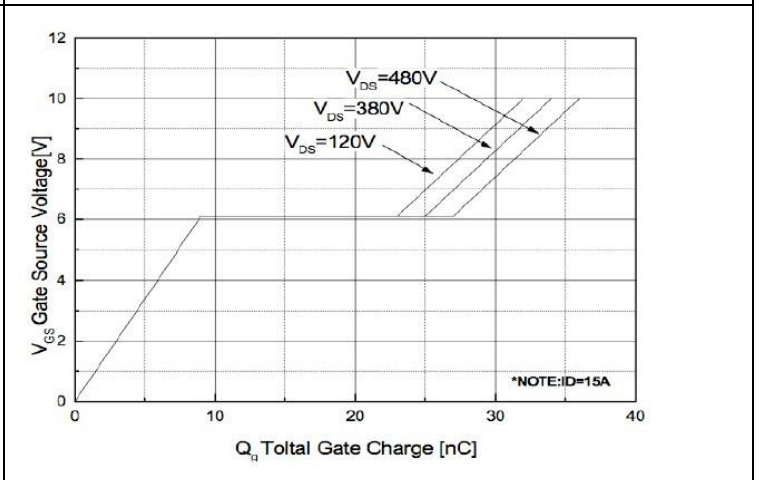


FIG.6-GATE CHARGE CHARACTERISTICS


## MSF15N60

### N-Channel Enhancement Mode Power MOSFET


#### ■ Characteristics Curve

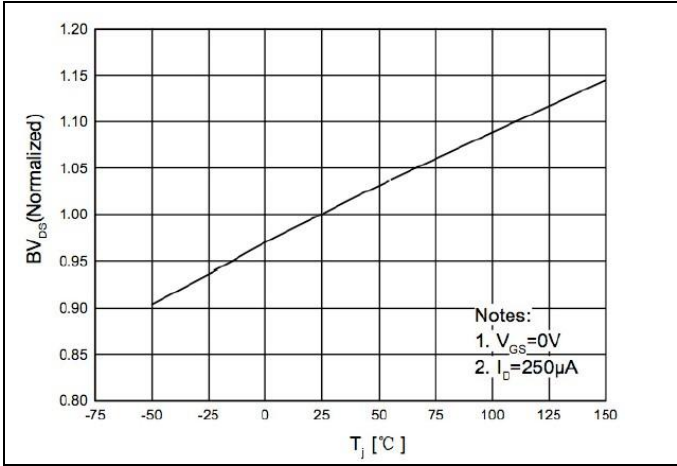


**FIG.7-BREAKDOWN VOLTAGE VARIATION VS TEMPERATURE**

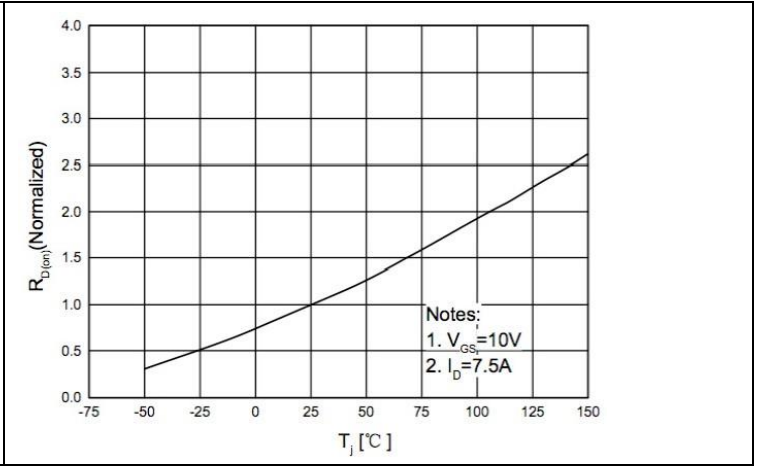


**FIG.8-ON-RESISTANCE VARIATION VS TEMPERATURE**

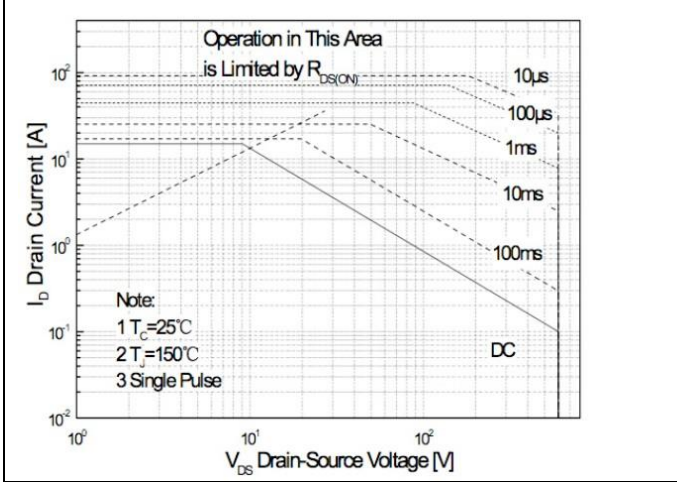

**FIG.9-MAXIMUM SAFE OPERATING AREA**

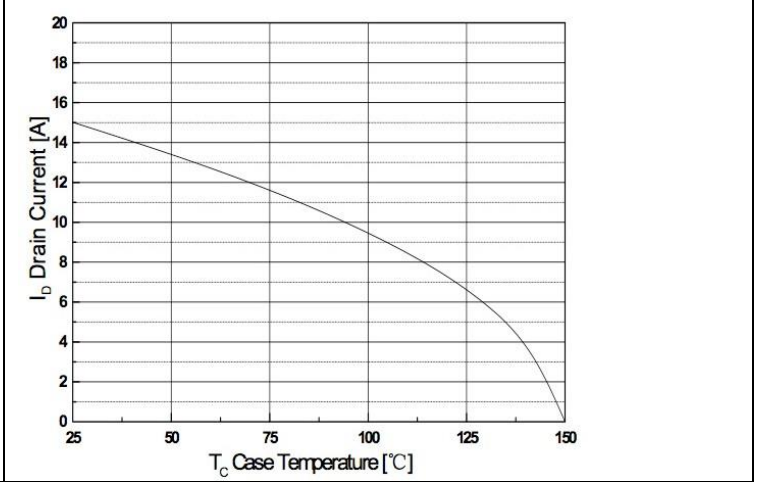

**FIG.10-MAXIMUM DRAIN CURRENT VS CASE TEMPERATURE**

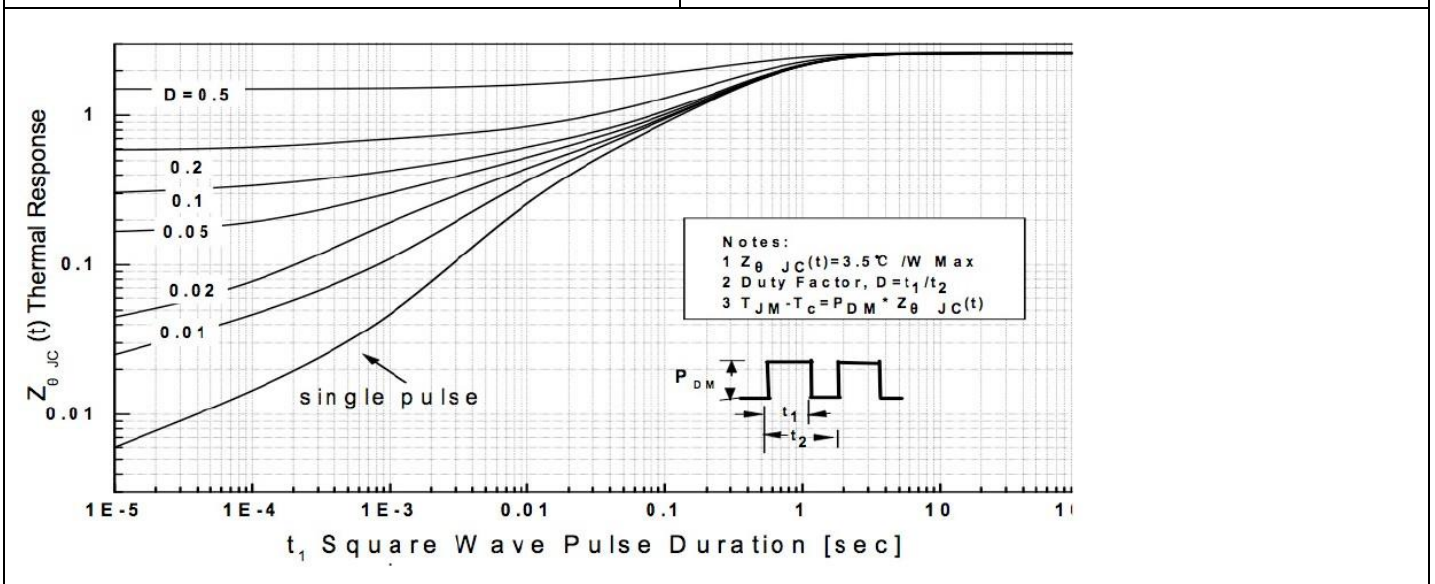

**FIG.11-TRANSIENT THERMAL RESPONSE CURVE**

## MSF15N60

### N-Channel Enhancement Mode Power MOSFET

#### Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE

WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Bruckewell Technology Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Bruckewell"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Bruckewell makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Bruckewell disclaims

- (i) Any and all liability arising out of the application or use of any product.
- (ii) Any and all liability, including without limitation special, consequential or incidental damages.
- (iii) Any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Bruckewell's knowledge of typical requirements that are often placed on Bruckewell products in generic applications.

Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time.

Product specifications do not expand or otherwise modify Bruckewell's terms and conditions of purchase, including but not limited to the warranty expressed therein.