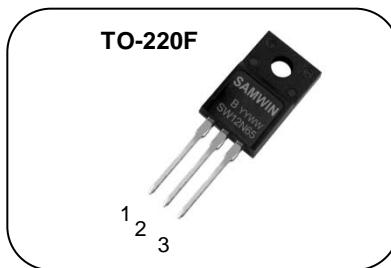
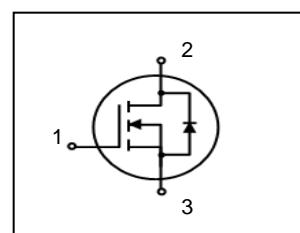


**N-channel TO-220F MOSFET****Features**

- High ruggedness
- $R_{DS(ON)}$  (Max 0.85 Ω) @  $V_{GS}=10V$
- Gate Charge (Typical 28nC)
- Improved dv/dt Capability
- 100% Avalanche Tested

**1. Gate 2. Drain 3. Source**

**$BV_{DSS}$  : 650V**  
 **$I_D$  : 12.0A**  
 **$R_{DS(ON)}$  : 0.85ohm**

**General Description**

This power MOSFET is produced with advanced VDMOS technology of SAMWIN. This technology enable power MOSFET to have better characteristics, such as fast switching time, low on resistance, low gate charge and especially excellent avalanche characteristics. It is mainly suitable for half bridge or full bridge resonant topology like a electronic ballast, and also low power switching mode power appliances.

**Order Codes**

Item	Sales Type	Marking	Package	Packaging
1	SW F 12N65B	SW12N65	TO-220F	TUBE

**Absolute maximum ratings**

Symbol	Parameter	Value	Unit
$V_{DSS}$	Drain to Source Voltage	650	V
$I_D$	Continuous Drain Current (@ $T_C=25^\circ C$ )	12.0*	A
	Continuous Drain Current (@ $T_C=100^\circ C$ )	7.6*	A
$I_{DM}$	Drain current pulsed (note 1)	48	A
$V_{GS}$	Gate to Source Voltage	$\pm 30$	V
$E_{AS}$	Single pulsed Avalanche Energy (note 2)	790	mJ
$E_{AR}$	Repetitive Avalanche Energy (note 1)	104	mJ
dv/dt	Peak diode Recovery dv/dt (note 3)	4.5	V/ns
$P_D$	Total power dissipation (@ $T_C=25^\circ C$ )	54	W
	Derating Factor above 25°C	0.43	W/°C
$T_{STG}, T_J$	Operating Junction Temperature & Storage Temperature	-55 ~ + 150	°C
$T_L$	Maximum Lead Temperature for soldering purpose, 1/8 from Case for 5 seconds.	300	°C

\*. Drain current is limited by junction temperature.

**Thermal characteristics**

Symbol	Parameter	Value	Unit
$R_{thjc}$	Thermal resistance, Junction to case	2.3	°C/W
$R_{thcs}$	Thermal resistance, Case to Sink	-	°C/W
$R_{thja}$	Thermal resistance, Junction to ambient	45.3	°C/W

Electrical characteristic (  $T_C = 25^\circ\text{C}$  unless otherwise specified )

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
<b>Off characteristics</b>						
$\text{BV}_{\text{DSS}}$	Drain to source breakdown voltage	$V_{\text{GS}}=0\text{V}, I_D=250\mu\text{A}$	650			V
$\Delta \text{BV}_{\text{DSS}} / \Delta T_J$	Breakdown voltage temperature coefficient	$I_D=250\mu\text{A}$ , referenced to $25^\circ\text{C}$		0.8		$^\circ\text{C}$
$I_{\text{DSS}}$	Drain to source leakage current	$V_{\text{DS}}=650\text{V}, V_{\text{GS}}=0\text{V}$			1	$\mu\text{A}$
		$V_{\text{DS}}=520\text{V}, T_C=125^\circ\text{C}$			50	$\mu\text{A}$
$I_{\text{GSS}}$	Gate to source leakage current, forward	$V_{\text{GS}}=30\text{V}, V_{\text{DS}}=0\text{V}$			100	nA
	Gate to source leakage current, reverse	$V_{\text{GS}}=-30\text{V}, V_{\text{DS}}=0\text{V}$			-100	nA
<b>On characteristics</b>						
$V_{\text{GS(TH)}}$	Gate threshold voltage	$V_{\text{DS}}=V_{\text{GS}}, I_D=250\mu\text{A}$	2.0		4.0	V
$R_{\text{DS(ON)}}$	Drain to source on state resistance	$V_{\text{GS}}=10\text{V}, I_D = 6\text{A}$		0.7	0.85	$\Omega$
$G_f$	Forward Transconductance	$V_{\text{DS}} = 20 \text{ V}, I_D = 6 \text{ A}$	7			S
<b>Dynamic characteristics</b>						
$C_{\text{iss}}$	Input capacitance	$V_{\text{GS}}=0\text{V}, V_{\text{DS}}=25\text{V}, f=1\text{MHz}$		1450		pF
$C_{\text{oss}}$	Output capacitance			160		
$C_{\text{rss}}$	Reverse transfer capacitance			35		
$t_{d(\text{on})}$	Turn on delay time	$V_{\text{DS}}=325\text{V}, I_D=12\text{A}, R_G=25\Omega$ (note 4, 5)		23	60	ns
$t_r$	Rising time			38	80	
$t_{d(\text{off})}$	Turn off delay time			63	130	
$t_f$	Fall time			36	80	
$Q_g$	Total gate charge	$V_{\text{DS}}=520\text{V}, V_{\text{GS}}=10\text{V}, I_D=12\text{A}$ (note 4, 5)		28	50	nC
$Q_{\text{gs}}$	Gate-source charge			9		
$Q_{\text{gd}}$	Gate-drain charge			9		

## Source to drain diode ratings characteristics

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
$I_s$	Continuous source current	Integral reverse p-n Junction diode in the MOSFET			12	A
$I_{\text{SM}}$	Pulsed source current				48	A
$V_{\text{SD}}$	Diode forward voltage drop.	$I_s=12\text{A}, V_{\text{GS}}=0\text{V}$			1.5	V
$T_{\text{rr}}$	Reverse recovery time	$I_s=12\text{A}, V_{\text{GS}}=0\text{V},$ $dI_F/dt=100\text{A}/\mu\text{s}$		456		ns
$Q_{\text{rr}}$	Reverse recovery Charge			6.2		$\mu\text{C}$

※. Notes

- Repetitive rating : pulse width limited by junction temperature.
- $L = 11\text{mH}, I_{\text{AS}} = 12\text{A}, V_{\text{DD}} = 50\text{V}, R_G=25\Omega$ , Starting  $T_J = 25^\circ\text{C}$
- $I_{\text{SD}} \leq 12.0\text{A}, dI/dt = 100\text{A}/\mu\text{s}, V_{\text{DD}} \leq \text{BV}_{\text{DSS}}$ , Starting  $T_J = 25^\circ\text{C}$
- Pulse Test : Pulse Width  $\leq 300\text{\mu s}$ , duty cycle  $\leq 2\%$
- Essentially independent of operating temperature.

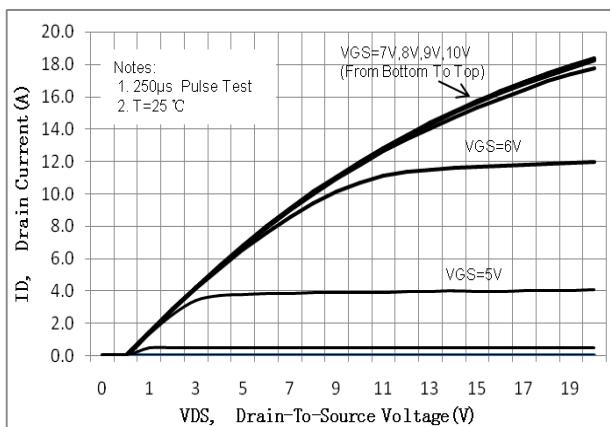
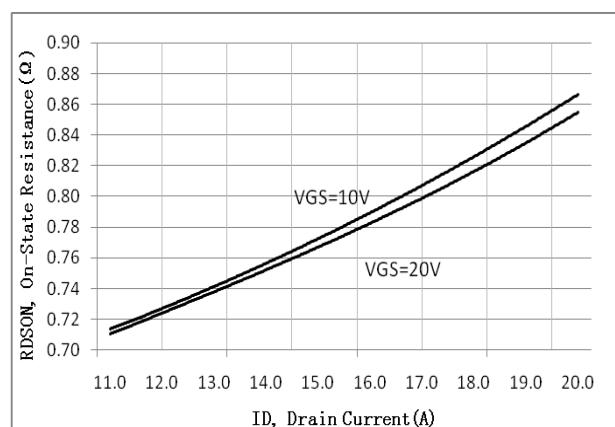
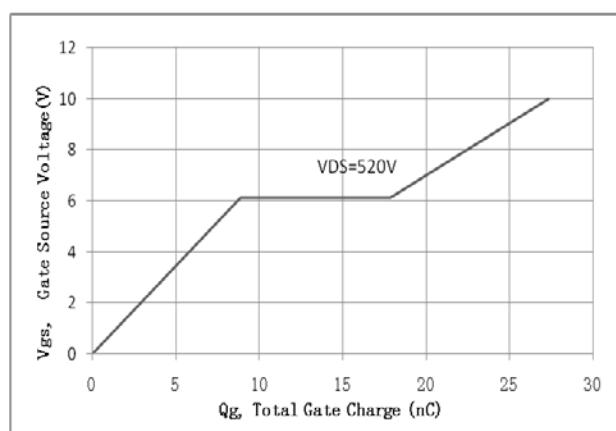
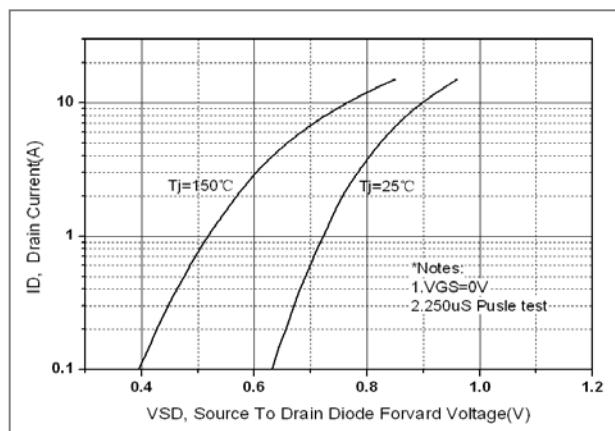
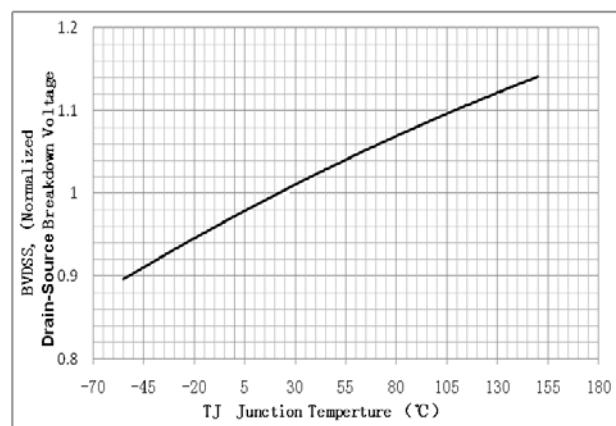
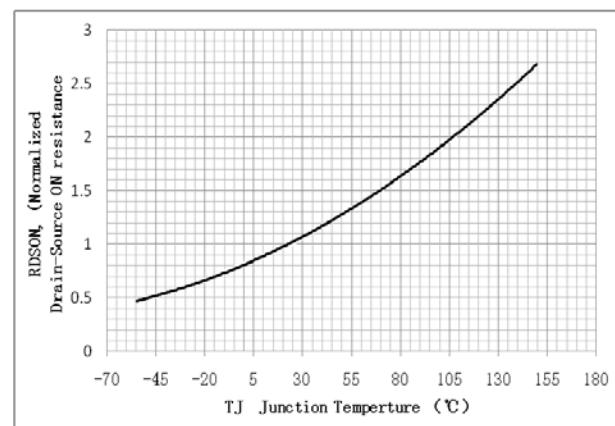
**Fig. 1. On-state characteristics****Fig. 2. On-resistance variation vs. drain current and gate voltage****Fig. 3. Gate charge characteristics****Fig. 4. On state current vs. diode forward voltage****Fig 5. Breakdown Voltage Variation vs. Junction Temperature****Fig. 6. On resistance variation vs. junction temperature**

Fig. 7. Maximum safe operating area

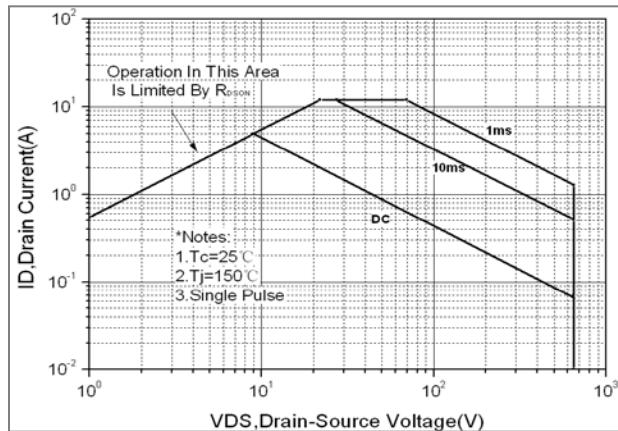


Fig. 8. Transient thermal response curve

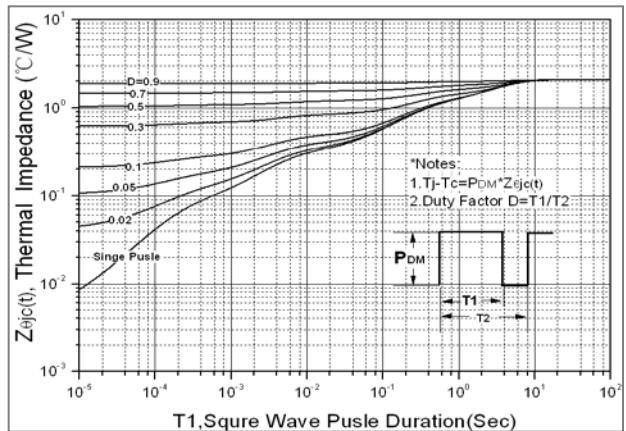


Fig. 9. Gate charge test circuit &amp; waveform

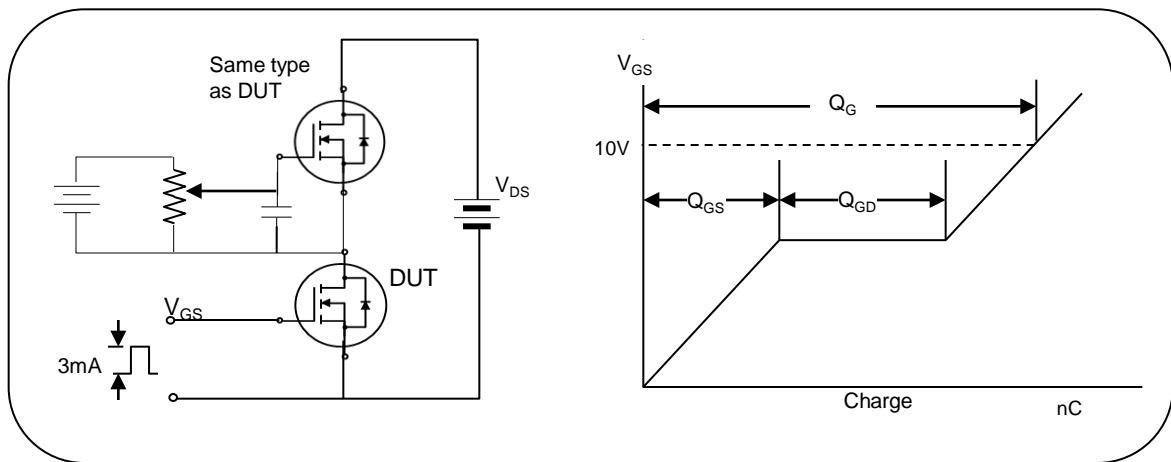


Fig. 10. Switching time test circuit &amp; waveform

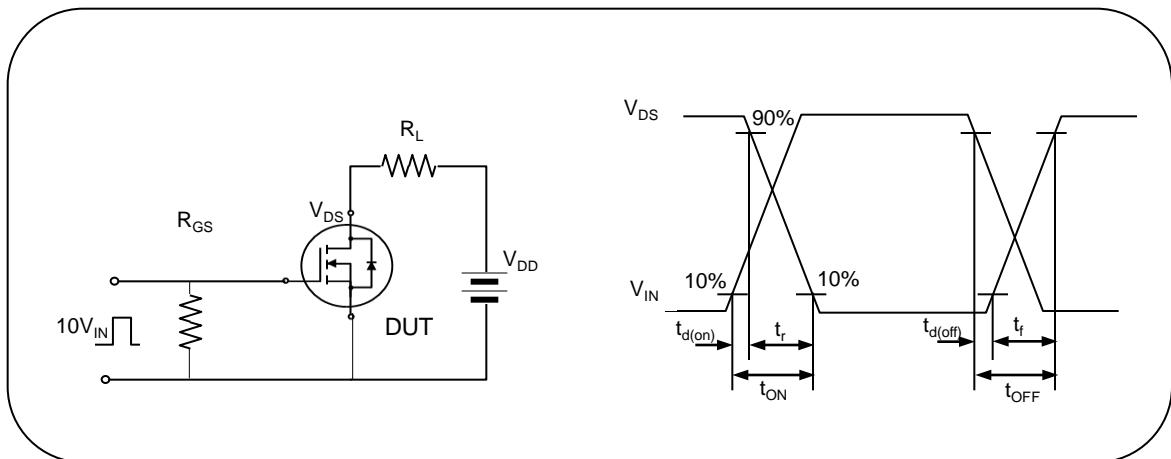


Fig. 11. Unclamped Inductive switching test circuit &amp; waveform

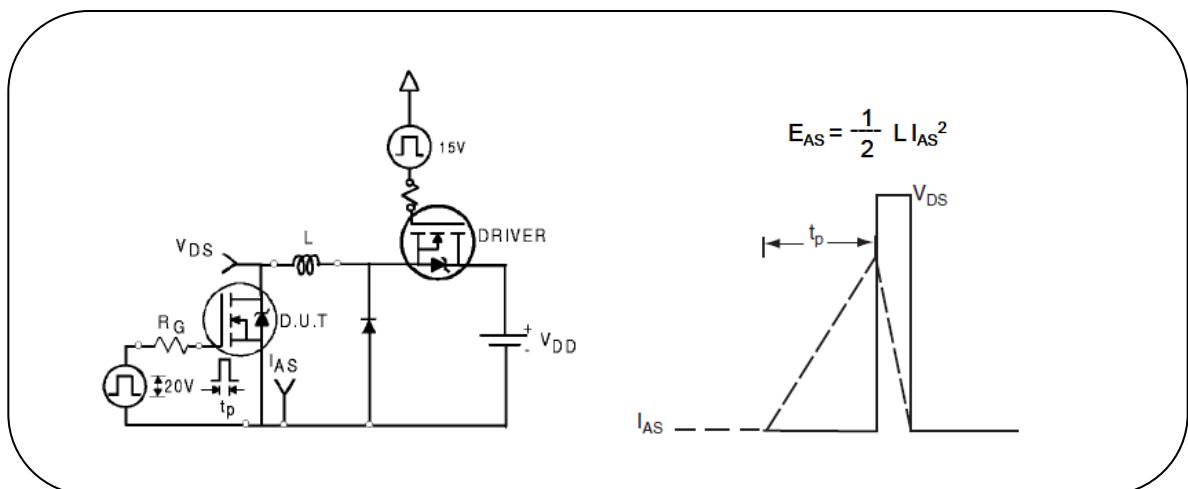


Fig. 12. Peak diode recovery dv/dt test circuit &amp; waveform

