

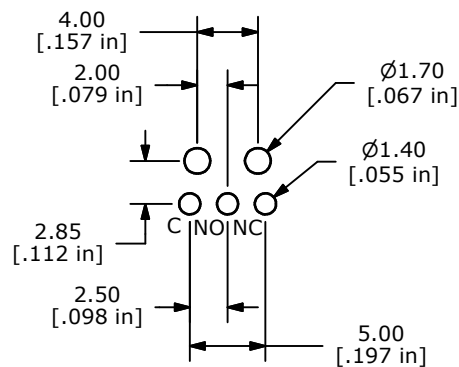
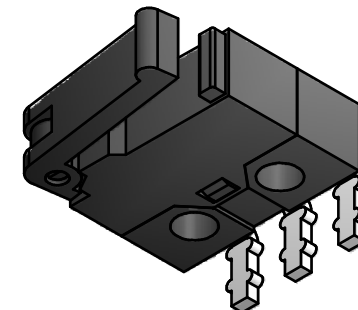


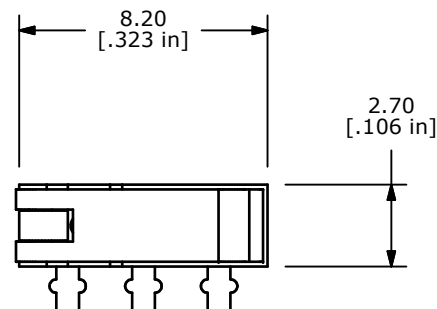

PCB LAYOUT




| ▲ O.P. (MM) | P.T. (MM) |
|-------------|-----------|
| 6.7 ±0.5    | 1.8 Max.  |

O.P. = OPERATING POINT  
P.T. = PRE-TRAVEL

## NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4  
X.XX=±0.25
3. RATING: 0.3A @ 6VDC
4. OPERATING FORCE: 20 ± 10 GRAMS
5. OPERATING TEMP: -25°C TO 85°C
6. ELECTRICAL LIFE: 50,000 CYCLES MIN.
7. INSULATION RESISTANCE: 100 MEGA-OHMS MIN.
8. DIELECTRIC STRENGTH: 250VAC 1 MINUTE (INITIAL VALUE)
9. CONTACT RESISTANCE: 50 MILLI -OHMS MAX.
10. ▲ DENOTES CRITICAL PARAMETER.
11. 2002/95/EC (ROHS) COMPLIANT

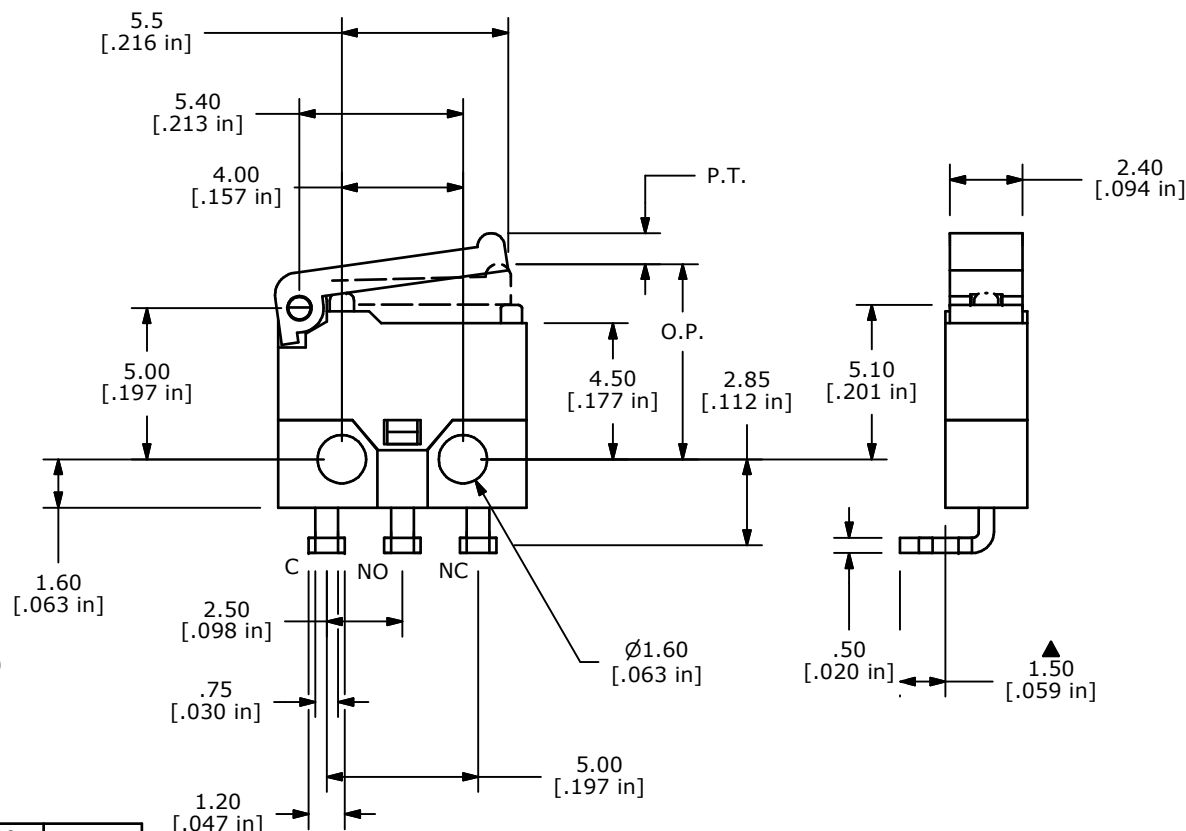

|     |        |                                |         |     |
|-----|--------|--------------------------------|---------|-----|
| D   | 18561  | BODY CHANGED TO ADD STOP       | 6/18/09 | BLR |
| C   | 18269  | TITLE CHANGE FROM TS0101F030V1 | 10/6/08 | BLR |
| B   | 17974  | CHANGE OPERATING FORCE SPEC    | 2/15/08 | BLR |
| A   | 17918  | New Product Release            | 1/8/08  | rc  |
| REV | PCR NO | DESCRIPTION                    | DATE    | BY  |

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY  
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED



TITLE TS0101F020V1

SCALE 4=1

DATE 6/18/2009

DR BLR

DWG Q980003

REV D