

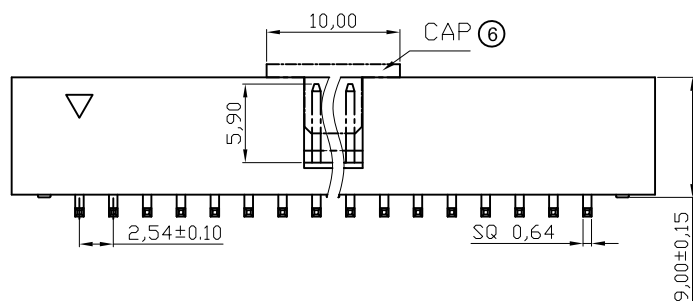


Recommended P.C.B Layout(Top Side)  
(PCB BOARD TOLERANCE±0.05)

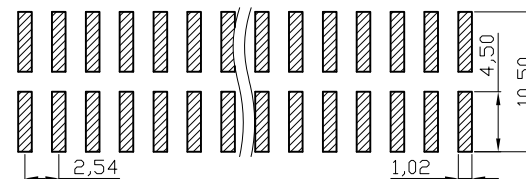

**NOTES:**

**MATERIAL**

- 1. Insulator Material: PA6T+30%GF(UL94V-0), Black
- 2. Contact Material : Brass
- 3. Contact Plating : Gold flash

**ELECTRICAL**

- 1. Current Rating : 3.0AMP
- 2. Withstand Voltage : 1000V AC/minute
- 3. Contact Resistance : 20mΩ max
- 4. Insulation Resistance: 1000MΩ min

**ENVIRONMENTAL**

- 1. Operation Temperature: -40°C to +105°C
- 2. Packing: Tube+Cap
- ⑤ 3. Soldering temperature: +260°C(10s)

**Order Information**

Contacts xx: 06,08,10,12,14,16,18,20,24  
26,30,34,50,60,64

RoHS compliant



| Scale     | Free  | ⑧   | Update the correct part number | 11.02.2014 | Amy    |          | Date       | Name | Customer-No.                               |
|-----------|-------|-----|--------------------------------|------------|--------|----------|------------|------|--------------------------------------------|
| TOLERANCE |       | ⑦   | Add UL-File No                 | 12.12.2013 | Winnie | Drawn    | 25.01.2006 | Alex | ASSMANN WSW-No.<br>⑧ AWHW xxG-SMD          |
| X.X       | ±0.40 | ⑥   | Modification the cap           | 07.11.2012 | Amy    | Approved | 11.02.2014 | Amy  |                                            |
| X.XX      | ±0.25 | ⑤   | add soldering temperature      | 09.12.2011 | Lucas  |          |            |      | Drawing-No.<br><b>ASS 2316 CO</b><br>rev08 |
| X.XXX     | ±0.15 | ④   | Corrected insulator material   | 29.10.2009 | Dean   |          |            |      |                                            |
| Angle     | ±3°   | ③   | Update                         | 30.06.2009 | Dean   |          |            |      | Replace                                    |
|           |       | Id. | Modification                   | Date       | Name   |          |            |      |                                            |



ASS 2316 CO

rev08

Replace

Sheet