

CMOS HS-370 Series

Rev. J

Description




The **HS-370 Series** of quartz crystal oscillators are resistance welded in an all metal package, offering RFI shielding, and are designed to survive standard wave soldering operations without damage. Insulated standoffs to enhance board cleaning are standard.

Features

- Wide frequency range—0.5MHz to 85.0MHz
- User specified tolerance available
- Will withstand vapor phase temperatures of 253°C for 4 minutes maximum
- Space-saving alternative to discrete component oscillators
- High shock resistance, to 3000g
- All metal, resistance weld, hermetically sealed package
- Low Jitter
- High Q Crystal actively tuned oscillator circuit
- Power supply decoupling internal
- No internal PLL avoids cascading PLL problems
- High frequencies due to proprietary design
- Gold plated leads - Solder dipped leads available upon request

Electrical Connection

| Pin | Connection |
|-----|-----------------|
| 1 | N.C. |
| 7 | Grd & Case |
| 8 | Output |
| 14 | V _{DD} |

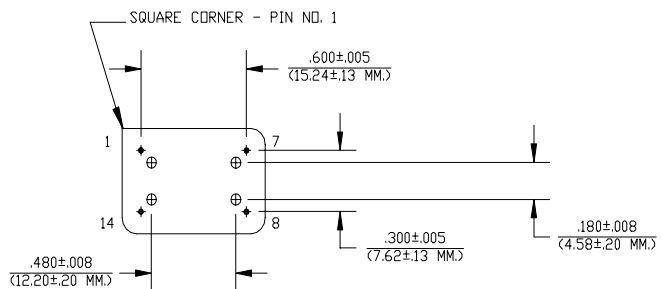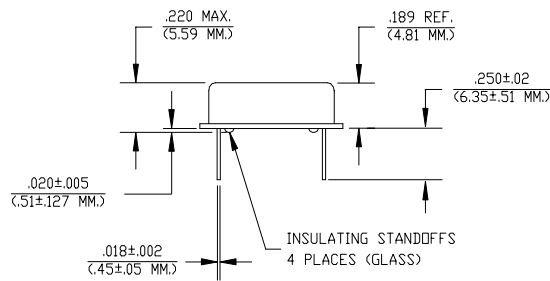

HS-370 Series Continued
CMOS

Rev. J

Operating Conditions and Output Characteristics

Electrical Characteristics

| Parameter | Symbol | Conditions | Min | Typical | Max |
|------------------------------------|----------|--|---------------|---------|---------|
| Frequency | ---- | ---- | 0.5MHz | ---- | 85.0MHz |
| Duty Cycle | ---- | @ $V_{DD}/2$ | 45/55% | ---- | 55/45% |
| Logic 0 | V_{OL} | @ 600 μ A | ---- | ---- | 0.2V |
| Logic 1 | V_{OH} | @ 600 μ A | $V_{DD}-0.2V$ | ---- | ---- |
| Rise & Fall Time | tr,tf | 10-90% V_O | ---- | ---- | 8.0 ns |
| | | <40MHz | ---- | ---- | 4.0 ns |
| | | 40MHz or greater | ---- | ---- | 8 psec |
| Jitter, RMS ⁽²⁾ | ---- | <40MHz Fund | ---- | ---- | 5 psec |
| | | <40MHz OT & >40MHz | ---- | ---- | +100ppm |
| Frequency Stability ⁽¹⁾ | dF/F | Overall conditions including: voltage, calibration, temp., 10 yr aging, shock, vibration | -100ppm | ---- | ---- |

General Characteristics

| Parameter | Symbol | Conditions | Min | Typical | Max |
|-----------------------|----------|--------------------|--------|---------|---------------|
| Supply Voltage | V_{DD} | ---- | 4.75V | 5.0V | 5.25V |
| Supply Current | I_{DD} | No Load | 0.0 mA | ---- | 50 mA |
| Output current | I_O | ---- | 0.0 mA | ---- | ± 16.0 mA |
| Operating temperature | T_A | ---- | 0°C | ---- | 70°C |
| Storage temperature | T_S | ---- | -55°C | ---- | 125°C |
| Power Dissipation | P_D | ---- | ---- | ---- | 263 mW |
| Lead temperature | T_L | Soldering, 10 sec. | ---- | ---- | 300°C |
| Load | ---- | ---- | ---- | ---- | 15pf |
| Start-up Time | t_s | <20MHz | ---- | ---- | 2 ms |
| | | 20MHz or greater | ---- | ---- | 10 ms |

Environmental and Mechanical Characteristics

| | |
|---------------------|---|
| Mechanical Shock | Per MIL-STD-202, Method 213, Condition E |
| Thermal Shock | Per MIL-STD-833, Method 1011, Condition A |
| Vibration | 0.060" double amplitude 10 Hz to 55 Hz, 35g's 55Hz to 2000 Hz |
| Soldering Condition | 300°C for 10 seconds |
| Hermetic Seal | Leak rate less than 1×10^{-8} atm.cc/sec of helium |

Footnotes:

- Standard frequency stability ($\pm 20, \pm 25, \pm 50$ ppm & others available)
- Jitter performance is frequency dependent. Please contact factory for full characterization.

| Creating a Part Number | |
|------------------------------|------------------------------|
| HS - A37X - FREQ | |
| Package Code | Tolerance/Performance |
| HS Ledged 4 pin (14 pin) | 0 ± 100 ppm 0-70°C |
| SM Ledged 4 pin (14 pin) SMD | 1 ± 50 ppm 0-70°C |
| Gull Wing | 7 ± 25 ppm 0-70°C |
| Input Voltage | 9 Customer Specific |
| Code Specification | A ± 20 ppm 0-70°C |
| A 3.3V | B ± 50 ppm -40 to +85°C |
| 5V | C ± 100 ppm -40 to +85°C |

Test Load:

