

FAST RECOVERY RECTIFIER


VOLTAGE RANGE 50 to 100 Volts CURRENT 2.0 Amperes

FEATURES

- * Fast switching
- * Low leakage
- * Low forward voltage drop
- * High current capability
- * High current surge
- * High reliability

MECHANICAL DATA

- * Case: Molded plastic
- * Epoxy: Device has UL flammability classification 94V-0
- * Lead: MIL-STD-202E method 208C guaranteed
- * Mounting position: Any
- * Weight: 0.38 gram

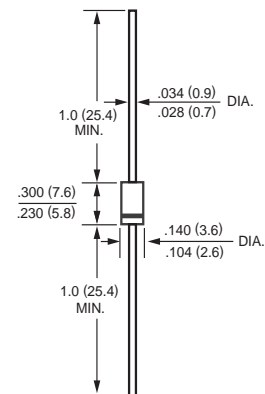

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25 °C ambient temperature unless otherwise specified.
Single phase, half wave, 60 Hz, resistive or inductive load.
For capacitive load, derate current by 20%.

MAXIMUM RATINGS (At TA = 25°C unless otherwise noted)

| RATINGS | SYMBOL | FR201 | FR202 | FR203 | FR204 | FR205 | FR205P | FR206 | FR207 | FR207P | UNITS | |
|---|-----------------------------------|-------|-------|-------|-------|-------|--------------|-------|-------|--------|-------|------|
| Maximum Recurrent Peak Reverse Voltage | V _{RRM} | 50 | 100 | 200 | 400 | 600 | 600 | 800 | 1000 | 1000 | Volts | |
| Maximum RMS Voltage | V _{RMS} | 35 | 70 | 140 | 280 | 420 | 420 | 560 | 700 | 700 | Volts | |
| Maximum DC Blocking Voltage | V _{DC} | 50 | 100 | 200 | 400 | 600 | 600 | 800 | 1000 | 1000 | Volts | |
| Maximum Average Forward Rectified Current at TA = 75°C | I _O | | | | | | 2.0 | | | | | Amps |
| Peak Forward Surge Current 8.3 ms single half sine-wave superimposed on rated load (JEDEC method) | I _{FSM} | | | | | | 70 | | | | | Amps |
| Typical Junction Capacitance (Note 2) | C _J | | | | | | 40 | | | | | pF |
| Operating and Storage Temperature Range | T _J , T _{STG} | | | | | | -55 to + 150 | | | | | °C |

ELECTRICAL CHARACTERISTICS (At TA = 25°C unless otherwise noted)

| CHARACTERISTICS | SYMBOL | FR201 | FR202 | FR203 | FR204 | FR205 | FR205P | FR206 | FR207 | FR207P | UNITS | |
|--|-----------------|-------|-------|-------|-------|-------|--------|-------|-------|--------|-------|-------|
| Maximum Instantaneous Forward Voltage at 2.0A DC | V _F | | | | | | 1.3 | | | | | Volts |
| Maximum DC Reverse Current at Rated DC Blocking Voltage TA = 25°C | I _R | | | | | | 5.0 | | | | | uAmps |
| Maximum Full Load Reverse Current Full Cycle Average, .375" (9.5mm) lead length at TL = 55°C | | | | | | | 100 | | | | | uAmps |
| Maximum Reverse Recovery Time (Note 1) | t _{rr} | 150 | | | 250 | | 150 | 500 | 250 | | nSec | |

NOTES : 1. Test Conditions: I_F = 0.5A, I_R = -1.0A, I_{RR} = -0.25A

2. Measured at 1 MHz and applied reverse voltage of 4.0 volts

RATING AND CHARACTERISTIC CURVES (FR201 THRU FR207)

FIG. 1 - TYPICAL FORWARD CURRENT DERATING CURVE

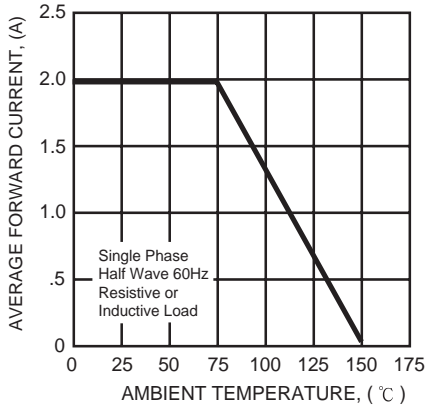


FIG. 2 - MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

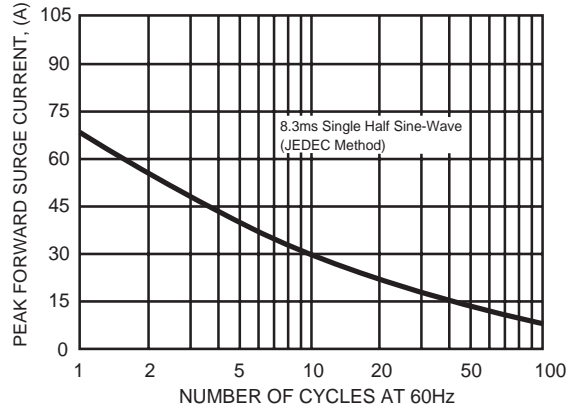


FIG. 3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

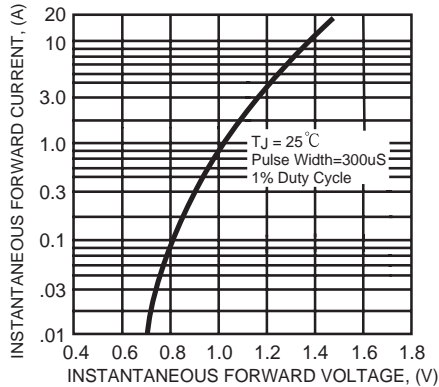


FIG. 4 - TYPICAL JUNCTION CAPACITANCE


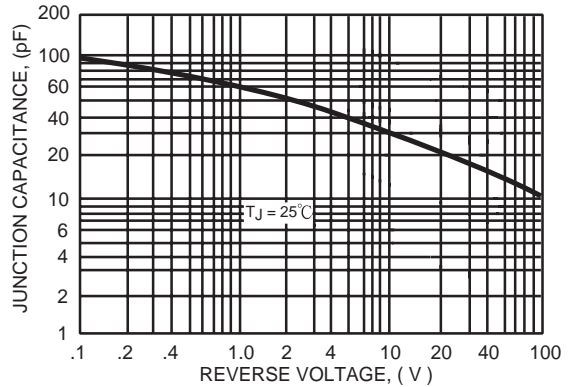


FIG. 5 - TEST CIRCUIT DIAGRAM AND REVERSE RECOVERY TIME CHARACTERISTIC

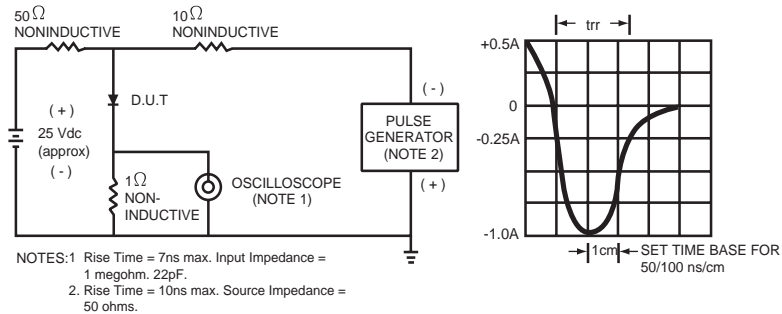

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Rectron:

[FR207P-T](#) [FR207P-B](#) [FR207-T](#) [FR203-T](#) [FR206-T](#) [FR206-B](#) [FR203-B](#) [FR205-B](#) [FR202-B](#) [FR201-B](#) [FR204-B](#)
[FR207-B](#) [FR204-T](#) [FR205P-T](#) [FR205P-B](#) [FR201-T](#) [FR205-T](#) [FR202-T](#) [FR201](#) [FR202](#) [FR203](#) [FR204](#) [FR205](#)
[FR206](#) [FR207](#)