


SAW Filter

F5KY878M0B4ND

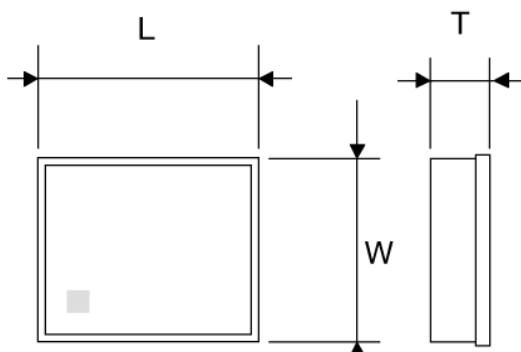

■ Features

- Item Summary
CDMA2000 BC0+10 , Rx, 504
- Lifecycle Stage
Mass Production
- Standard packaging quantity (minimum)
Taping Embossed 3000 , 15000pcs

■ Products characteristics table

Temperature Range	-30 to +85°C
Band(3GPP2)	BC0 / BC10
Use	CDMA
Transmitting / Receiving	Rx Filter
Insertion Loss	2.1 dB
Attenuation	53dB
RoHS Compliance	Yes
Halogen Free	Yes
Soldering Method	Reflow

■ External Dimensions

L	1.4mm +0.1:-0.1
W	1mm +0.1:-0.1
T	0.5mm max

2015.06.03

The data is reference only. Electrical characteristics vary depending on environment or measurement condition.
 TAIYO YUDEN reserves the right to make change to the Date at any time without notice.
 Before making final selection, please check product specification.



MSL1

* Pb Free Part

Customer Name	Standard specification	TAIYO YUDEN Mobile Technology Co.,Ltd.	
System	3GPP2 BC0+BC10 Rx (50/100ohm)	DATE	June 30, 2010
Part Number	F5KY878M0B4ND	Version 1.0 a	

Table 1. Electrical specifications

Item	Condition	Specification			Unit	Remark
		Min.	Typ.	Max.		
Insertion Loss	862 - 894 MHz	-	2.1	2.8	dB(*1)	
Ripple	862 - 894 MHz	-	0.8	1.6	dB	
Absolute Attenuation	DC - 817 MHz	40	62	-	dB	
	817 - 849 MHz	46	53	-	dB	
	1724 - 1788 MHz	40	70	-	dB	
	1850 - 1910 MHz	40	68	-	dB	
	1920 - 6000 MHz	35	50	-	dB	
VSWR(Input)	862 - 894 MHz	-	1.8	2.2	-	
VSWR(Output)	862 - 894 MHz	-	1.8	2.2	-	
Amplitude Balance (S ₂₁ /S ₃₁)	862 - 894 MHz	-1	-0.4/ +0.2	+1	dB	
Phase Balance (∠S ₂₁ -∠S ₃₁ +180)	862 - 894 MHz	-10	-2/+3	+10	deg.	
Input Level		-	-	15	dBm	
Input Impedance		50			ohm	
Output Impedance		100			ohm	
Device Size		1.4typ. x 1.0typ. x 0.5max.			mm	
Operating temp.		-30 ~ +85			°C	

(*1) Specification of insertion loss includes loss that comes from the test board.(0.05dB)




MSL1

* Pb Free Part

Customer Name	Standard specification	TAIYO YUDEN Mobile Technology Co.,Ltd.	
System	3GPP2 BC0+BC10 Rx (50/100ohm)	DATE	June 30, 2010
Part Number	F5KY878M0B4ND	Version 1.0 a	

Dimensions

Device size: 1.4typ. x 1.0typ. x 0.5max

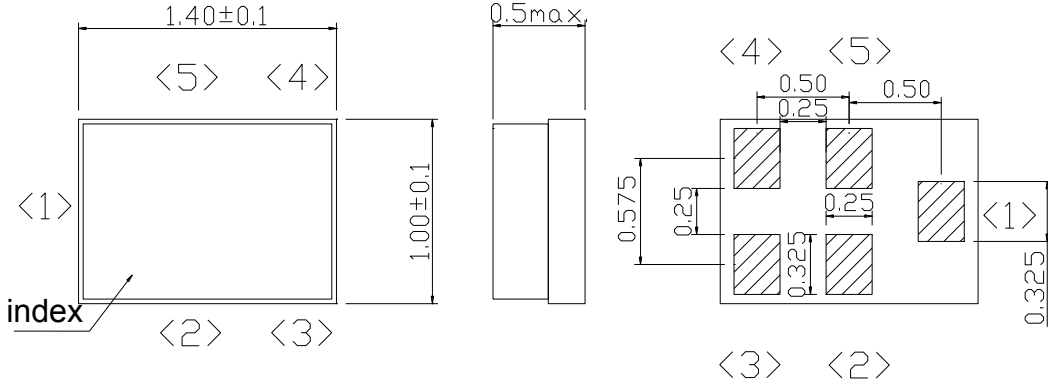


Unit : mm

Pin Configuration

Pin No.	Symbol	Function
1	IN	Unbalanced pin
2	GND	Ground
3	OUT	Balanced pin
4	OUT	Balanced pin
5	GND	Ground

Evaluation Circuit

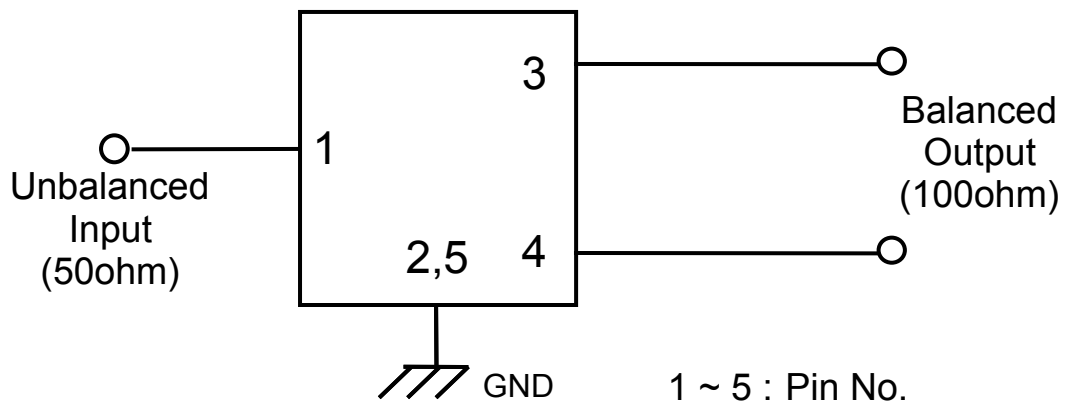



MSL1

* Pb Free Part

Customer Name	Standard specification	TAIYO YUDEN Mobile Technology Co.,Ltd.	
System	3GPP2 BC0+BC10 Rx (50/100ohm)	DATE	June 30, 2010
Part Number	F5KY878M0B4ND	Version 1.0 a	

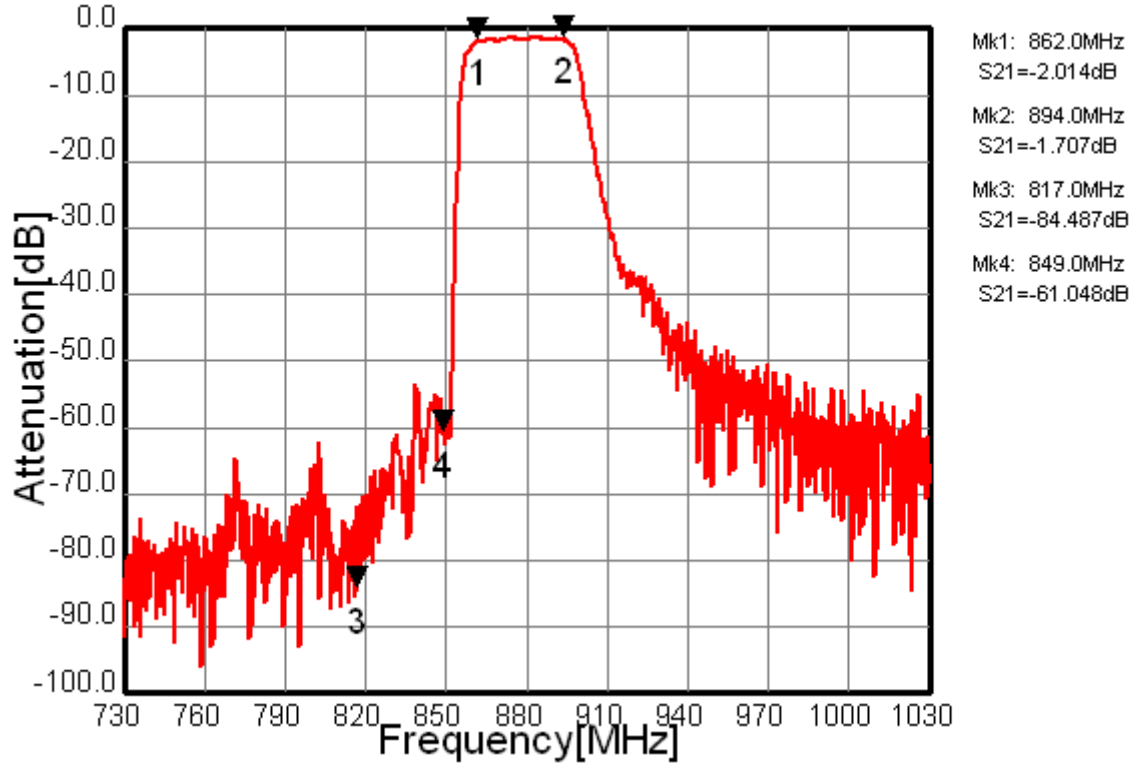


Fig.1 Pass-band Characteristics

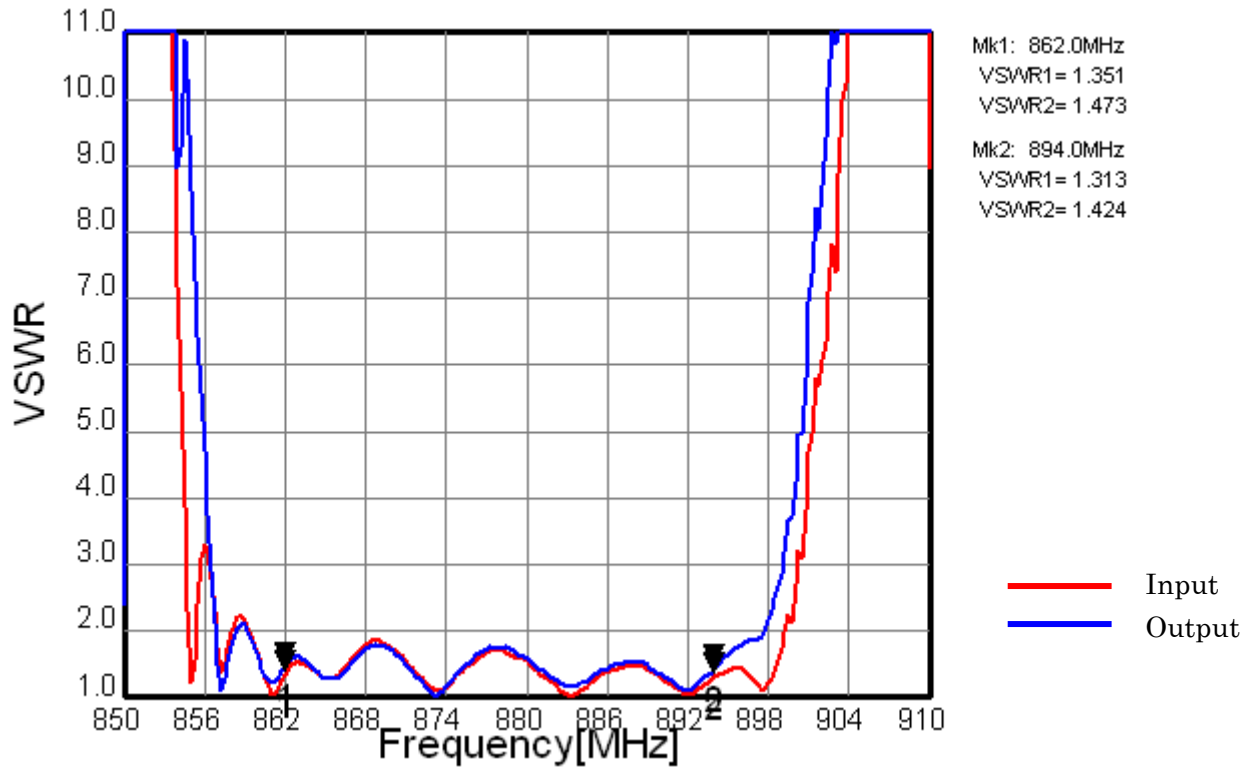


Fig.2 VSWR



MSL1

* Pb Free Part

Customer Name	Standard specification	TAIYO YUDEN Mobile Technology Co.,Ltd.	
System	3GPP2 BC0+BC10 Rx (50/100ohm)	DATE	June 30, 2010
Part Number	F5KY878M0B4ND	Version 1.0 a	

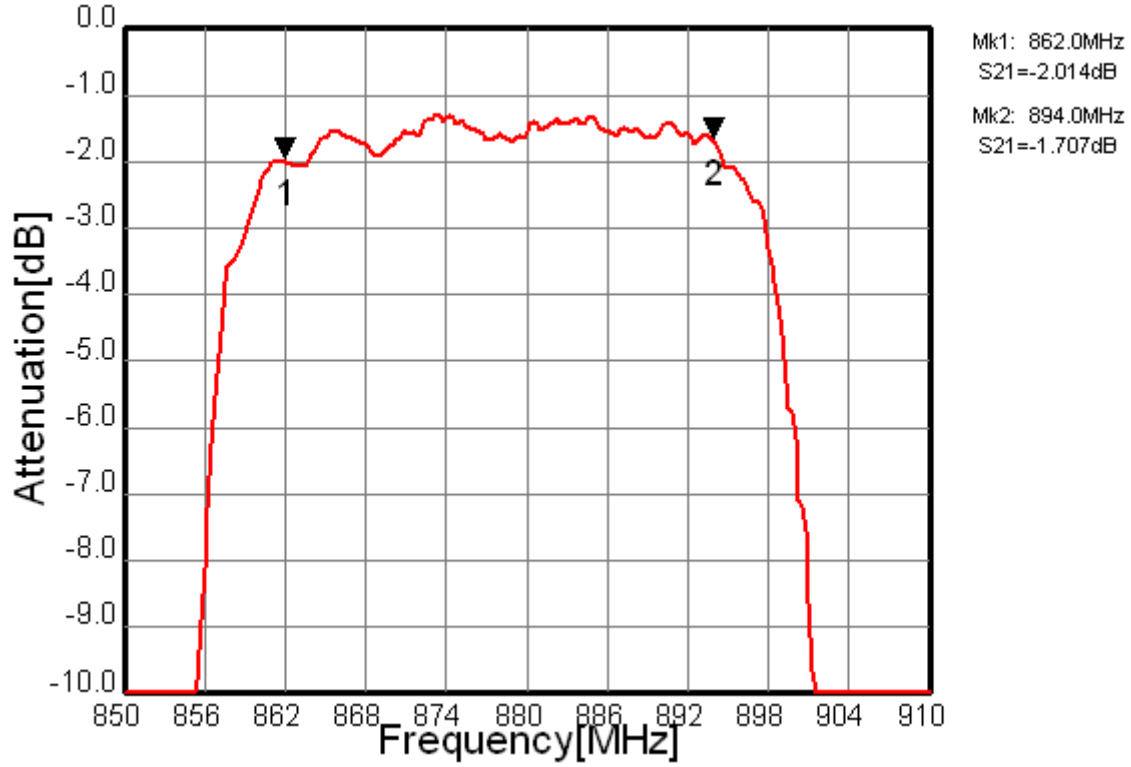


Fig.3 In-band Characteristics (Simulation)

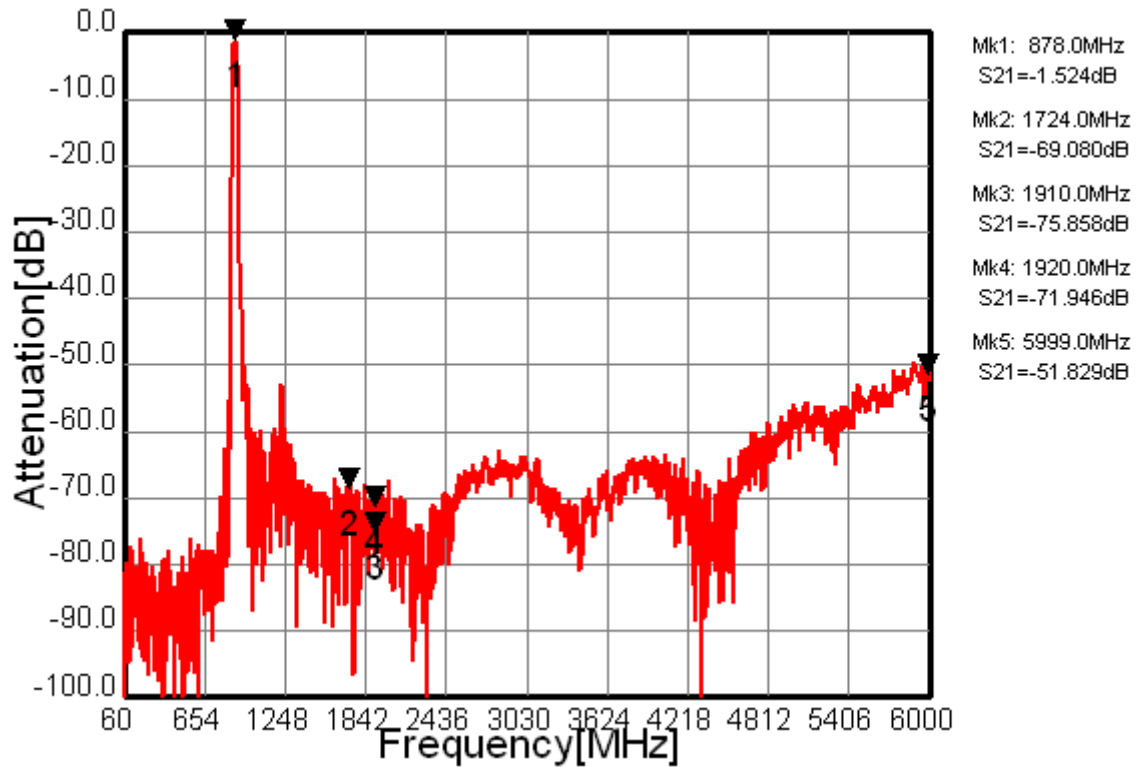


Fig.4 Wide-band Characteristic



MSL1

* Pb Free Part

Customer Name	Standard specification	TAIYO YUDEN Mobile Technology Co.,Ltd.	
System	3GPP2 BC0+BC10 Rx (50/100ohm)	DATE	June 30, 2010
Part Number	F5KY878M0B4ND	Version 1.0 a	

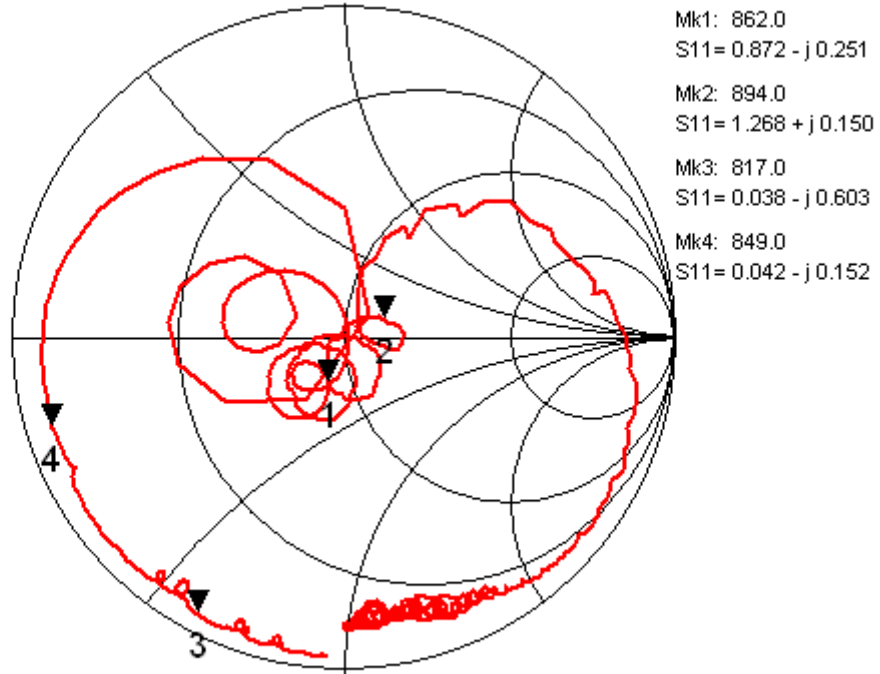


Fig.5 Impedance (Input)

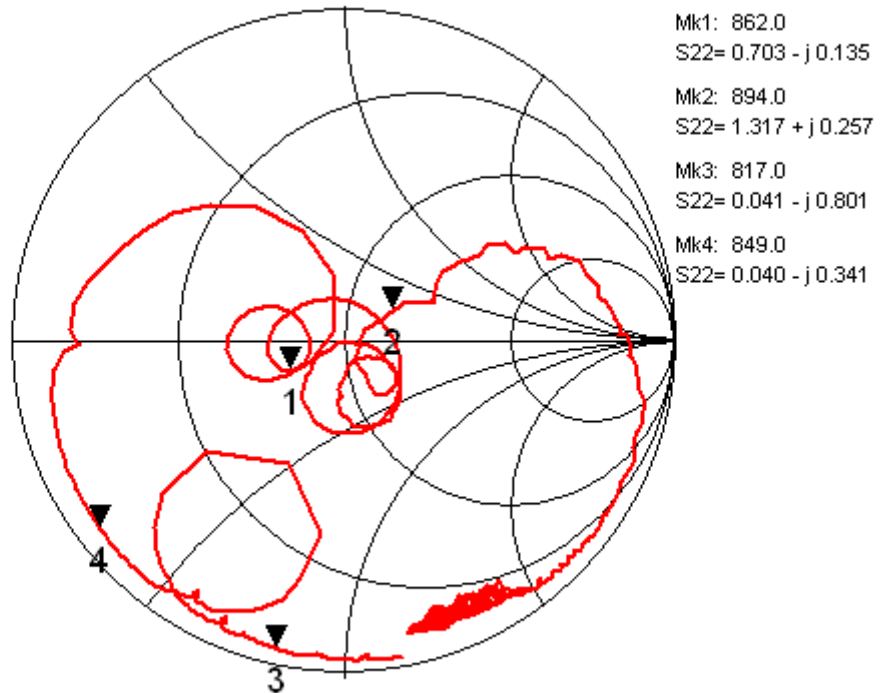


Fig.6 Impedance (Output)



MSL1

* Pb Free Part

Customer Name	Standard specification	TAIYO YUDEN Mobile Technology Co.,Ltd.	
System	3GPP2 BC0+BC10 Rx (50/100ohm)	DATE	June 30, 2010
Part Number	F5KY878M0B4ND	Version 1.0 a	

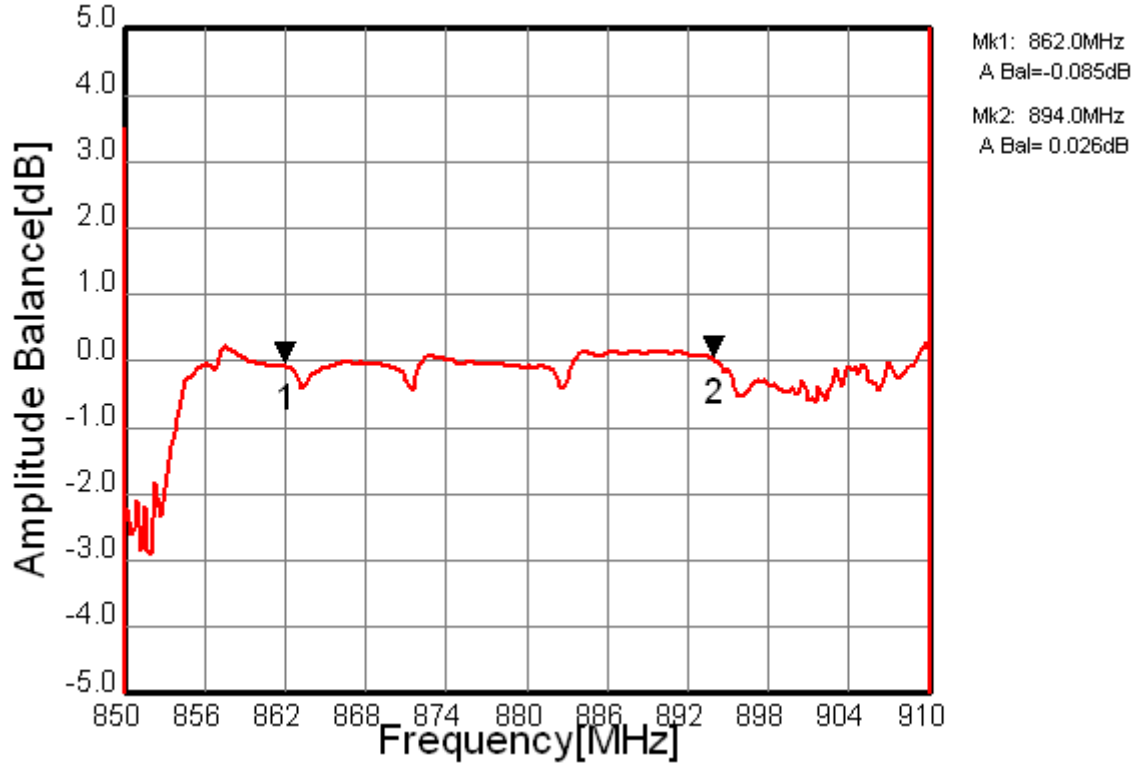


Fig.7 Amplitude balance

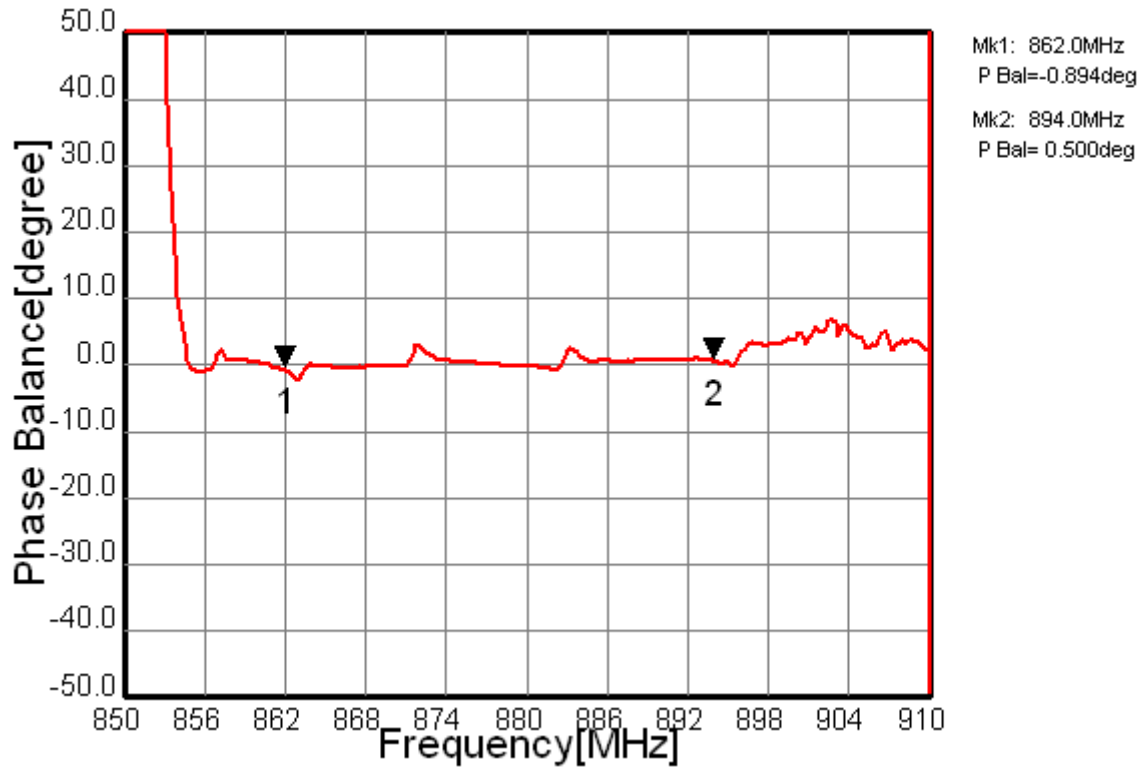


Fig.8 Phase balance



MSL1

* Pb Free Part

Customer Name	Standard specification	TAIYO YUDEN Mobile Technology Co.,Ltd.	
System	3GPP2 BC0+BC10 Rx (50/100ohm)	DATE	June 30, 2010
Part Number	F5KY878M0B4ND	Version 1.0 a	

Ordering Code

Ordering Code	Packing	Reel size	Status
F5KY878M0B4ND-Z S	Tape & Reel	3,000pcs.	MP
F5KY878M0B4ND-ZAS	Tape & Reel	less than 3,000 pcs.	MP
F5KY878M0B4ND-Y S	Tape & Reel	15,000pcs	MP
F5KY878M0B4ND-YAS	Tape & Reel	less than 15,000 pcs.	MP
F5KY878M0B4ND-Q S	Bulk	few pcs.	MP

*Minimum order quantity (MOQ) is assigned for each inquiry, Please contact to Sales Representatives.

*Status : MP (Mass Production)

Notice

All of the contents specified herein are subject to change without notice due to technical improvements, etc.

Please contact Taiyo Yuden Co., Ltd. for further details of product specifications.

Please conduct validation and verification of products in actual condition of mounting and operating environment before commercial shipment of the equipment.