



# DSR0.7A~DSR0.7M

## Surface Mount Standard Rectifiers

### Features

- Low profile space
- Ideal for automated placement
- Glass passivated chip junctions
- Low forward voltage drop
- Low leakage current
- High forward surge capability
- High temperature soldering:  
260°C/10 seconds at terminals
- Component in accordance to  
RoHS 2002/95/1 and WEEE 2002/96/EC



### Mechanical Date

- **Case:** JEDEC SOD-123FL molded plastic body over glass passivated chip
- **Terminals:** Solder plated, solderable per J-STD-002B and JESD22-B102D
- **Polarity:** Laser band denotes cathode end
- **Weight:** 0.017gram

### Major Ratings and Characteristics

$I_{F(AV)}$	0.7A
$V_{RRM}$	50 V to 1000 V
$I_{FSM}$	25 A
$I_R$	5 $\mu$ A
$V_F$	1.1 V
$T_j \text{ max.}$	150 °C

### Maximum Ratings & Thermal Characteristics

( $T_A = 25^\circ\text{C}$  unless otherwise noted)

Items	Symbol	DSR 0.7A	DSR 0.7B	DSR 0.7D	DSR 0.7G	DSR 0.7J	DSR 0.7K	DSR 0.7M	UNIT
Maximum repetitive peak reverse voltage	$V_{RRM}$	50	100	200	400	600	800	1000	V
Maximum RMS voltage	$V_{RMS}$	35	70	140	280	420	560	700	V
Maximum DC blocking voltage	$V_{DC}$	50	100	200	400	600	800	1000	V
Maximum average forward rectified current	$I_{F(AV)}$	0.7							A
Peak forward surge current 8.3 ms single half sine-wave superimposed on rated load	$I_{FSM}$	25							A
Thermal resistance from junction to ambient <sup>(1)</sup>	$R_{\theta JA}$	150							°C/ W
Operating junction and storage temperature range	$T_J, T_{STG}$	-55 to +150							°C

Note 1: Mounted on P.C.B. with 0.23 x 0.38" (0.9 x 1.5mm) copper pad areas.

### Electrical Characteristics ( $T_A = 25^\circ\text{C}$ unless otherwise noted)

Items	Test conditions	Symbol	Min	Type	Max	UNIT
Instantaneous forward voltage	$I_F=0.7A^{(2)}$	$V_F$	-	0.96	1.10	V
Reverse current	$V_R=V_{DC}$	$I_R$	-	-	5	$\mu$ A
					50	

Note 2: Pulse test:300 $\mu$ s pulse width,1% duty cycle.




# DSR0.7A~DSR0.7M


## Surface Mount Standard Rectifiers

**Characteristic Curves** ( $T_A=25^\circ\text{C}$  unless otherwise noted)


**Fig.1 Forward Current Derating Curve**

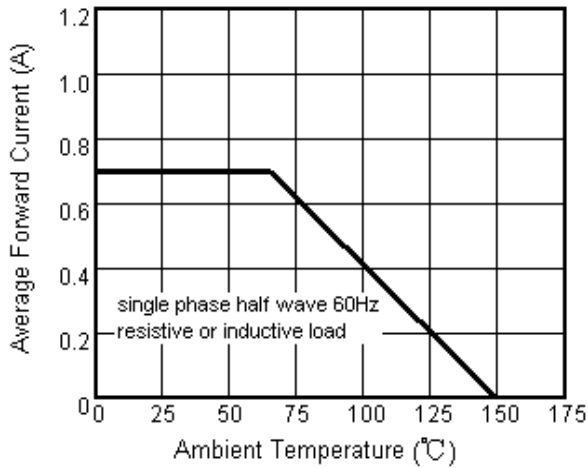


**Fig.2 Maximum Non-Repetitive Peak Forward Surge Current**

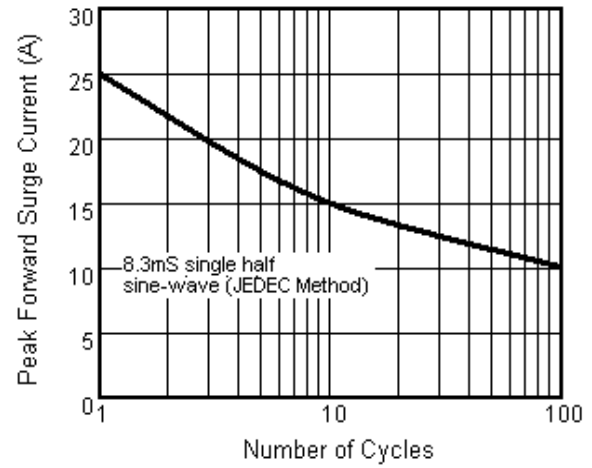

**Fig.3 Typical Instantaneous Forward Characteristics**

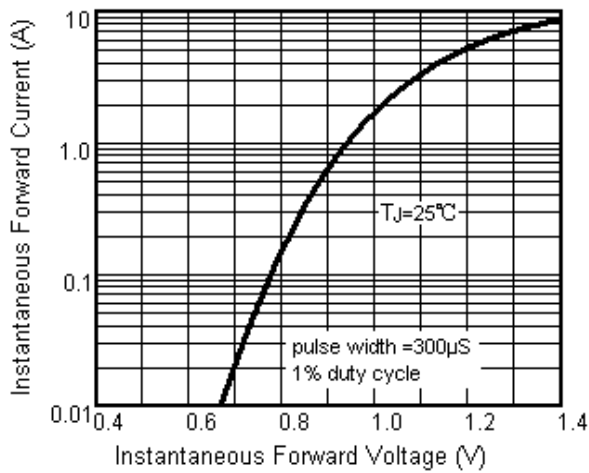

**Fig.4 Typical Reverse Characteristics**

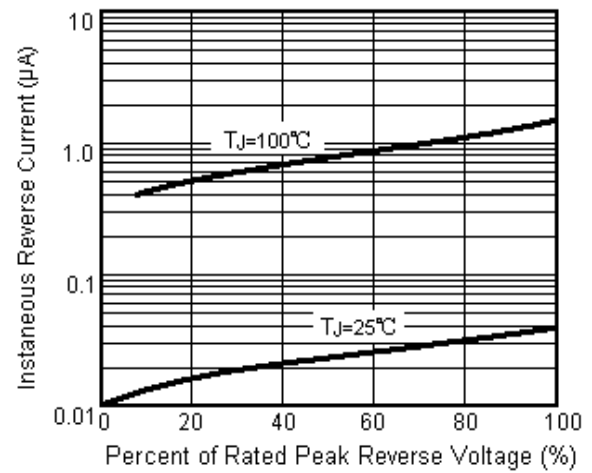




# DSR0.7A~DSR0.7M

## Surface Mount Standard Rectifiers

### Package Outline

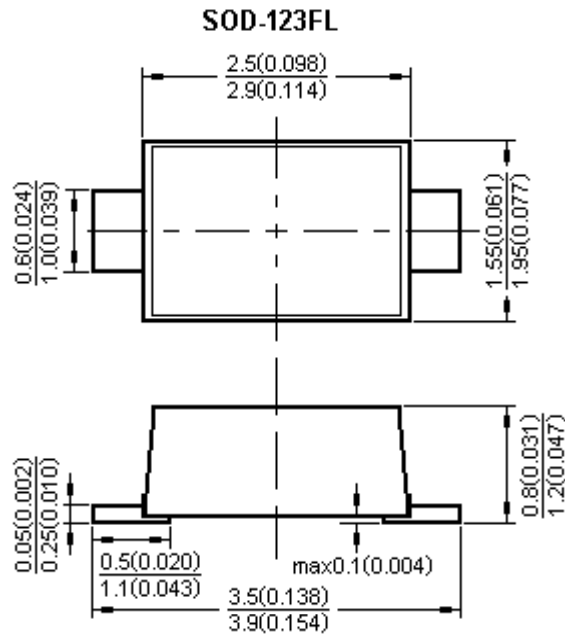

Dimensions in millimeters and (inches)

### Notice

- Product is intended for use in general electronics applications.
- Product should be worked less than the ratings; if exceeded, may cause permanent damage or introduce latent failure mechanisms.
- The absolute maximum ratings are rated values and must not be exceeded during operation. The following are the general derating methods you design a circuit with a device.  
 $I_{F(AV)}$  : We recommend that the worst case current be no greater than 80% .  
 $I_{FSM}$  : This rating specifies the non-repetitive peak current. This is only applied for an abnormal operation, which the general during the lifespan of the device.  
 $T_J$  : Derate this rating when using a device in order to ensure high reliability. We recommend that the device be used at a  $T_J$  of below 125°C.

- TRR is registered trademark of Rising-sun Technology. Rising-sun Technology reserves the right to make changes to any product in this specification to improve reliability, functional characteristics, or design without notice.
- Rising-sun Technology does not assure any liability arising out of the applications or any product described in this specification.
- Rising-sun Technology advises customers to obtain the latest version of the device information before placing orders to verify that the required information is current.