


| Symbol | Item | Dim | Tolerance |
|--------|-------------------------|--------|------------------|
| A | Component Height | .430" | ± .020" |
| do | Lead Diameter | .025" | ± .0015" |
| F | Lead Span | .200" | + .024" / -.008" |
| Ho | Height to Seating Plane | .630" | ± .020" |
| H1 | Overall Height | 1.200" | ± .015" |
| Po | Sprocket Hole Pitch | .500" | ± .012" |
| P | Component Pitch | .500" | ± .010" |

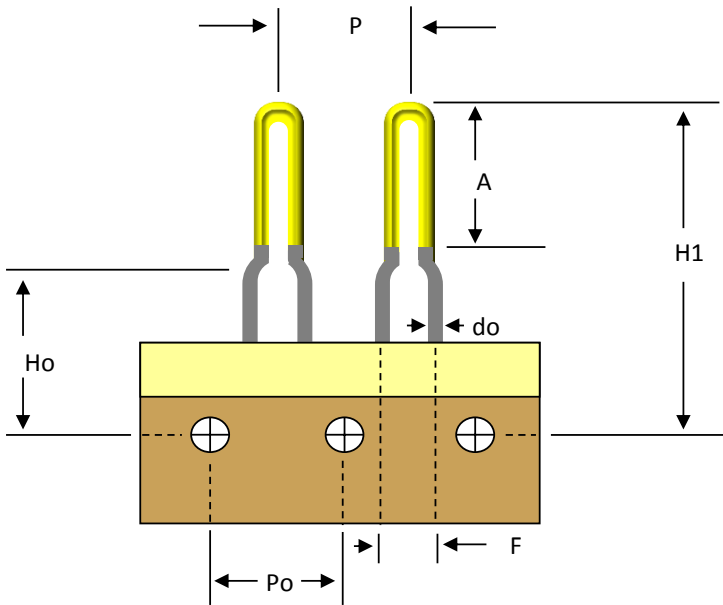

Title: Fully Insulated Radial, .570" High, Yellow

Vestal PN: IR200-22-FI-570Y

Drawing #: VED098

Rev: B

DWG: 1 of 1

Rev Date: 05.13.14

Conductor: 22 AWG Solid Copper

Plating: Tin

Wire: UL1429Y Wire Spec: ASTM-B33

Taping Spec: EIA-468

Vestal Electronic Devices, LLC

635 Dickson Street

Endicott, NY 13760

www.vestalelectronics.com