

#### Feature:

- Black lens
- Packed in bulk pack (Available in tape/reel)
- High photo sensitivity
- Silicon chip
- Photo transistor
- Daylight filter

## **Description:**

This 3mm photo transistor is ideal for applications that require high sensitivity. This package also comes with daylight filter.

## **Application:**


- Photo copy machines
- Camera
- Printer

## **Certification & Compliance:**

- TS16949
- ISO9001
- RoHS Compliant



#### **Dimension:**

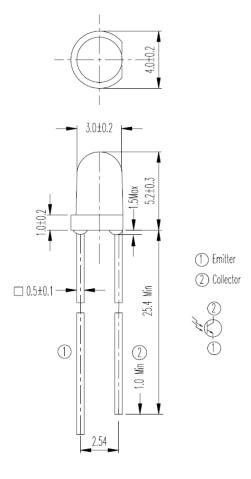

Units: mm / tolerance =  $\pm -0.25$ mm

Product: QSC5T120B	Date: 06/25/2011	Page 1 of 5
	Version# 1.0	



Electrical / Optical Characteristic (T=25 °C)

Parameter	Symbol	Condition	Min	Тур	Max	Unit
Spectra Bandwidth	λ <sub>0.5</sub>	-	760	-	1200	nm
Peak Sensitivity wavelength	λ <sub>P</sub>	-	-	940	1	nm
Collector-Emitter Breakdown Voltage	BV <sub>CEO</sub>	$I_E = 100 \mu A$ , $Ee = 0mW/cm^2$ ,	30	-	-	V
Emitter-Collector Breakdown Voltage	BV <sub>ECO</sub>	$I_E = 100 \mu A,$ $Ee = 0mW/cm^2$	5	-	-	V
On state collector current	I <sub>C(ON)</sub>	$Ee = 1mW/cm^2,$ $V_{CE} = 5V$	0.7	2.0	-	mA
Collector dark current	I <sub>CEO</sub>	$Ee = 0mW/cm^2,$ $V_{CE} = 00V$	-	-	100	nA
Collector-Emitter saturation voltage	V <sub>CE(sat)</sub>	$Ee = 1mW/cm^2,$ $I_C = 2 mA$	-		0.4	V
Rise time	t <sub>r</sub>	$V_{CE} = 5V$		45		0
Fall time	t <sub>f</sub>	$R_L = 1000\Omega$ $I_C = 1 \text{mA}$	-	15	-	uS

**Absolute Maximum Rating:** 


Part #	Туре	P <sub>d</sub> (mW)*	V <sub>CEO</sub> (V)	V <sub>ECO</sub> (V)	I <sub>C</sub> (mA)	T <sub>OP</sub> (°C)	T <sub>ST</sub> (°C)	T <sub>solder</sub> (°C)**
QSC5T120B	Photo Transistor	75	30	5	20	-25 to + 85	-40 to +85	260

<sup>\*</sup> at or below 25 °C

Product: QSC5T120B	Date: 06/25/2011	Page 2 of 5
	Version# 1.0	

<sup>\*\*</sup> wave solder for no more than 5 sec @ 260 °C




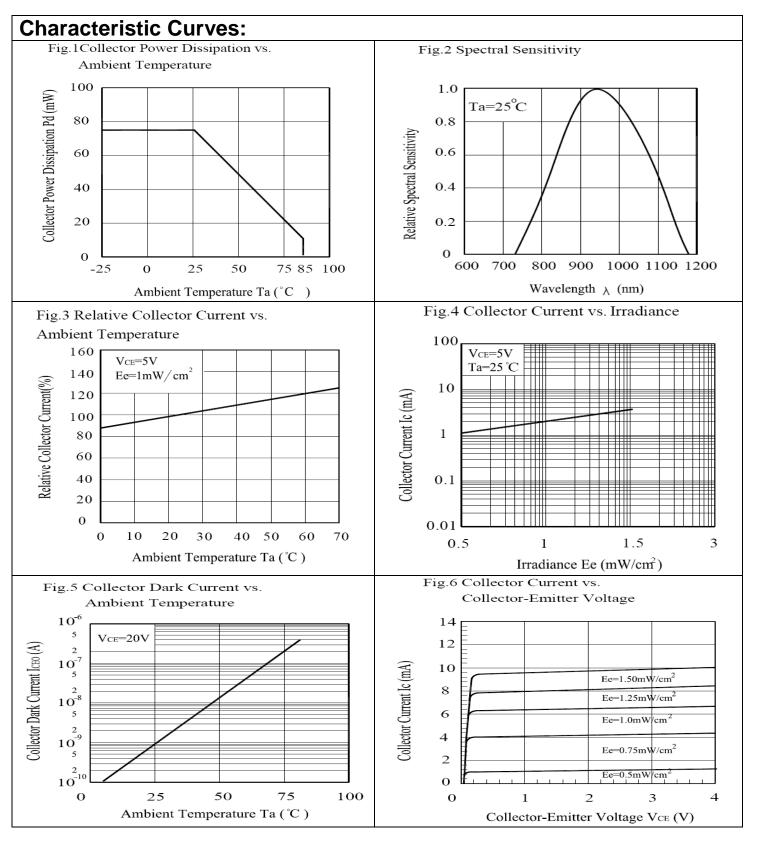

Product: QSC5T120B	Date: 06/25/2011	Page 3 of 5
	Version# 1.0	



# **Solder Profile:**

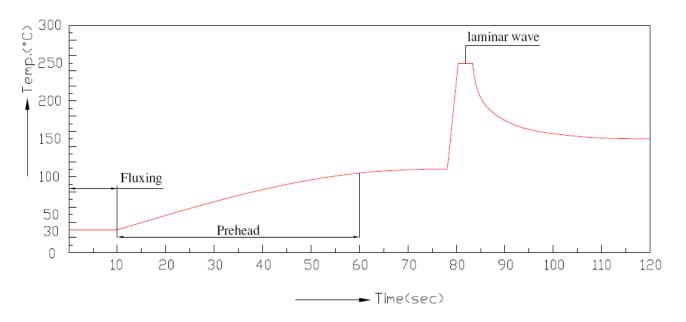

QSC5T120B

# **Wave Soldering Profile**

DIP Soldering		
Preheat temp.	100°C Max. (60 sec Max.)	
Bath temp. & time	260 Max., 5 sec Max	
Distance	3mm Min.	

Product: QSC5T120B	Date: 06/25/2011	Page 4 of 5
	Version# 1.0	



# **Revision History:**

Description:	Revision #	Revision Date
New Release of QSC5T120B	V1.0	06/25/2011

Product: QSC5T120B	Date: 06/25/2011	Page 5 of 5
	Version# 1.0	