

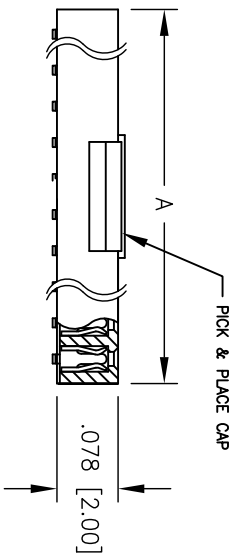


| Rev | AWO # | Description | Date | Appr |
|-----|-------|-------------|---------|------|
| - | | RELEASED | 1/26/11 | |

APPROVED: _____ TITLE: _____
 DATE: _____

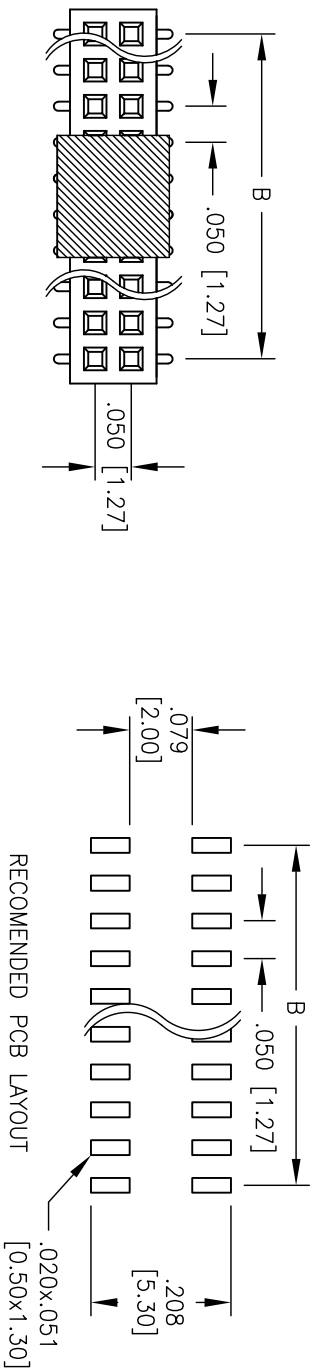

PACKAGED ON TAPE & REEL

A = .050 [1.27] X No. of Positions + .018 [0.46]
 B = .050 [1.27] X No. of Spaces

SPECIFICATIONS:

Material: Nylon 46, rated UL 94V-0
 Insulator color: Black
 Contacts: Phosphor Bronze
 Plating: Gold Flash over Nickel underplate on contact area, Tin over Copper underplate on SMT tails

Electrical:

Operating voltage: 250 VAC max
 Current rating: 1 Amp max
 Contact resistance: 20 mohms max
 Insulation resistance: 5000 Mohms min @ 500 VDC
 Dielectric withstanding voltage: 1000 VAC for 1 minute
 Temperature Rating: Operating temperature: -40°C to +105°C

Environmental:

Lead free, RoHS compliant.
 Recommended soldering temp: 260° for 5 sec.



| UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] | |
|--|-------------|
| TOLERANCES: EXCEPT AS NOTED | |
| INCHES | HOLES |
| .X ± .10 | ØX ± .10 |
| .XX ± .020 | ØXX ± .015 |
| .XXX ± .015 | ØXXX ± .010 |
| APPROVALS | |
| DRAWN | AY |
| CHECKED | VW |
| DATE | DATE |

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .050" RECEPTACLE STRIP, DUAL ROW, SMT
 .085" INSULATOR HEIGHT, SEL GOLD PLATED

| | |
|----------|--|
| APPROVED | |
|----------|--|

| SIZE | PART NO. | REV. |
|------|-------------------------|------|
| X | HRS-2C-XX-SG-SMT-PP-1/R | - |

REF: S00059T SCALE: NTS SHEET 1 OF 1