
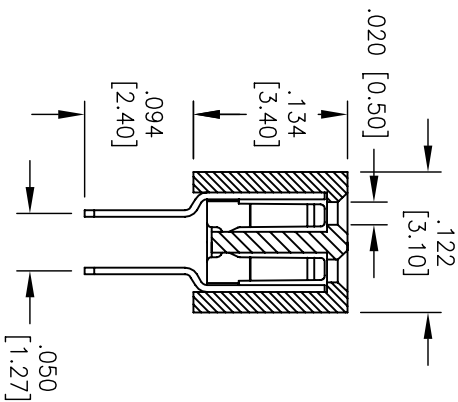
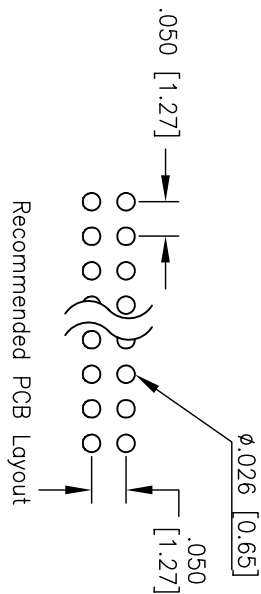
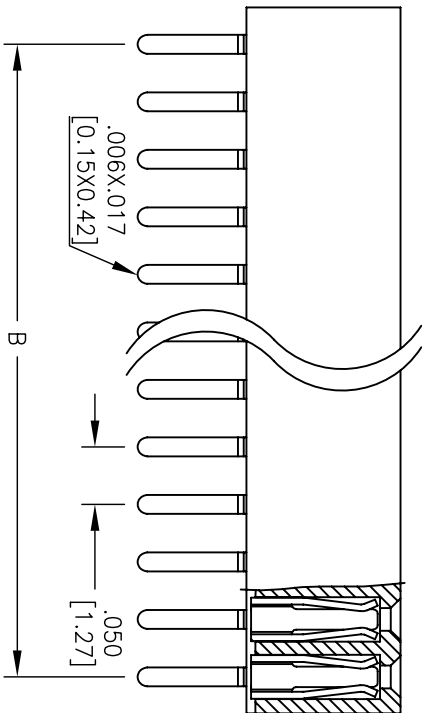


Rev	AWO #	Description	Date	Appr
-		RELEASED	7/17/08	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

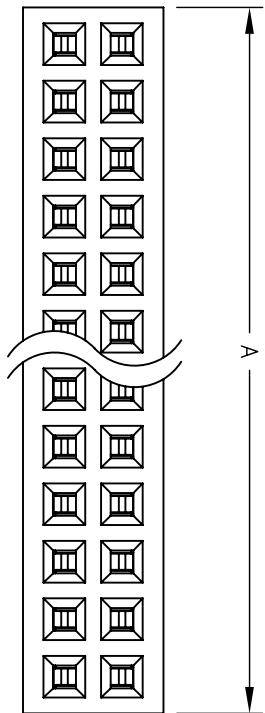

A = .050 [1.27] X No. of Positions + .014 [0.35]  
 B = .050 [1.27] X No. of Spaces

**SPECIFICATIONS:**

**Material:**

Insulator: PBT, rated UL 94V-0

Insulator color: Black

Contacts: Phosphor Bronze

**Plating:**

Gold Flash over nickel underplate on contact area,  
 Tin over Copper underplate on tails

**Electrical:**

Operating voltage: 250 VAC max

Current rating: 1 Amp max

Contact resistance: 20 mohms max

Insulation resistance: 5000 Mohms min @ 500 VDC

Dielectric withstanding voltage: 1000 VAC for 1 minute

**Temperature Rating:**

Operating temperature: -40°C to +105°C

**Environmental:**

Lead free, RoHS compliant.

Recommended soldering temp: 235°C for 5 sec.



UNLESS OTHERWISE SPECIFIED  
 ALL DIMENSIONS ARE INCHES [MM]  
 TOLERANCES: EXCEPT AS NOTED  
 INCHES HOLES  
 X ± .10 ØX ± .10  
 .XX ± .020 ØXX ± .015  
 .XXX ± .015 ØXXX ± .010  
 APPROVALS DATE

DRAWN DY 7/17/08

CHECKED

APPROVED

**ADAM TECH**

909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE  
 .050" RECEPTACLE STRIP, DUAL ROW,  
 .134" INSULATOR HEIGHT, SEL GOLD PLATED

SIZE	PART NO.	REV.
X	HRS-2E-XX-SG	-