

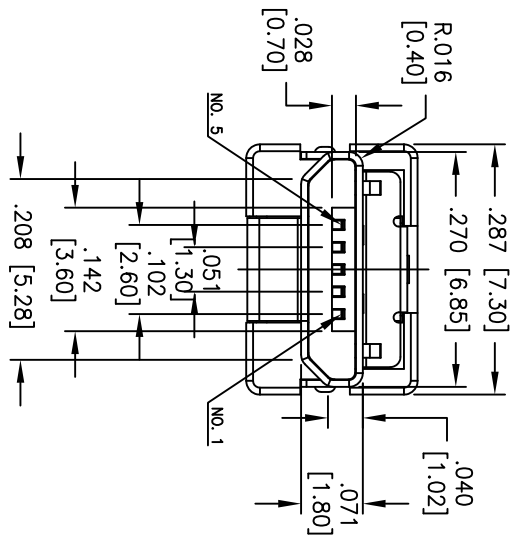
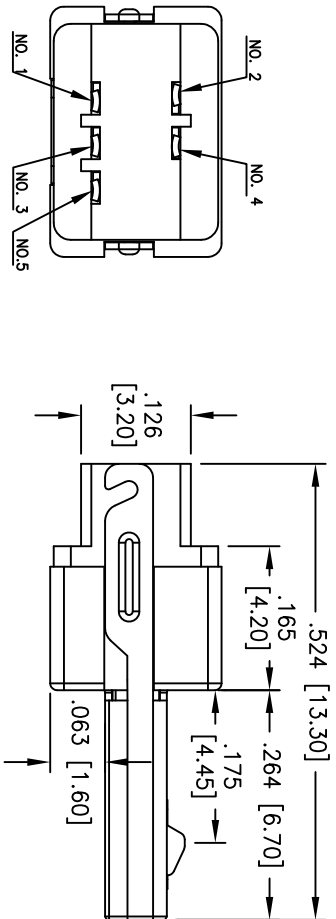


Rev	AWO #	Description	Date	Appr
-		RELEASED	6/08/09	

APPROVED: _____
 DATE: _____ TITLE: _____

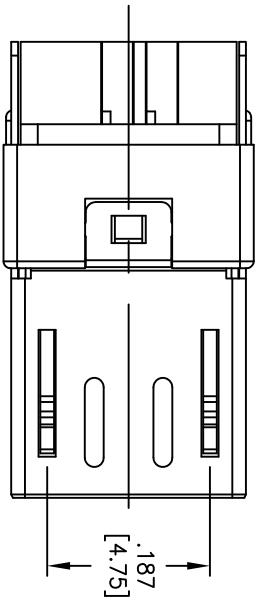

SPECIFICATIONS:

Material: Insulator: LCP, glass reinforced, rated UL 94V-0
 Insulator color: Black
 Contacts: PBS
 Shell: Stainless, Nickel plated
 Plating: 30u" Gold over Nickel underplate overall

Electrical:
 Current rating: 1 Amp max.
 Contact resistance: 30 mohms max.
 Insulation resistance: 100 Mohms min. @ 500 VDC
 Dielectric withstanding voltage: 100 VAC for 1 minute
 Temperature Rating:
 Operating temperature: -30°C to +80°C

Environmental:
 Lead free, RoHS compliant.
 Recommended soldering temp: 260°C for 5 sec.



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	HOLES
.XX ± .10	ØXX ± .015
.XX ± .020	ØXX ± .015
.XXX ± .015	ØXXX ± .010
APPROVALS	DATE
DRAWN	DY
CHECKED	
APPROVED	
	6/08/09

ADAM TECH
 909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: MICRO USB B TYPE PLUG

SIZE	PART NO.	SCALE	SHEET	REV.
X	MCR-B-MPLUG-01	NTS	1 OF 1	-
REF:	S00095T			