


Rev	AWO #	Description	Date	Appr
-		RELEASED	3/07/11	

APPROVED: _____
 DATE: _____ TITLE: _____



Specifications:
 Material: Insulator: LCP, glass reinforced, rated UL 94V-0
 Insulator color: Black
 Contacts: Copper Alloy
 Shell: Stainless, Nickel plated
 Latch: Stainless
 Top cover: SPCC, Nickel plated
 Lower cover: SPCC, Nickel plated
 Plating: Gold flash over Nickel underplate on contact area, Tin over Copper underplate on tails.
 Electrical: Contact resistance: 30 mohms max.
 Insulation resistance: 1000 Mohms min.
 Dielectric withstanding voltage: 100 VAC for 1 minute
 Environmental: Lead free, RoHS compliant.
 Recommended soldering temp: 260°C for 5 sec.

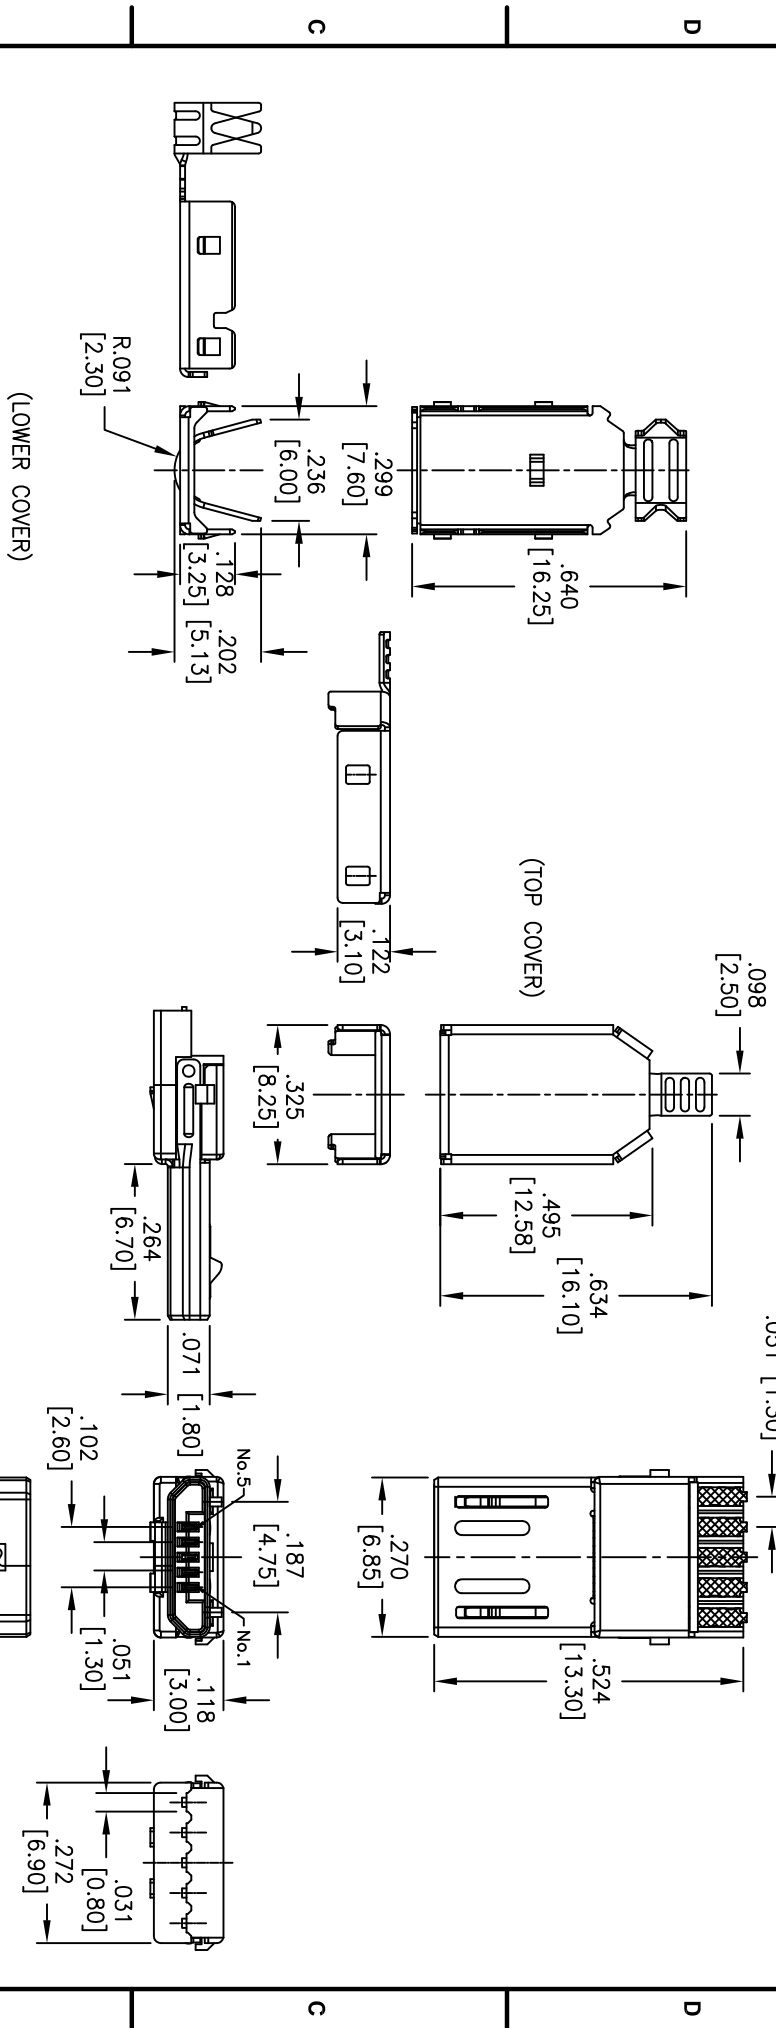

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLES
X ± .10	ØX ± .10
.XX ± .020	ØXX ± .015
.XXX ± .015	ØXXX ± .010
APPROVALS	DATE
DRAWN DY	3/07/11
CHECKED	
APPROVED	

ADAM TECH
 909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: MICRO B PLUG / SLIM+TOP COVER +LOWER COVER		SIZE: X	PART NO.: MCR-B-S-PLUG-01	REV: -
REF: S0015C	SCALE: NTS	SHEET 1 OF 1		