

DIGITRON SEMICONDUCTORS

1N3064, 1N4305, 1N4454 SWITCHING RECTIFIERS

MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Maximum working inverse voltage	WIV	50	V
Average rectified current	I_O	100	mA
Forward current steady state	I_F	300	mA
Recurrent peak forward current	i_f	400	mA
Peak forward surge current Pulse width = 1.0s Pulse width = 1.0 μ s	$\dot{i}_{f(surge)}$	1.0 4.0	A
Power dissipation Maximum total dissipation Linear derating factor (from 25°C)	P_D	500 3.33	mW mW/°C
Storage temperature range	T_{stg}	-65 to +200	°C
Maximum junction temperature	T_J	+175	°C
Lead temperature	T_L	+260	°C

ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ unless otherwise noted)

Characteristic	Symbol	Min	Max	Unit	Test Condition
Forward voltage 1N3064 1N4454 1N4305	V_F	0.610 0.550 0.505 - -	0.710 0.650 0.575 1.000 1.000	V	$I_F = 2.0\text{mA}$ $I_F = 1.0\text{mA}$ $I_F = 250\mu\text{A}$ $I_F = 10\text{mA}$ $I_F = 10\text{mA}$ $I_F = 10\text{mA}$
Reverse current	I_R	-	0.1 100	μA	$V_R = 50\text{V}$ $V_R = 50\text{V}, T_A = 150^\circ\text{C}$
Breakdown voltage	BV	75	-	V	$I_R = 5.0\mu\text{A}$
Reverse recovery time ⁽¹⁾ 1N4305 1N3064 1N4305 1N4454	t_{rr}	- - - -	2.0 4.0 4.0 4.0	ns	$I_F = 10\text{mA}, V_R = 6.0\text{V}, R_L = 100\Omega$ $I_F = I_R = 10\text{mA}, V_R = 1.0\text{V}, R_L = 100\Omega$ $I_F = I_R = 10\text{mA}, V_R = 1.0\text{V}, R_L = 100\Omega$ $I_F = I_R = 10\text{mA}, V_R = 1.0\text{V}, R_L = 100\Omega$
Capacitance	C	-	2.0	pF	$V_R = 0, f = 1.0\text{MHz}$
Rectification efficiency ⁽²⁾	RE	45	-	%	$f = 1.0\text{MHz}$
Typical forward voltage temperature coefficient	$\Delta V_F / ^\circ\text{C}$	3.0		mV/°C	

Note 1: Recovery to 1.0mA

Note 2: Rectification efficiency is defined as the ratio of dc load voltage to peak rf input voltage to the detector circuit, measured with 2.0V rms input to the circuit. Load resistance 5.0 Ω , load capacitance 20pF.


DIGITRON SEMICONDUCTORS

1N3064, 1N4305, 1N4454

SWITCHING RECTIFIERS

MECHANICAL CHARACTERISTICS

Case	DO-35
Marking	Body painted, alpha-numeric
Polarity	Cathode band

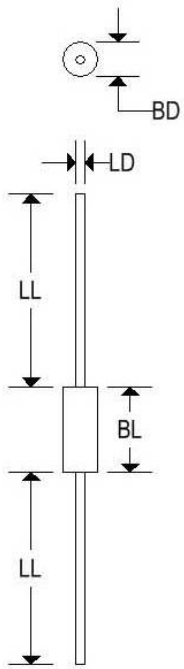

	DO-35			
	Inches		Millimeters	
	Min	Max	Min	Max
BD	0.055	0.090	1.400	2.290
BL	0.120	0.200	3.050	5.080
LD	0.018	0.022	0.460	0.560
LL	1.000	1.500	25.400	38.100

Available Non-RoHS (standard) or RoHS compliant (add PBF suffix).

Available as "HR" (high reliability) screened per MIL-PRF-19500, JANTX level. Add "HR" suffix to base part number.