

2-WAY POWER DIVIDER

CONNECTORIZED MODEL: DSK-709S

WIDE BANDWIDTH


5 - 1500 MHz

FEATURES:

- ▶ Excellent Performance
- ▶ Low Power

APPLICATIONS:


- ▶ Signal Splitting & Low Power Combining

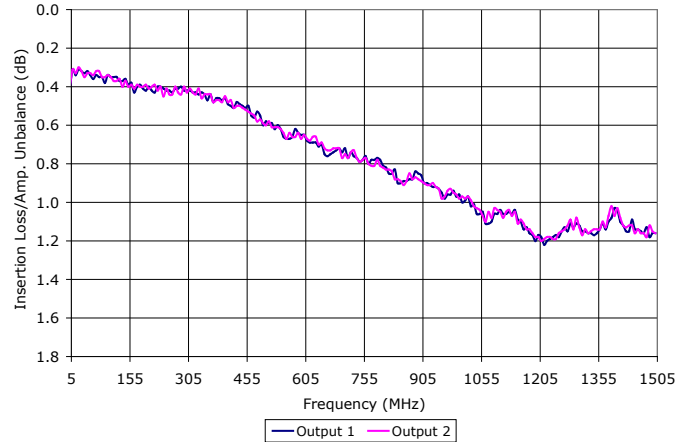

SPECIFICATIONS (Rev. A 01/10/11)

Frequency	5 - 1500 MHz		
Insertion Loss (dB)¹	Freq. (MHz)	Typ.	Max.
	5 - 50	0.2	0.5
	50 - 750	0.8	1.1
	750 - 1500	1.2	1.5
Isolation (dB)	Freq. (MHz)	Typ.	Min.
	5 - 50	27	23
	50 - 750	27	23
	750 - 1500	27	23
Phase Unbalance (Deg.)	Freq. (MHz)	Typ.	Max.
	5 - 50	0.3	2.0
	50 - 750	0.8	2.0
	750 - 1500	1.0	3.0
Amplitude Unbalance (dB)	Freq. (MHz)	Typ.	Max.
	5 - 50	0.03	0.20
	50 - 750	0.03	0.25
	750 - 1500	0.03	0.30
VSWR	1.4:1 (Typ.)		
Input Power ²	1 Watt (Max.)		
Operating Temperature Range	-40 to +85 °C		

¹ Insertion loss is above the theoretical 3.0 dB splitting loss.
² Handling power applies to splitter mode and assumes ideal 50 Ohms impedance matching on all ports.

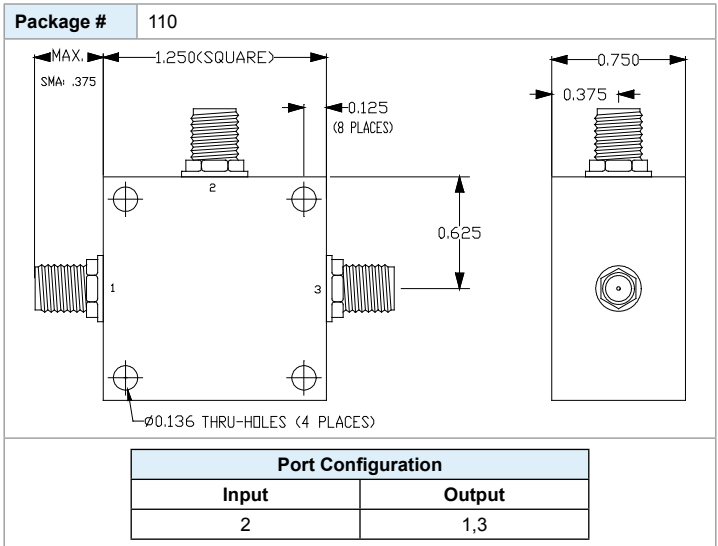



2-WAY POWER DIVIDER

CONNECTORIZED MODEL: DSK-709S

WIDE BANDWIDTH

5 - 1500 MHz

PERFORMANCE PLOTS

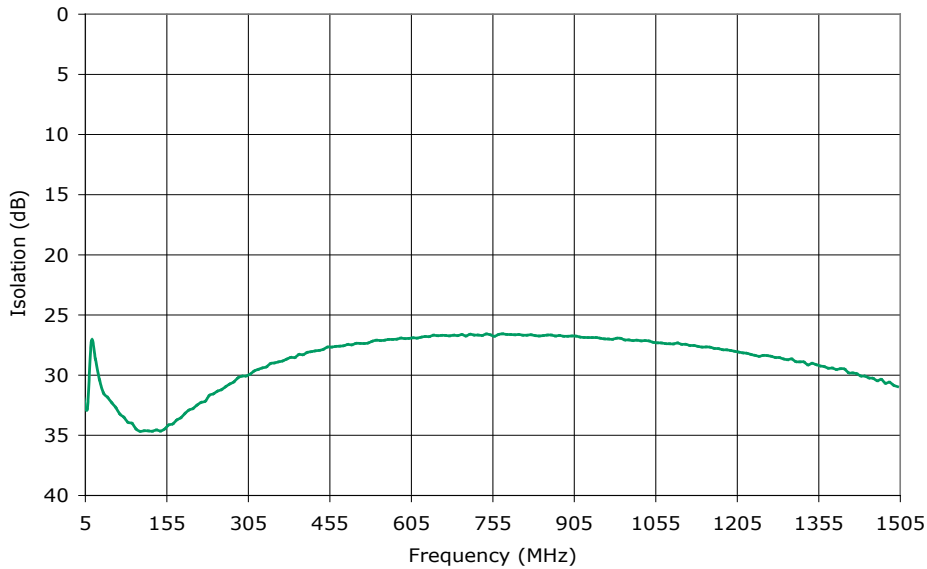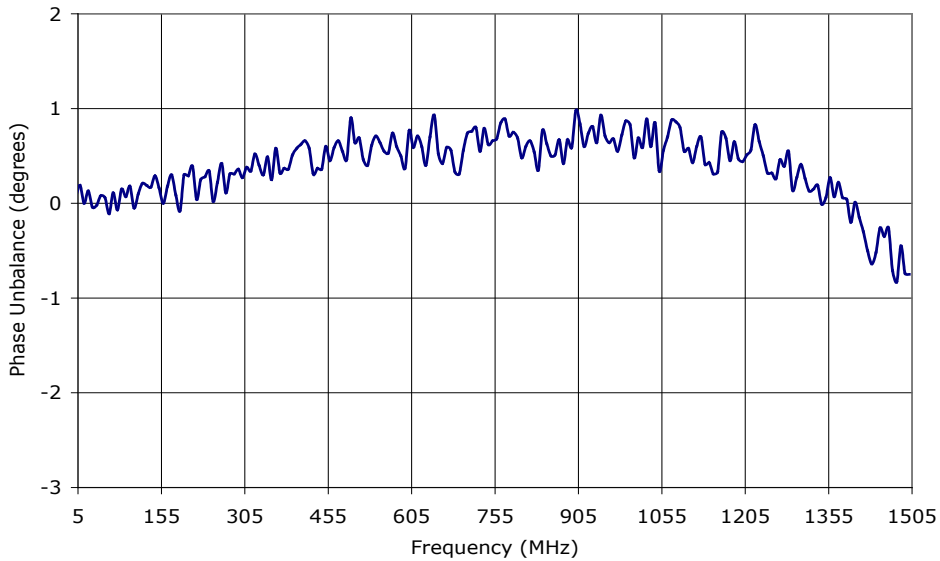

2-WAY POWER DIVIDER

CONNECTORIZED MODEL: DSK-709S

WIDE BANDWIDTH

5 - 1500 MHz

PERFORMANCE PLOTS

