

Model No.	LSBHXS
REV.	C2

PRODUCT SPECIFICATION FOR **LED Ribbon Light**

Descriptions:

- Linear separable LED strip on flexible printed circuit board with self-adhesive back
- Long life, easy installation
- Voltages available 12VDC
- LED type SMD 5050

Features:

- Available in red, orange, yellow, green, blue, white, etc
- Directly use on line voltage
- Low power consumption, high intensity
- Energy saving
- Excellent beam control
- Long life

Application:

- Inside of Auto lighting
- Channel letter signs
- Indirect accent décor light
- Large area back lighting
- Under counter light
- Decorate building's contour
- Substitute neon light

Product Picture:





Model No.	LSBHXS
REV.	C2

Device Selection Guide

Module No.	Color	Dom. Wavelength (Typ.)	Intensity / Per LED (Typ.)
LSBHRS	Red	625±5nm	1120 mcd
LSBHOS	Orange	605±5nm	1120 mcd
LSBHYS	Yellow	590±5nm	1120 mcd
LSBHGS	Green	525±5nm	3000 mcd
LSBHBS	Blue	470±5nm	1560mcd
LSBHWS	White	X=0.27;Y=0.28	7000mcd
LSBHMS	Warm White	X=0.45;Y=0.41	5000mcd
LSBHKS	Pink	X=0.45;Y=0.17	1900mcd
LSBHTS	Red	625±5nm	750mcd
	Green	525±5nm	1120mcd
	Blue	470±5nm	400mcd

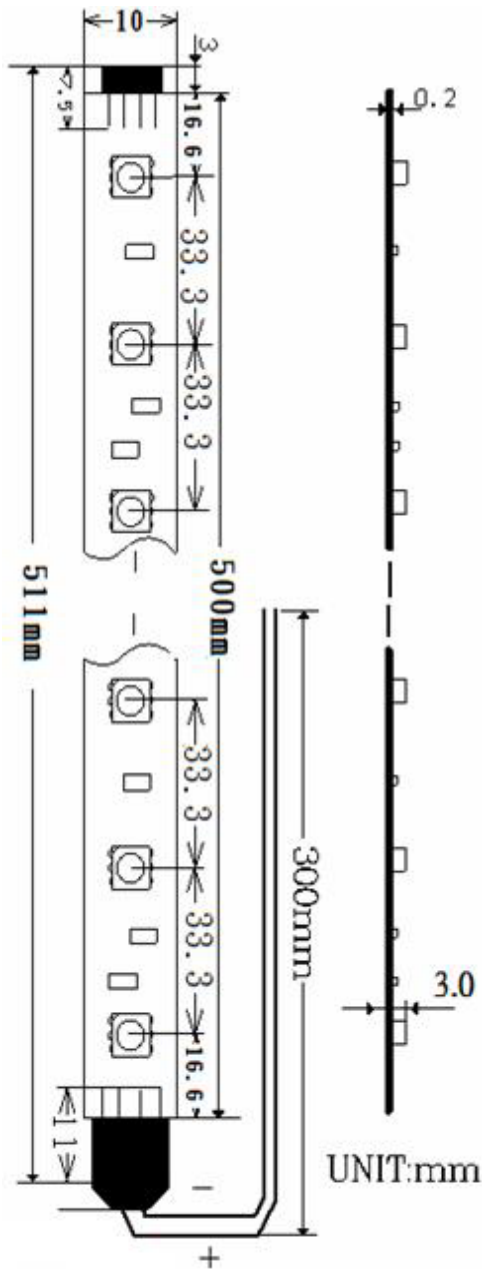
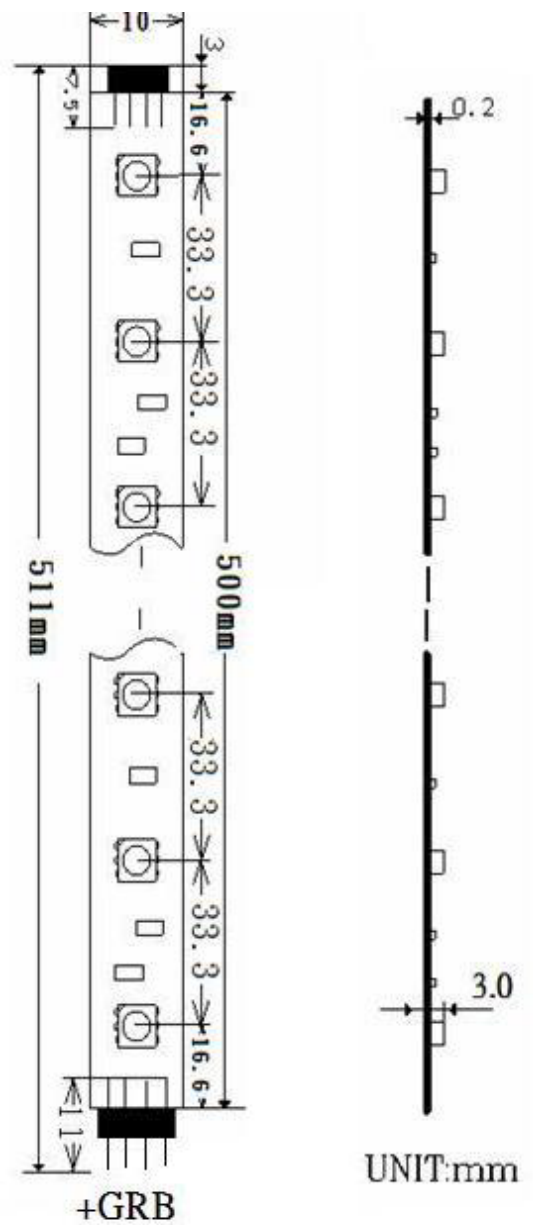
Absolute Maximum Ratings(Ta=25)

Items	Symbol	Values	Units
Operating Supply Range(DC)	V _{dc}	14	V
Input Current (DC)	I _i	0.45	A
Power Dissipation	P _a	6.3	W
LED Light Source Temperature	T _{led}	105	DegC
Operating Temperature	T _{ope}	-10 ~ +40	DegC
Storage Temperature	T _{sto}	-20 ~ +80	DegC

Typical Performance (Ta=25)

Items	Symbol	Min.	Typ.	Max.	Units
LED Module Power	P _m	-	3.6	6.3	w
Input Voltage(DC)	V _i	-	12	14	V
Product Input Current	I _f	-	0.3	0.45	A
Beam Pattern	BP	-	120	-	Deg
LED Quantity	QTY	-	15	-	PCS
Total Length of Modules (Including Pin)	L _{mod.}	-	511	-	mm
Net Weight	Wei.	---	35	---	g

Model No.	LSBHXS
REV.	C2

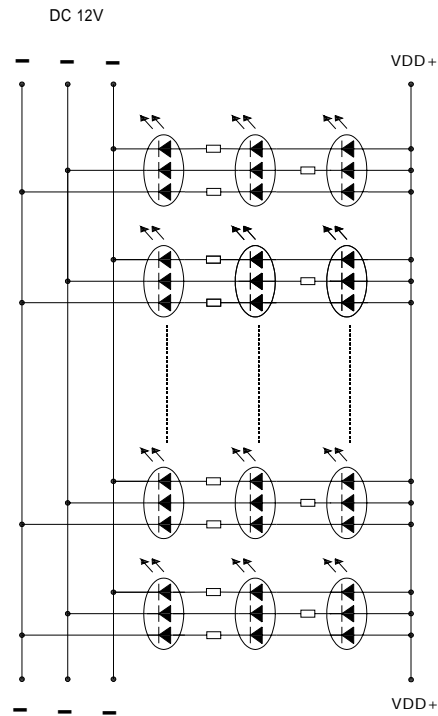
Product Dimensions:

Single color strip

RGB color strip
Tolerance: ±2mm
Remark:

- 1) For single color, use 2-wire (Red, black) external connection wire in which three internal “-“ shorted.
- 2) For RGB color, It not connection wire.



Model No.	LSBHXS
REV.	C2

Product Circuit



Packing information:

Box Dimensions

Unit: mm

Tolerance : ± 2 mm

