




Rev	AWO #	Description	Date	Appr
-		RELEASED	2/02/10	

APPROVED: _____

DATE: _____ TITLE: _____

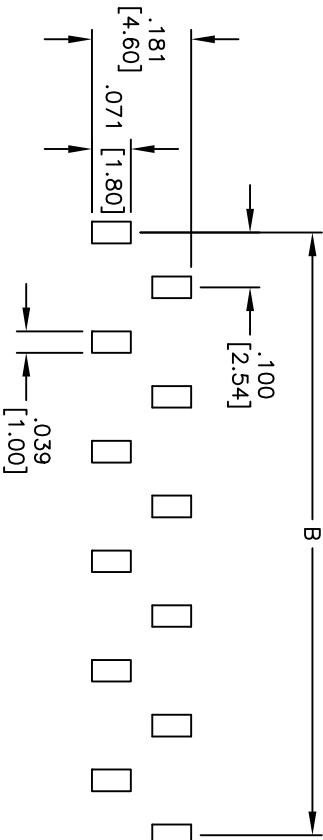

RECOMMENDED PCB LAYOUT

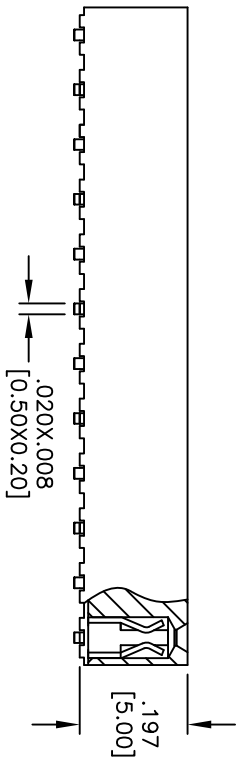

SPECIFICATIONS:

Material:

Insulator: Hi-temp thermoplastic, rated UL 94V-0

Insulator color: Black

Contacts: Phosphor Bronze

Plating:

Gold flash over Nickel underplate overall.

Electrical:

Current rating: 3 Amps max.

Contact resistance: 20 mohms max. initial

Insulation resistance: 500 Mohms min.

Dielectric withstanding voltage: 600 VAC for 1 minute

Temperature Rating:

Operating temperature: -40°C to +105°C

Environmental:

Lead free, RoHS compliant

Recommended soldering temp: 260°C for 5 seconds

A = .100 [2.54] x No. of Positions
B = .100 [2.54] x No. of Spaces

ADAM TECH

909 Rahway Avenue, Union, NJ 07083

Phone: 908-687-5000 Fax: 908-687-5710

TITLE

.100 [2.54] SINGLE ROW RECEPTACLE STRIP
.197 [5.00] HEIGHT, SMT, TYPE B

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES HOLES .X ± .10 Ø.X ± .10 .XX ± .020 Ø.XX ± .015 .XXX ± .015 Ø.XXX ± .010				ADAM TECH 909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710			
APPROVALS				TITLE			
DATE				.100 [2.54] SINGLE ROW RECEPTACLE STRIP .197 [5.00] HEIGHT, SMT, TYPE B			
DRAWN	DY	2/02/10		SIZE	PART NO.	REV	
CHECKED				X	RSM1-XX-G-SMT-B-L	-	
APPROVED				REF:	S00069T	SCALE: NTS	SHEET 1 OF 1