




## Three-Phase Bridge Rectifier, 400A MTP40008 Thru MTP40018

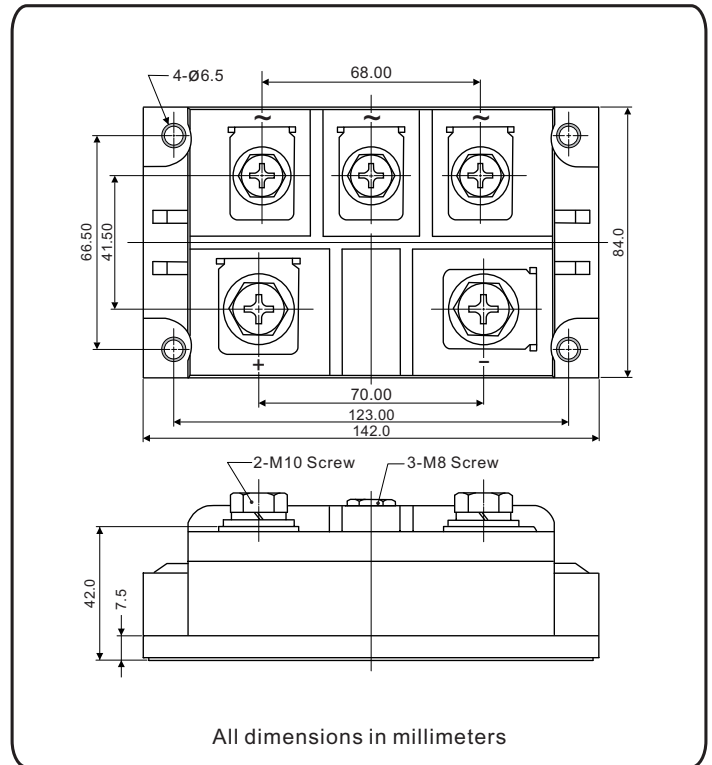

### FEATURES


- UL recognition file number E320098 
- Typical IR less than 5.0  $\mu$ A
- High surge current capability
- Low thermal resistance
- Compliant to RoHS 
- Isolation voltage up to 2500V

### TYPICAL APPLICATIONS

- DC power supplies for apparatus device
- Input rectifying power supplies for PWM converters
- Field supplies for DC motors
- Inverter welders

### ADVANTAGE

- International standard package  
Epoxy meets UL 94 V-O flammability rating
- Small volume, light weight
- Weight: 1100g (38.8 ozs)



### PRIMARY CHARACTERISTICS

$I_{F(AV)}$	400A
$V_{RRM}$	800V to 1800V
$I_{FSM}$	6000A
$I_R$	20 $\mu$ A
$V_F$	1.30V
$T_{J \max.}$	150°C


MAJOR RATINGS AND CHARACTERISTICS ( $T_A = 25^\circ\text{C}$ unless otherwise noted)							
PARAMETER	SYMBOL	MTP400					UNIT
		08	10	12	16	18	
Maximum repetitive peak reverse voltage	$V_{RRM}$	800	1000	1200	1600	1800	V
Peak reverse non-repetitive voltage	$V_{RSM}$	900	1100	1300	1700	1900	V
Maximum DC blocking voltage	$V_{DC}$	800	1000	1200	1600	1800	V
Maximum average forward rectified output current at $T_C = 100^\circ\text{C}$	$I_{F(AV)}$	400					A
Peak forward surge current single sine-wave superimposed on rated load	$I_{FSM}$	6000					A
Rating (non-repetitive, for t greater than 1 ms and less than 8.3 ms) for fusing	$I^2t$	149.4					$\text{KA}^2\text{s}$
RMS isolation voltage from case to leads	$V_{ISO}$	2500					V
Operating junction storage temperature range	$T_J$	-40 to 150					$^\circ\text{C}$
Storage temperature range	$T_{STG}$	-40 to 125					$^\circ\text{C}$

ELECTRICAL CHARACTERISTICS ( $T_A = 25^\circ\text{C}$ unless otherwise noted)								
PARAMETER	TEST CONDITIONS	SYMBOL	MTP400					UNIT
			08	10	12	16	18	
Maximum instantaneous forward drop per diode	$I_F = 400\text{A}$	$V_F$	1.30					V
Maximum reverse DC current at rated DC blocking voltage per diod	$T_A = 25^\circ\text{C}$	$I_R$	20					$\mu\text{A}$
	$T_A = 150^\circ\text{C}$		10					mA


THERMAL AND MECHANICAC ( $T_A = 25^\circ\text{C}$ unless otherwise noted)								
PARAMETER	TEST CONDITIONS	SYMBOL	MTP400					UNIT
			08	10	12	16	18	
Typical thermal resistance junction to case	Single-side heat dissipation, sine half wave	$R_{\theta JC}^{(1)}$	0.065					$^\circ\text{C/W}$
Mounting torque $\pm 10\%$	to heatsink M6 to terminal M8 to terminal M10	A mounting compound is recommended and the torque should be rechecked after a period of 3 hours to allow for the spread of the compound.	4					Nm
			10					
			12					
Approximate weight			1100					g

### Notes


(1) With heatsink, single side heat dissipation, half sine wave.

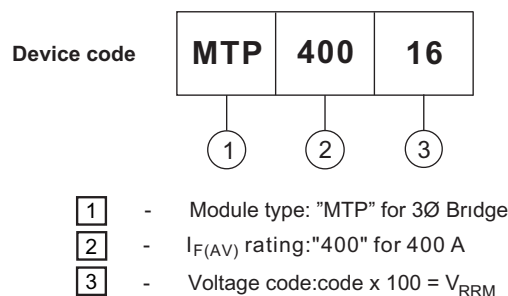


**Fig.1 Forward current vs. Forward voltage**

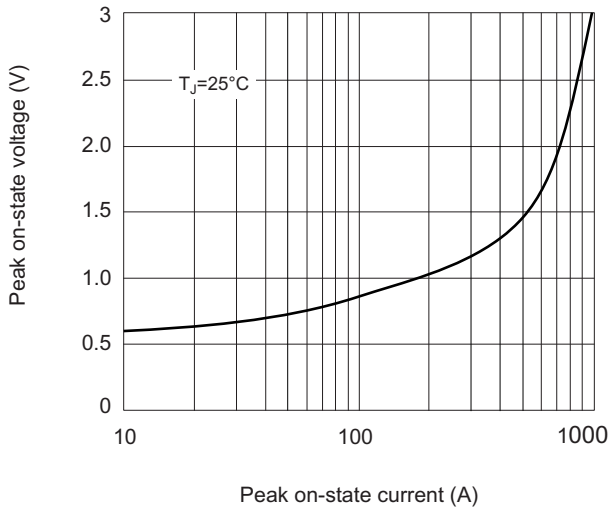


**Fig.2 Thermal Impedance (junction to case)**

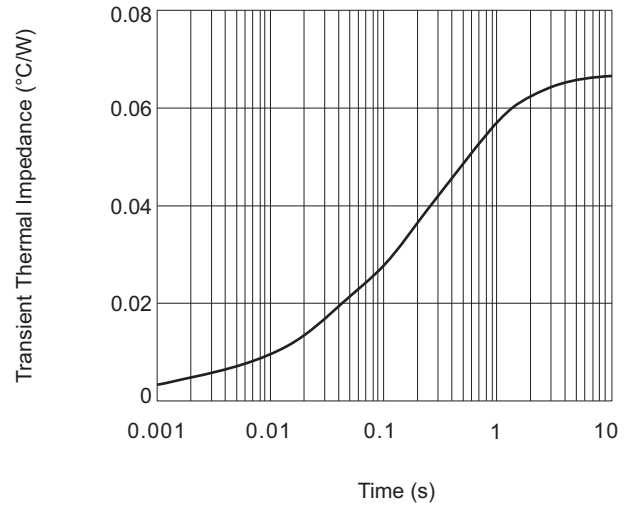


**Fig.3 Power Consumption vs. Average Current**

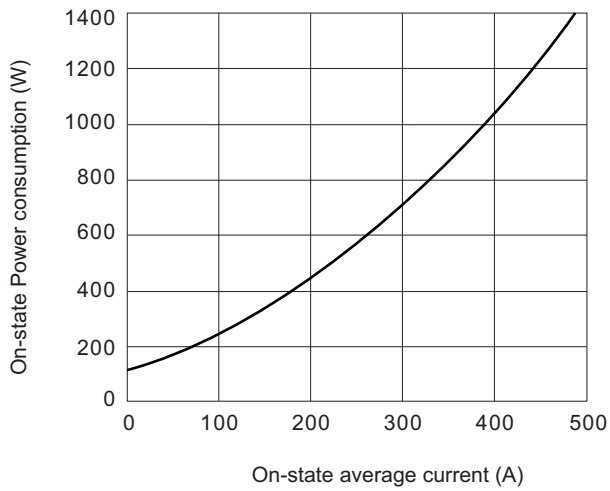

**Fig.4 Case Temperature vs. O-state Average Current**

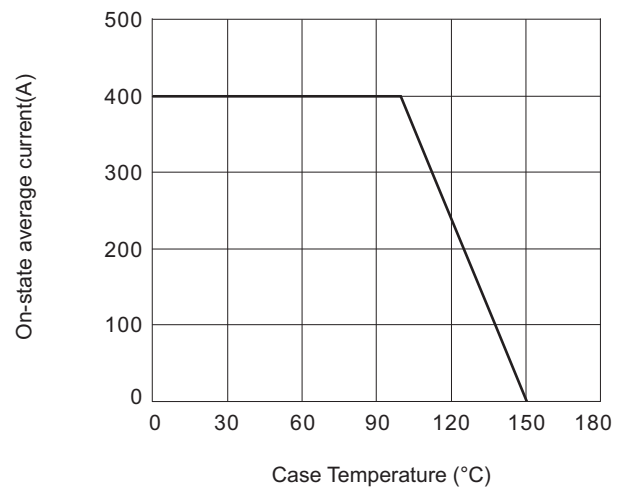

**Fig.5 Forward Surge Current vs. Cycle**

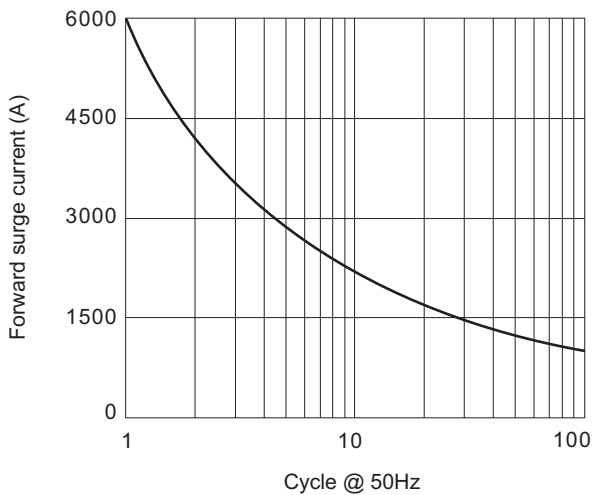

**Fig.6 I<sup>2</sup>t characteristic**

