
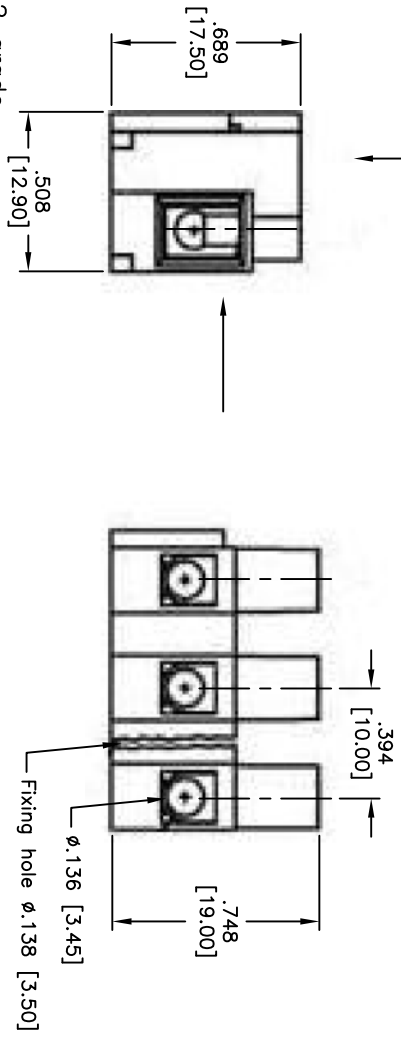


Rev	AWO #	Description	Date	Appr
-		RELEASED	5/21/10	

APPROVED: _____
 DATE: _____ TITLE: _____

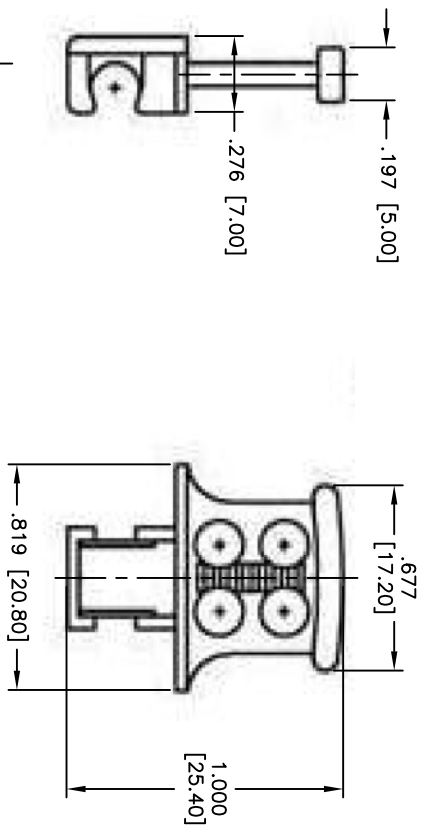

SPECIFICATIONS:

Material: Housing: Polyamide 6/6, rated UL 94V-2 grade
 Insert: Brass/Nickel plated, stainless steel
 Screw: M3X6 Blue chromated
 Earth Screw: M3x14 Blue chromated

Electrical:
 Voltage/Ampere (IEC) (UL)
 Terminal Strip: 400V/15A 200V/15A
 Fuse Holder: 250V/6.3A 200V/10A
 Mechanical:
 Cross Section: 2.5mm²/AWG14
 Temperature Rating:
 Operating temperature: -40°C to +100°C

Environmental:
 Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLES
.X ± .10	Ø.X ± .10
.XX ± .020	Ø.XX ± .015
.XXX ± .015	Ø.XXX ± .010
APPROVALS	DATE
DRAWN	DY
CHECKED	
APPROVED	

ADAM TECH
 909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

SIZE	PART NO.	REV.
X	TDK-XX-FH	
REF: S00047C	SCALE: NTS	SHEET 1 OF 1

FUSED TERMINAL, EURO STANDARD

6 5 4 3 2 1